www.ps.bam.de/DE95/10O/O95E03FP.PS/.PDF; linearized output
F: Output Linearization (OL) data DE95/10O/O95E03FP.DAT in File (F)

See for similar files: http://www.ps.bam.de/DE95/DE95.HTM
Information and Order: http://www.ps.bam.de Version 2.0, io=0,3; iORS; oORS, CIELAB

BAM registration: 20030101-DE95/10O/O95E03FP.PS/.PDF BAM material: code=rha4ta
application for measurement of monitor (Yr=2.5) and printer output

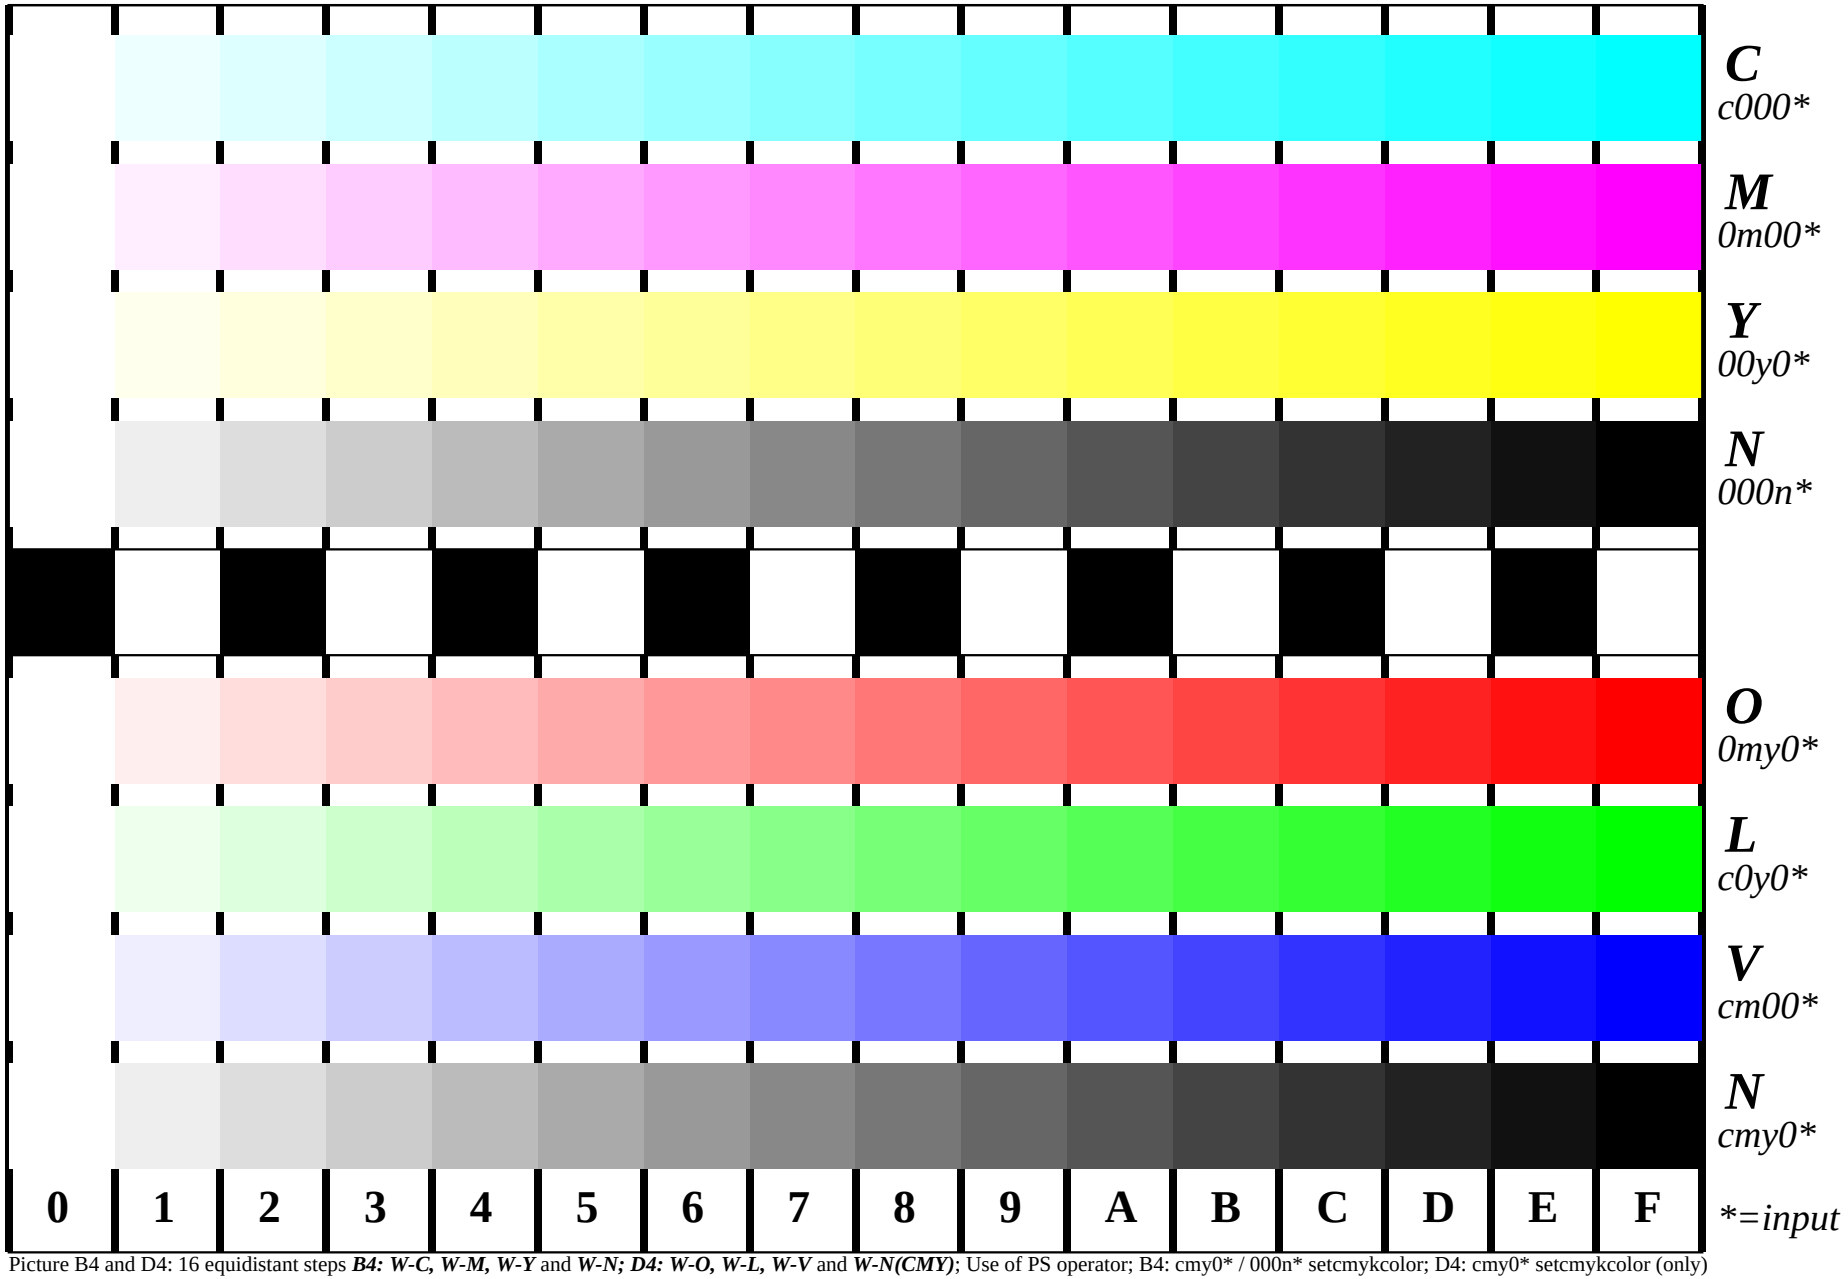

Picture B4 and D4: 16 equidistant steps ***B4: W-C, W-M, W-Y*** and ***W-N; D4: W-O, W-L, W-V*** and ***W-N(CMY)***; Use of PS operator; B4: cmy0* / 000n* setcmykcolor; D4: cmy0* setcmykcolor (only)

Fig. B4 of ISO/IEC-test chart 2 and
Fig. D4 of ISO/IEC-test chart no. 4;

ISO/IEC 15775 and
TR ISO/IEC 24705;

input: *cmyn* setcmykcolor*
output: *olv* / www* setrgbcolor*