

Technische Informationen: http://o2.ps.bam.de
 Bilddatei-Version 1.6, 20011020-33870-D10

BAM-Registrierung: 20011020-10
 BAM-Referenz-Material: Code=rh4ra-D10

i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*	Start-Ausgabe S1
1	12.8	0.0	0.0	12.8	0.01
2	18.37	0.0	0.0	13.24	5.13
3	23.95	0.0	0.0	13.63	10.32
4	29.52	0.0	0.0	13.63	10.32
5	35.09	0.0	0.0	13.63	10.32
6	40.66	0.0	0.0	13.63	10.32
7	46.24	0.0	0.0	13.63	10.32
8	51.81	0.0	0.0	13.63	10.32
9	57.38	0.0	0.0	13.63	10.32
10	62.95	0.0	0.0	13.63	10.32
11	68.53	0.0	0.0	13.63	10.32
12	74.1	0.0	0.0	13.63	10.32
13	79.67	0.0	0.0	13.63	10.32
14	85.24	0.0	0.0	13.63	10.32
15	90.82	0.0	0.0	13.63	10.32
16	96.39	0.0	0.0	13.63	10.32
17	12.8	0.0	0.0	12.8	0.01
18	33.7	0.0	0.0	24.92	8.78
19	54.59	0.0	0.0	47.85	6.75
20	75.49	0.0	0.0	71.81	3.68
21	96.39	0.0	0.0	96.39	0.01


Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
 nur L*-Helligkeit benutzt
 $\Delta L^* = 96.39 - 12.8$
 Gleichmaessigkeit
 $g^* = 49.3$
 Helligkeitsumfang rel. zu Offset
 $f^* = 108.0$
 ΔL^* -Grauvariation
 $v^* = 0.0$
 Mittlerer Helligkeitsabstand (16 Stufen)
 $\Delta E^*_{CIE\text{LAB}} = 5.4$
 Mittlerer Helligkeitsabstand (5 Stufen)
 $\Delta L^*_{CIE\text{LAB}} = 3.8$
 Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 77$

Device: (X); Meas.: X10GS1A.PS/.TXT; Date: M010203 www.ps.bam.de/DG02/10X/X10GS1A.PS/.TXT


i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*	Linearisierte Ausgabe S2
1	15.09	0.0	0.0	15.09	0.01
2	20.49	0.0	0.0	19.38	1.11
3	25.89	0.0	0.0	24.96	0.93
4	31.29	0.0	0.0	32.31	1.02
5	36.68	0.0	0.0	36.41	0.27
6	42.08	0.0	0.0	41.21	0.87
7	47.48	0.0	0.0	47.38	0.1
8	52.88	0.0	0.0	53.37	0.49
9	58.28	0.0	0.0	59.19	0.91
10	63.68	0.0	0.0	61.58	2.1
11	69.08	0.0	0.0	66.43	2.65
12	74.48	0.0	0.0	73.62	0.86
13	79.87	0.0	0.0	79.59	0.28
14	85.27	0.0	0.0	86.49	1.22
15	90.67	0.0	0.0	90.4	0.27
16	96.07	0.0	0.0	96.07	0.01
17	15.09	0.0	0.0	15.09	0.01
18	35.34	0.0	0.0	35.39	0.05
19	55.58	0.0	0.0	56.28	0.7
20	75.82	0.0	0.0	75.11	0.71
21	96.07	0.0	0.0	96.07	0.01

Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
 nur L*-Helligkeit benutzt
 $\Delta L^* = 96.07 - 15.09$
 Gleichmaessigkeit
 $g^* = 89.9$
 Helligkeitsumfang rel. zu Offset
 $f^* = 104.6$
 ΔL^* -Grauvariation
 $v^* = 0.0$
 Mittlerer Helligkeitsabstand (16 Stufen)
 $\Delta E^*_{CIE\text{LAB}} = 0.8$
 Mittlerer Helligkeitsabstand (5 Stufen)
 $\Delta L^*_{CIE\text{LAB}} = 0.3$
 Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 97$

Device: (X); Meas.: X10GS2A.PS/.TXT; Date: M010203 www.ps.bam.de/DG02/10X/X10GS2A.PS/.TXT

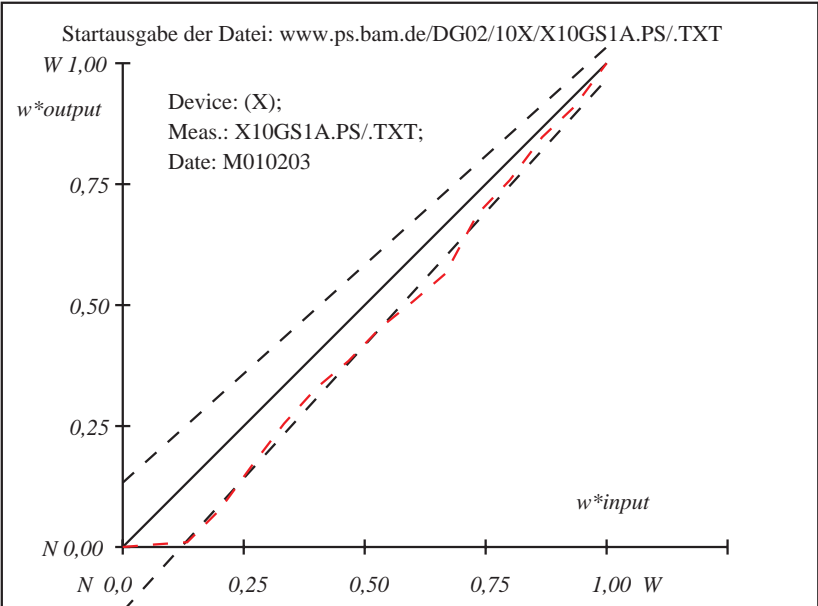

Device: (X); Meas.: X10GS1A.PS/.TXT; Date: M010203 www.ps.bam.de/DG02/10X/X10GS1A.PS/.TXT

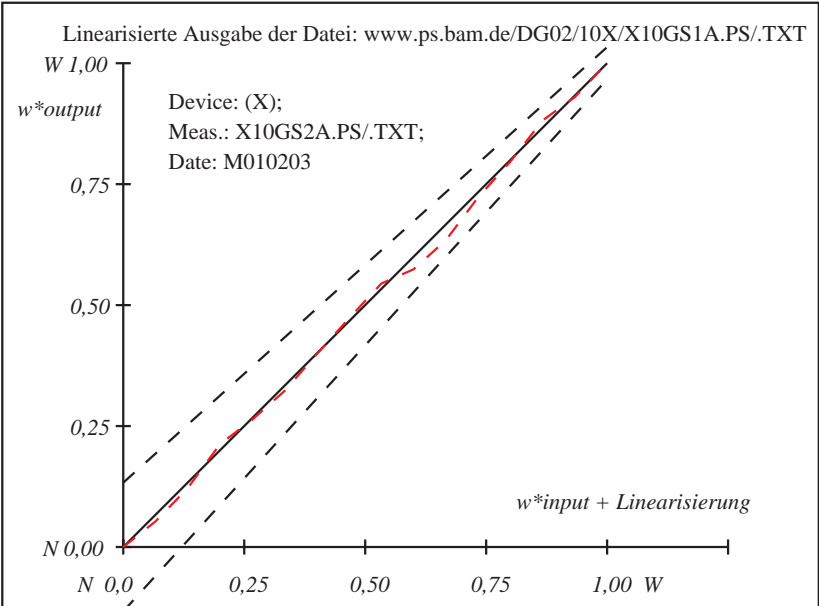

Device: (X); Meas.: X10GS2A.PS/.TXT; Date: M010203 www.ps.bam.de/DG02/10X/X10GS2A.PS/.TXT