

i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*	Start-Ausgabe S1
1	18.0	0.0	0.0	0.01	Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
2	23.16	0.0	0.0	14.84	nur L^* -Helligkeit benutzt
3	28.32	0.0	0.0	17.98	$\Delta L^* = 95.4 - 18.0$
4	33.48	0.0	0.0	19.12	Gleichmaessigkeit
5	38.64	0.0	0.0	19.36	$g^* = 28.6$
6	43.8	0.0	0.0	18.9	Helligkeitsumfang rel. zu Offset
7	48.96	0.0	0.0	18.04	$f^* = 100.0$
8	54.12	0.0	0.0	16.78	ΔL^* -Grauvariation
9	59.28	0.0	0.0	15.22	$v^* = 0.0$
10	64.44	0.0	0.0	13.56	Mittlerer Helligkeitsabstand (16 Stufen)
11	69.6	0.0	0.0	11.6	$\Delta E^*_{CIELAB} = 11.8$
12	74.76	0.0	0.0	8.64	
13	79.92	0.0	0.0	7.28	
14	85.08	0.0	0.0	5.02	
15	90.24	0.0	0.0	2.56	
16	95.4	0.0	0.0	0.01	
17	18.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	19.3	
19	56.7	0.0	0.0	16.0	
20	76.05	0.0	0.0	8.3	
21	95.4	0.0	0.0	0.01	


Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 49$

Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01


i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*	Linearisierte Ausgabe S2
1	18.0	0.0	0.0	0.01	Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
2	23.16	0.0	0.0	0.04	nur L^* -Helligkeit benutzt
3	28.32	0.0	0.0	0.02	$\Delta L^* = 95.4 - 18.0$
4	33.48	0.0	0.0	0.02	Gleichmaessigkeit
5	38.64	0.0	0.0	0.04	$g^* = 99.7$
6	43.8	0.0	0.0	0.01	Helligkeitsumfang rel. zu Offset
7	48.96	0.0	0.0	0.04	$f^* = 100.0$
8	54.12	0.0	0.0	0.02	ΔL^* -Grauvariation
9	59.28	0.0	0.0	0.02	$v^* = 0.0$
10	64.44	0.0	0.0	0.04	Mittlerer Helligkeitsabstand (16 Stufen)
11	69.6	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 0.0$
12	74.76	0.0	0.0	0.04	
13	79.92	0.0	0.0	0.02	
14	85.08	0.0	0.0	0.02	
15	90.24	0.0	0.0	0.04	
16	95.4	0.0	0.0	0.01	
17	18.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	0.03	
19	56.7	0.0	0.0	0.01	
20	76.05	0.0	0.0	0.03	
21	95.4	0.0	0.0	0.01	

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 100$

Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S21

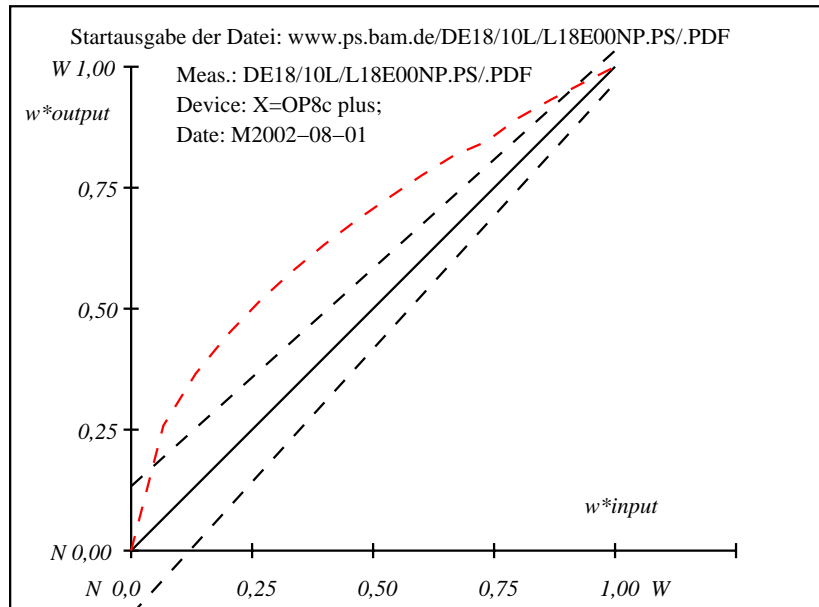

Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01

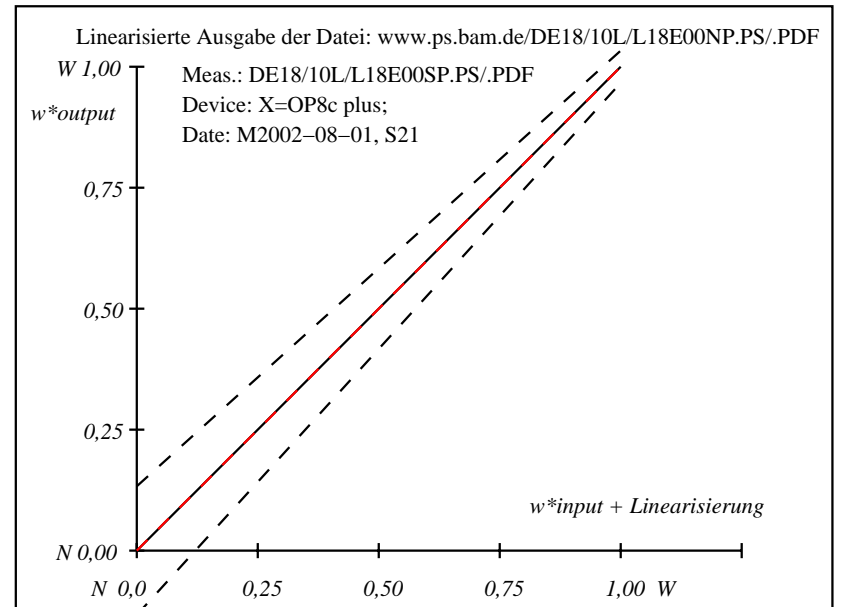

Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S21

i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*	Start-Ausgabe S1
1	18.0	0.0	0.0	0.0	Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
2	23.16	0.0	0.0	14.84	nur L*-Helligkeit benutzt
3	28.32	0.0	0.0	17.98	$\Delta L^* = 95.4 - 18.0$
4	33.48	0.0	0.0	19.12	Gleichmaessigkeit
5	38.64	0.0	0.0	19.36	$g^* = 28.6$
6	43.8	0.0	0.0	18.9	
7	48.96	0.0	0.0	18.04	
8	54.12	0.0	0.0	16.78	
9	59.28	0.0	0.0	15.22	Helligkeitsumfang rel. zu Offset
10	64.44	0.0	0.0	13.56	$f^* = 100.0$
11	69.6	0.0	0.0	11.6	
12	74.76	0.0	0.0	8.64	ΔL^* -Grauvariation
13	79.92	0.0	0.0	7.28	$v^* = 0.0$
14	85.08	0.0	0.0	5.02	
15	90.24	0.0	0.0	2.56	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.4	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 11.8$
17	18.0	0.0	0.0	0.0	
18	37.35	0.0	0.0	19.3	
19	56.7	0.0	0.0	16.0	
20	76.05	0.0	0.0	8.3	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.4	0.0	0.0	0.0	$\Delta L^*_{CIELAB} = 8.7$


Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 49$

Meas.: DE18/10L/L18E00NP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01


i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*	Linearisierte Ausgabe S2
1	18.0	0.0	0.0	0.0	Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
2	23.16	0.0	0.0	0.04	nur L*-Helligkeit benutzt
3	28.32	0.0	0.0	-0.01	$\Delta L^* = 95.4 - 18.0$
4	33.48	0.0	0.0	0.02	Gleichmaessigkeit
5	38.64	0.0	0.0	-0.03	$g^* = 99.7$
6	43.8	0.0	0.0	0.0	
7	48.96	0.0	0.0	0.04	
8	54.12	0.0	0.0	-0.01	
9	59.28	0.0	0.0	0.02	Helligkeitsumfang rel. zu Offset
10	64.44	0.0	0.0	-0.03	$f^* = 100.0$
11	69.6	0.0	0.0	0.0	
12	74.76	0.0	0.0	0.04	ΔL^* -Grauvariation
13	79.92	0.0	0.0	-0.01	$v^* = 0.0$
14	85.08	0.0	0.0	0.02	
15	90.24	0.0	0.0	-0.03	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.4	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 0.0$
17	18.0	0.0	0.0	0.0	
18	37.35	0.0	0.0	-0.02	
19	56.7	0.0	0.0	0.0	
20	76.05	0.0	0.0	0.03	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.4	0.0	0.0	0.0	$\Delta L^*_{CIELAB} = 0.0$

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 100$

Meas.: DE18/10L/L18E00SP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S22

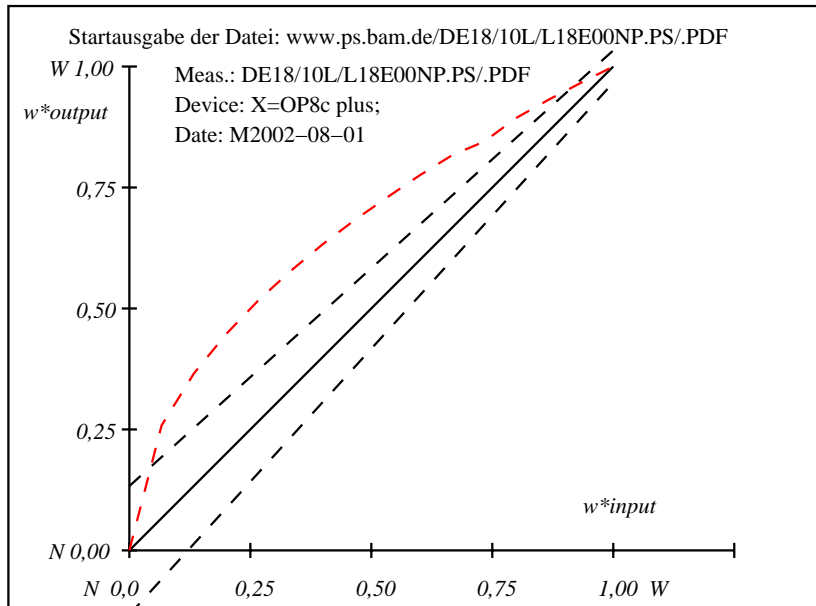

Meas.: DE18/10L/L18E00NP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01

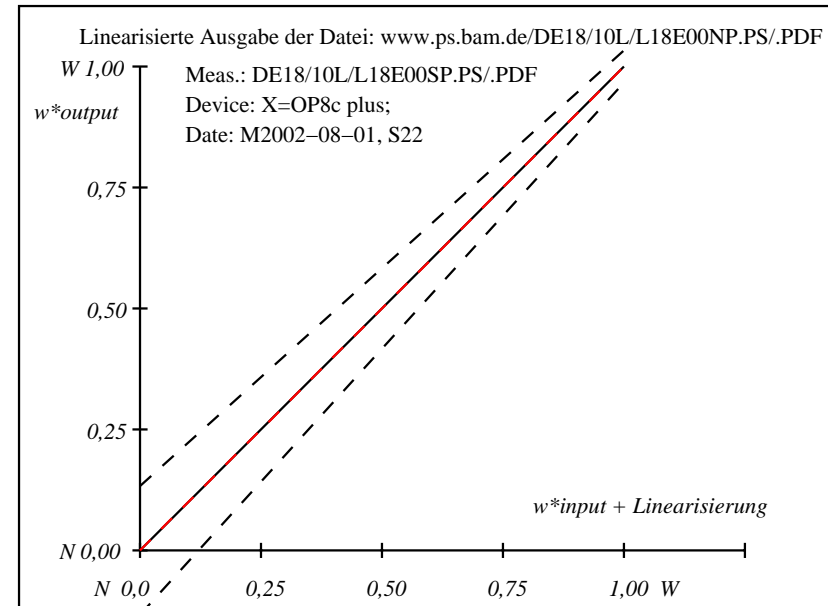

Meas.: DE18/10L/L18E00SP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S22

i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*
1	18.0	0.0	0.0	0.01
2	23.16	0.0	0.0	14.84
3	28.32	0.0	0.0	17.98
4	33.48	0.0	0.0	19.12
5	38.64	0.0	0.0	19.36
6	43.8	0.0	0.0	18.9
7	48.96	0.0	0.0	18.04
8	54.12	0.0	0.0	16.78
9	59.28	0.0	0.0	15.22
10	64.44	0.0	0.0	13.56
11	69.6	0.0	0.0	11.6
12	74.76	0.0	0.0	8.64
13	79.92	0.0	0.0	7.28
14	85.08	0.0	0.0	5.02
15	90.24	0.0	0.0	2.56
16	95.4	0.0	0.0	0.01
17	18.0	0.0	0.0	0.01
18	37.35	0.0	0.0	19.3
19	56.7	0.0	0.0	16.0
20	76.05	0.0	0.0	8.3
21	95.4	0.0	0.0	0.01


Start-Ausgabe S1
Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
 nur L^* -Helligkeit benutzt
 $\Delta L^* = 95.4 - 18.0$
 Gleichmaessigkeit $g^* = 28.6$
 Helligkeitsumfang rel. zu Offset $f^* = 100.0$
 ΔL^* -Grauvariation $v^* = 0.0$
 Mittlerer Helligkeitsabstand (16 Stufen) $\Delta E^*_{CIELAB} = 11.8$
 Mittlerer Helligkeitsabstand (5 Stufen) $\Delta L^*_{CIELAB} = 8.7$
 Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 49$

Meas.: DE18/10L/L18E00NP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01


i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*
1	18.0	0.0	0.0	0.01
2	23.16	0.0	0.0	0.04
3	28.32	0.0	0.0	-0.01
4	33.48	0.0	0.0	5.12
5	38.64	0.0	0.0	-5.13
6	43.8	0.0	0.0	0.0
7	48.96	0.0	0.0	0.04
8	54.12	0.0	0.0	2.58
9	59.28	0.0	0.0	-2.57
10	64.44	0.0	0.0	-0.03
11	69.6	0.0	0.0	0.0
12	74.76	0.0	0.0	5.14
13	79.92	0.0	0.0	-5.11
14	85.08	0.0	0.0	0.02
15	90.24	0.0	0.0	-0.03
16	95.4	0.0	0.0	0.0
17	18.0	0.0	0.0	0.0
18	37.35	0.0	0.0	-2.56
19	56.7	0.0	0.0	0.0
20	76.05	0.0	0.0	2.57
21	95.4	0.0	0.0	0.0

Linearisierte Ausgabe S2
Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
 nur L^* -Helligkeit benutzt
 $\Delta L^* = 95.4 - 18.0$
 Gleichmaessigkeit $g^* = 76.5$
 Helligkeitsumfang rel. zu Offset $f^* = 100.0$
 ΔL^* -Grauvariation $v^* = 1.69$
 Mittlerer Helligkeitsabstand (16 Stufen) $\Delta E^*_{CIELAB} = 1.6$
 Mittlerer Helligkeitsabstand (5 Stufen) $\Delta L^*_{CIELAB} = 1.0$
 Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 93$

Meas.: DE18/10L/L18E00SP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S27

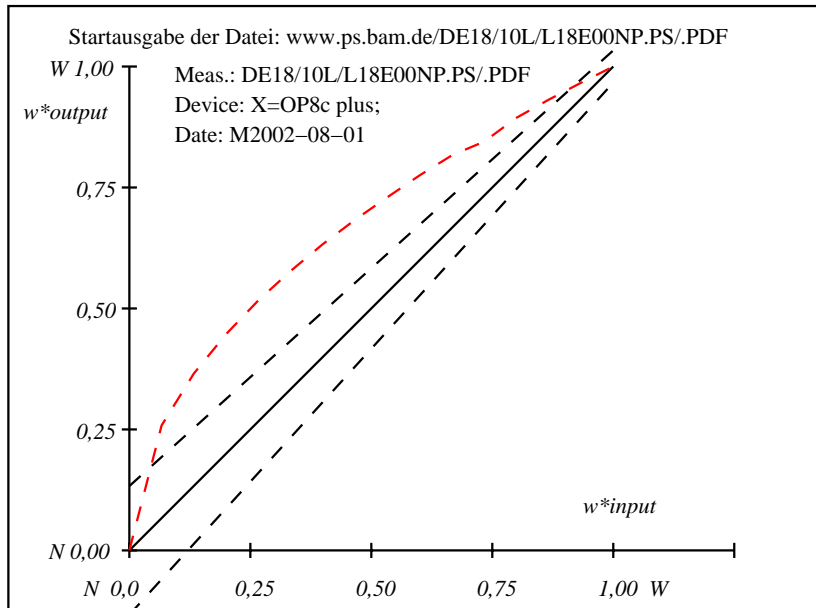

Meas.: DE18/10L/L18E00NP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01

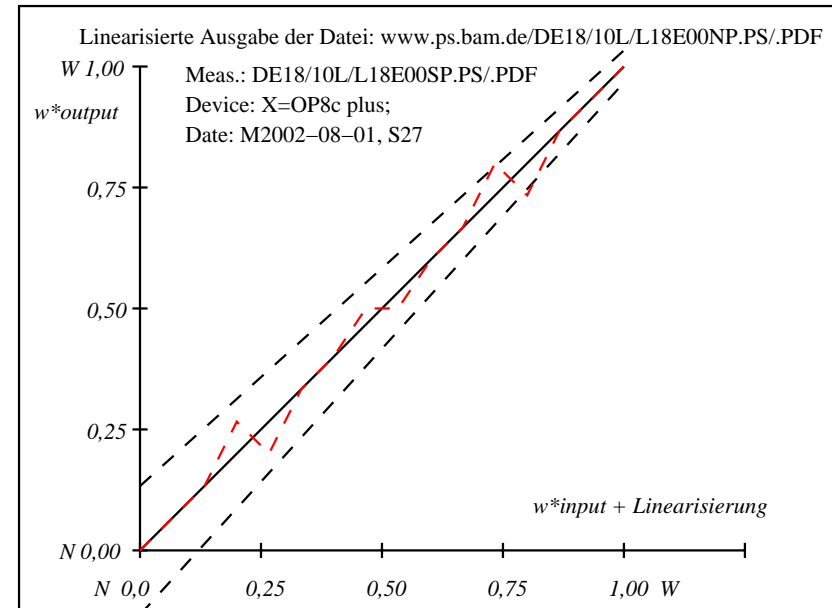

Meas.: DE18/10L/L18E00SP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S27

i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*
1	18.0	0.0	0.0	0.01
2	23.16	0.0	0.0	14.84
3	28.32	0.0	0.0	17.98
4	33.48	0.0	0.0	19.12
5	38.64	0.0	0.0	19.36
6	43.8	0.0	0.0	18.9
7	48.96	0.0	0.0	18.04
8	54.12	0.0	0.0	16.78
9	59.28	0.0	0.0	15.22
10	64.44	0.0	0.0	13.56
11	69.6	0.0	0.0	11.6
12	74.76	0.0	0.0	8.64
13	79.92	0.0	0.0	7.28
14	85.08	0.0	0.0	5.02
15	90.24	0.0	0.0	2.56
16	95.4	0.0	0.0	0.01
17	18.0	0.0	0.0	0.01
18	37.35	0.0	0.0	19.3
19	56.7	0.0	0.0	16.0
20	76.05	0.0	0.0	8.3
21	95.4	0.0	0.0	0.01


Start-Ausgabe S1
Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
 nur L^* -Helligkeit benutzt
 $\Delta L^* = 95.4 - 18.0$
 Gleichmaessigkeit
 $g^* = 28.6$
 Helligkeitsumfang rel. zu Offset
 $f^* = 100.0$
 ΔL^* -Grauvariation
 $v^* = 0.0$
 Mittlerer Helligkeitsabstand (16 Stufen)
 $\Delta E^*_{CIELAB} = 11.8$
 Mittlerer Helligkeitsabstand (5 Stufen)
 $\Delta L^*_{CIELAB} = 8.7$
 Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 49$

Meas.: DE18/10L/L18E00NP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01


i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*
1	18.0	0.0	0.0	0.01
2	23.16	0.0	0.0	0.04
3	28.32	0.0	0.0	-0.01
4	33.48	0.0	0.0	5.12
5	38.64	0.0	0.0	-5.13
6	43.8	0.0	0.0	0.0
7	48.96	0.0	0.0	0.04
8	54.12	0.0	0.0	2.58
9	59.28	0.0	0.0	-2.57
10	64.44	0.0	0.0	-0.03
11	69.6	0.0	0.0	0.0
12	74.76	0.0	0.0	5.14
13	79.92	0.0	0.0	-5.11
14	85.08	0.0	0.0	0.02
15	90.24	0.0	0.0	-0.03
16	95.4	0.0	0.0	0.0
17	18.0	0.0	0.0	0.0
18	37.35	0.0	0.0	-2.56
19	56.7	0.0	0.0	0.0
20	76.05	0.0	0.0	2.57
21	95.4	0.0	0.0	0.0

Linearisierte Ausgabe S2
Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
 nur L^* -Helligkeit benutzt
 $\Delta L^* = 95.4 - 18.0$
 Gleichmaessigkeit
 $g^* = 76.5$
 Helligkeitsumfang rel. zu Offset
 $f^* = 100.0$
 ΔL^* -Grauvariation
 $v^* = 1.69$
 Mittlerer Helligkeitsabstand (16 Stufen)
 $\Delta E^*_{CIELAB} = 1.6$
 Mittlerer Helligkeitsabstand (5 Stufen)
 $\Delta L^*_{CIELAB} = 1.0$
 Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 93$

Meas.: DE18/10L/L18E00SP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S28

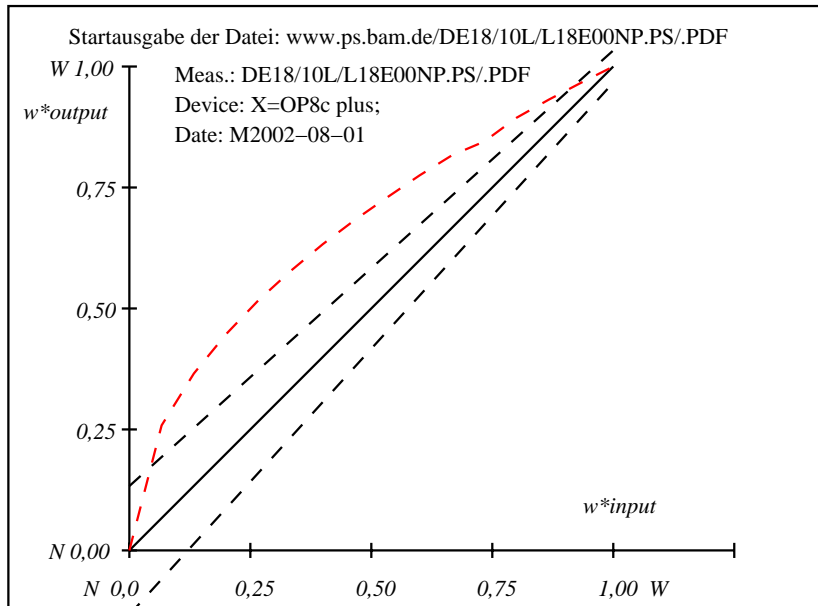

Meas.: DE18/10L/L18E00NP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01

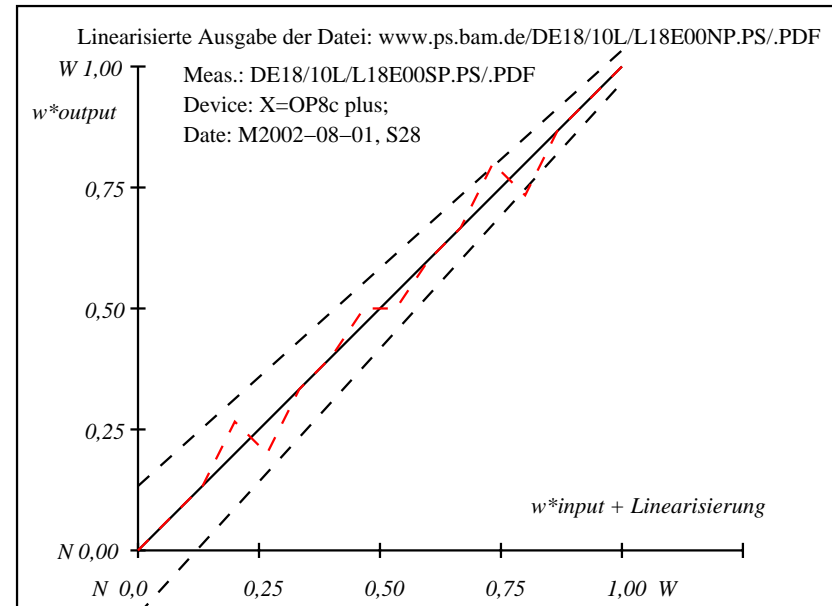

Meas.: DE18/10L/L18E00SP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S28

i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*
1	18.0	0.0	0.0	0.01
2	23.16	0.0	0.0	14.84
3	28.32	0.0	0.0	17.98
4	33.48	0.0	0.0	19.12
5	38.64	0.0	0.0	19.36
6	43.8	0.0	0.0	18.9
7	48.96	0.0	0.0	18.04
8	54.12	0.0	0.0	16.78
9	59.28	0.0	0.0	15.22
10	64.44	0.0	0.0	13.56
11	69.6	0.0	0.0	11.6
12	74.76	0.0	0.0	8.64
13	79.92	0.0	0.0	7.28
14	85.08	0.0	0.0	5.02
15	90.24	0.0	0.0	2.56
16	95.4	0.0	0.0	0.01
17	18.0	0.0	0.0	0.01
18	37.35	0.0	0.0	19.3
19	56.7	0.0	0.0	16.0
20	76.05	0.0	0.0	8.3
21	95.4	0.0	0.0	0.01


Start-Ausgabe S1
Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
 nur L*-Helligkeit benutzt
 $\Delta L^* = 95.4 - 18.0$
 Gleichmaessigkeit $g^* = 28.6$
 Helligkeitsumfang rel. zu Offset $f^* = 100.0$
 ΔL^* -Grauvariation $v^* = 0.0$
 Mittlerer Helligkeitsabstand (16 Stufen) $\Delta E^*_{CIELAB} = 11.8$
 Mittlerer Helligkeitsabstand (5 Stufen) $\Delta L^*_{CIELAB} = 8.7$
 Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 49$

Meas.: DE18/10L/L18E00NP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01


i	LAB*ref	LAB*out	LAB*out/c-ref	ΔE^*
1	18.0	0.0	0.0	0.01
2	23.16	0.0	0.0	0.04
3	28.32	0.0	0.0	0.02
4	33.48	0.0	0.0	10.32
5	38.64	0.0	0.0	0.04
6	43.8	0.0	0.0	10.3
7	48.96	0.0	0.0	0.04
8	54.12	0.0	0.0	10.28
9	59.28	0.0	0.0	0.02
10	64.44	0.0	0.0	10.34
11	69.6	0.0	0.0	0.01
12	74.76	0.0	0.0	10.34
13	79.92	0.0	0.0	0.02
14	85.08	0.0	0.0	10.28
15	90.24	0.0	0.0	0.04
16	95.4	0.0	0.0	0.01
17	18.0	0.0	0.0	0.01
18	37.35	0.0	0.0	2.55
19	56.7	0.0	0.0	5.15
20	76.05	0.0	0.0	7.75
21	95.4	0.0	0.0	0.01

Linearisierte Ausgabe S2
Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
 nur L*-Helligkeit benutzt
 $\Delta L^* = 95.4 - 18.0$
 Gleichmaessigkeit $g^* = 52.8$
 Helligkeitsumfang rel. zu Offset $f^* = 100.0$
 ΔL^* -Grauvariation $v^* = 0.0$
 Mittlerer Helligkeitsabstand (16 Stufen) $\Delta E^*_{CIELAB} = 3.9$
 Mittlerer Helligkeitsabstand (5 Stufen) $\Delta L^*_{CIELAB} = 3.1$
 Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 83$

Meas.: DE18/10L/L18E00SP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S29

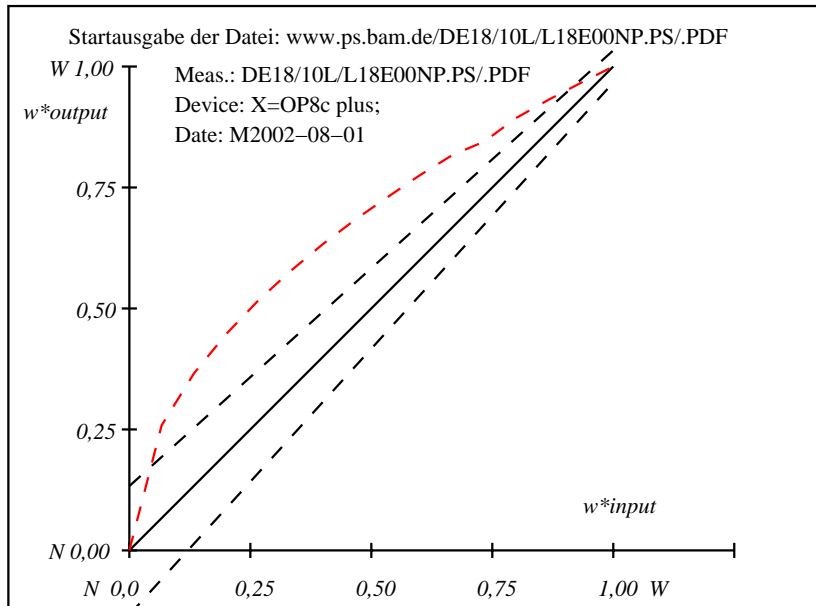

Meas.: DE18/10L/L18E00NP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01

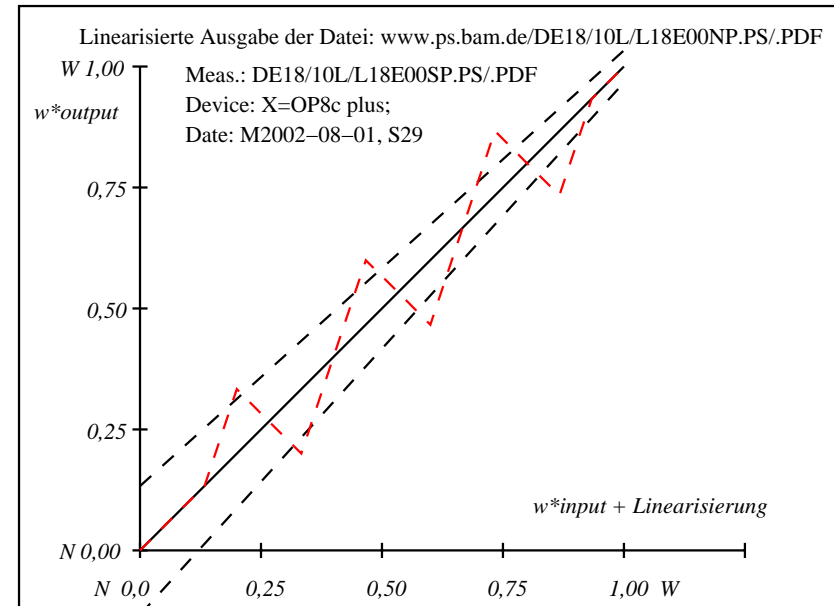

Meas.: DE18/10L/L18E00SP.PS/PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S29