



See for similar files: <http://www.ps.bam.de/EE87/>
 Information and Order: <http://www.ps.bam.de/>

Version 2.0, io=1,1?

BAM registration: 20031201-EE87/10F/F87E00SP.PS/.PDF
 Top part of page: application for monitors (Yr=2.5) and printers
 BAM material: code=th4t4

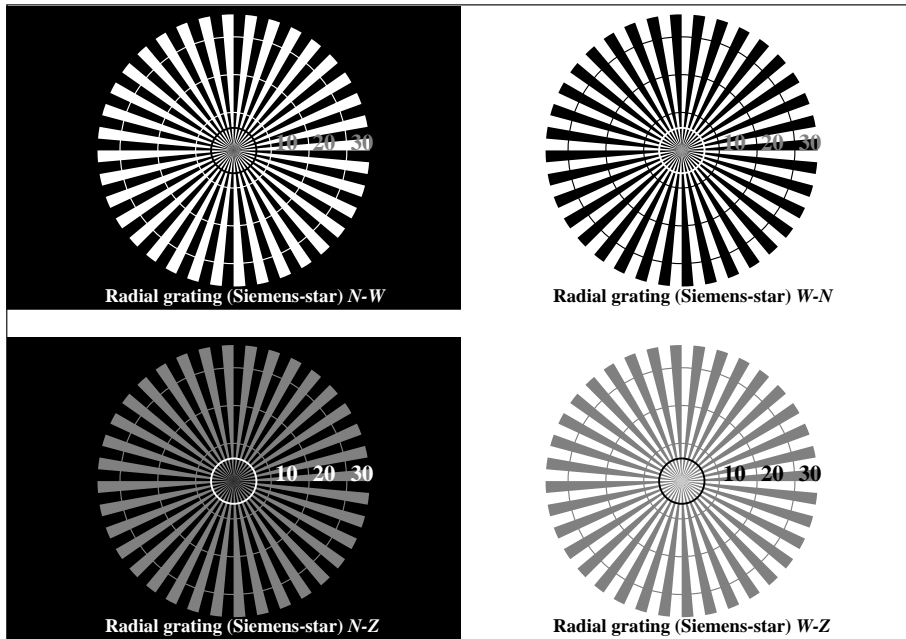

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *w*lin 1.0 exp setgray*

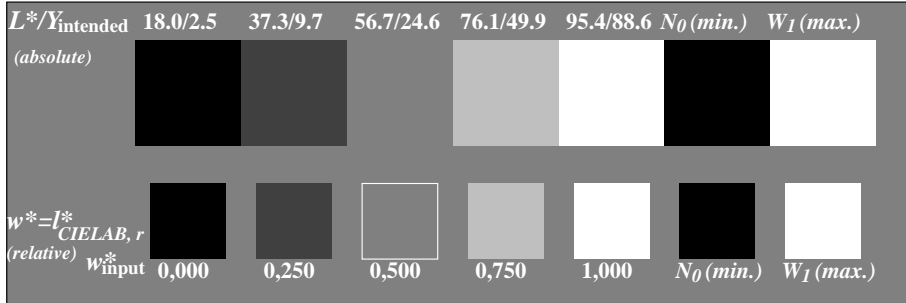


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_I ; PS operator: *w*lin 1.0 exp setgray*




Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *w*lin 1.0 exp setgray*; use file www.ps.bam.de/EE87/10F/F87E00SA.PS/ or [/F87E00SP.PS/](http://www.ps.bam.de/EE87/10F/F87E00SP.PS/) for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3 according to ISO/IEC 15775 and input: *w*lin 1.0 exp setgray*
 DIS ISO/IEC 19839-X; output: *Startup (S) data dependend*

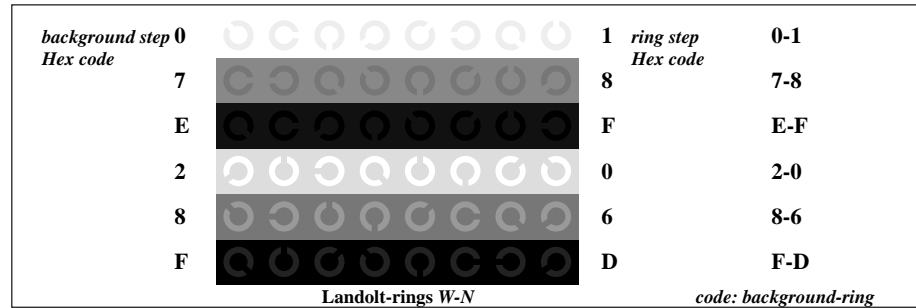

Picture C4: Landolt-rings W-N; PS operator: *w*lin 1.0 exp setgray*

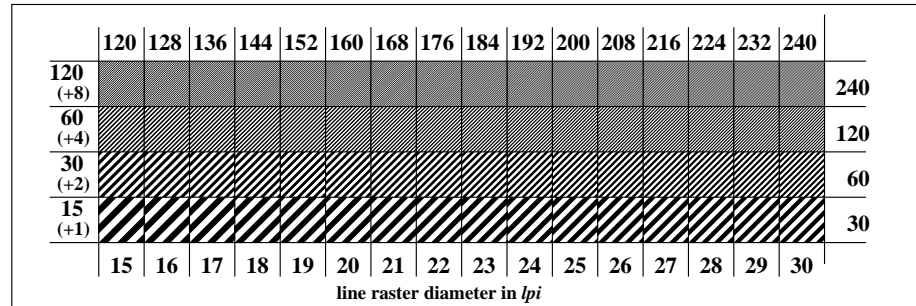

Picture C5: Line raster under 45° (or 135°); PS operator: *w*lin 1.0 exp setgray*

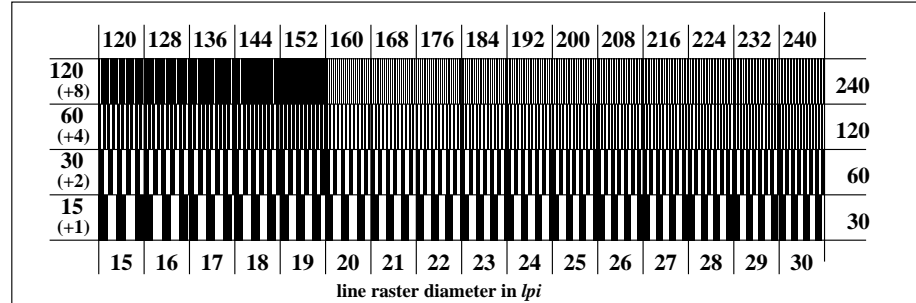

Picture C6: Line raster under 90° (or 0°); PS operator: *w*lin 1.0 exp setgray*