



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $w w w^* \text{setrgbcolor}$

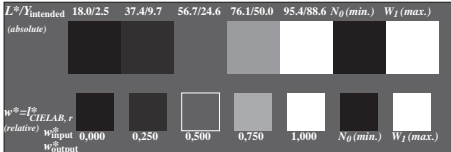


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_I ; PS operator: $w w w^* \text{setrgbcolor}$




Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $w w w^* \text{setrgbcolor}$; use file www.bam.de/KE89/10S/S89E00FA.PS/ or [/S89E00FP.PS/](http://www.bam.de/S89E00FP.PS/) PDF for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to
 ISO/IEC 15775 and input: $w w w^* \text{lin } 1.0 \text{ exp setrgbcolor}$
 DIS ISO/IEC 19839-X; output: $c m y 0^* / 000 n^* \text{ setcmykcolor}$

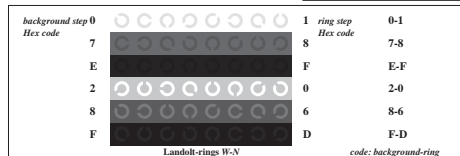

Picture C4: Landolt-rings W-N; PS operator: $w w w^* \text{setrgbcolor}$

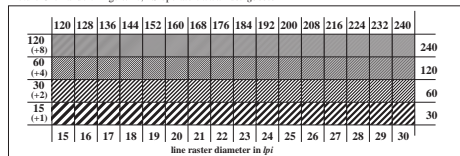

Picture C5: Line raster under 45° (or 135°); PS operator: $w w w^* \text{setrgbcolor}$



Picture C6: Line raster under 90° (or 0°); Use of the PS operator $w w w^* \text{setrgbcolor}$