
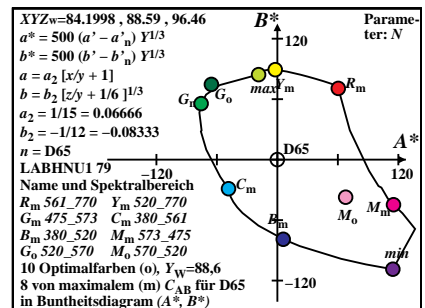
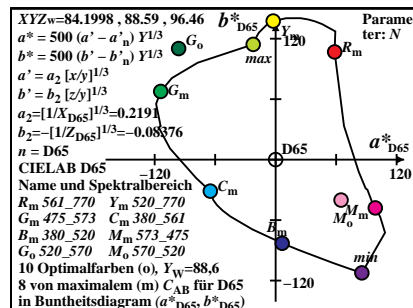
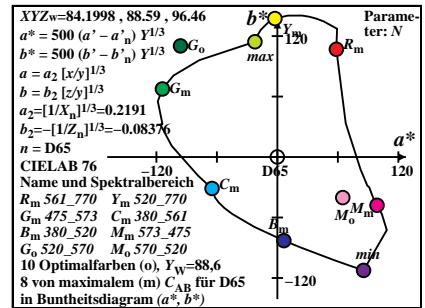
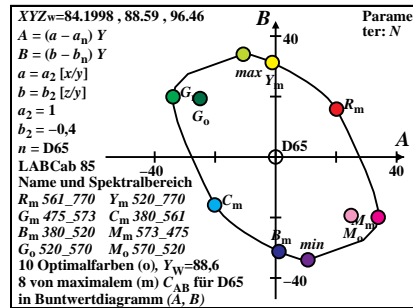
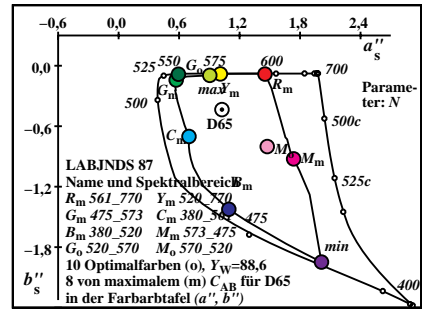
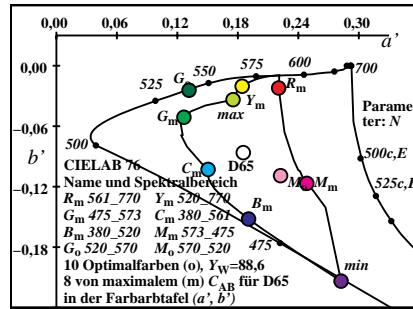
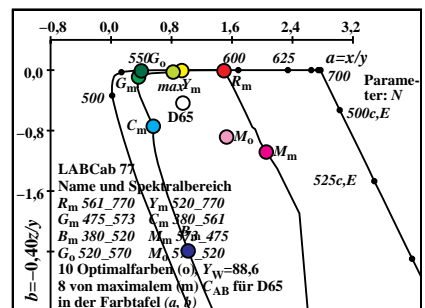


**Ostwald-Optimalfarben (o) von maximalem (m)  $C_{AB}$  für D65,  $Y_N=2,5$ ,  $Y_W=88,6$ ,  $Y_m=520$  770**

$i_1, \lambda_1$	$i_2, \lambda_2$	$X_{88,6}$	$Y_{88,6}$	$Z_{88,6}$	$x$	$y$	$z$	$h_{xy}$	$i_d, \lambda_d$	$i_c, \lambda_c$	Code
0	405	32 561	30.34	52.5	95.82	0.1698	0.2938	0.5362	193.8	16 483	37 589 Cm
6	435	32 562	27.42	53.11	79.11	0.1717	0.3326	0.4955	178.5	17 486	42 610
10	450	32 563	22.23	53.83	47.81	0.1794	0.4345	0.3859	141.5	19 496	-1 496c
12	460	33 565	20.17	54.2	32.01	0.1895	0.5094	0.3009	124.2	21 505	-1 505c
12	465	33 567	21.24	55.55	32.01	0.1952	0.5105	0.2942	122.8	21 506	-1 506c
14	470	33 569	21.05	56.75	19.92	0.2154	0.5806	0.2038	111.1	24 520	-1 520c
15	475	34 573	22.93	58.82	15.56	0.2356	0.6043	0.1599	105.6	25 528	-1 528c Gm
16	480	36 570	27.09	62.51	12.24	0.2659	0.6138	0.1202	99.2	27 537	-1 537c
17	485	39 595	38.4	70.16	9.81	0.3243	0.5927	0.0828	87.4	29 548	-1 548c
18	490	-1 490c	68.75	83.26	8.0	0.4296	0.5203	0.05	58.5	33 565	11 459 max
19	495	-1 495c	68.7	81.97	6.61	0.4368	0.5211	0.042	57.1	33 566	12 462
20	500	-1 500c	68.69	80.35	5.53	0.4443	0.5197	0.0358	55.3	33 567	12 464
22	510	-1 510c	68.58	75.92	4.13	0.4614	0.5107	0.0278	50.6	33 569	13 469
23	520	-1 519c	68.38	73.09	3.72	0.4709	0.5033	0.0256	47.7	34 570	14 471 Ym
25	530	-1 529c	67.41	66.25	3.21	0.4924	0.484	0.0235	40.7	34 573	15 475
27	540	-1 539c	65.45	58.38	2.95	0.5162	0.4604	0.0232	32.8	35 577	15 478
28	545	-1 544c	64.07	54.27	2.88	0.5285	0.4476	0.0237	28.7	35 579	15 479
29	550	-1 549c	62.39	50.08	2.83	0.541	0.4343	0.0245	24.7	36 582	16 480
30	555	-1 554c	60.41	45.89	2.8	0.5536	0.4206	0.0257	20.8	36 584	16 481
32	560	-1 560c	55.56	37.8	2.77	0.5779	0.3932	0.0288	13.6	37 589	16 483
32	561	0	405	64.69	47.49	0.5164	0.3791	0.1043	13.8	37 589	16 483 Rm
32	562	6	435	67.62	46.88	0.4687	0.3249	0.2063	358.5	42 610	17 486
32	563	10	450	72.8	46.16	0.4043	0.2564	0.3392	321.6	-1 496c	19 496
33	565	12	460	74.87	45.79	0.379	0.2318	0.3891	304.3	-1 505c	21 505
33	567	12	465	73.79	44.44	0.3782	0.2278	0.3939	302.9	-1 506c	21 506
33	569	14	470	73.98	43.24	0.3588	0.2097	0.4314	291.1	-1 520c	24 520
34	573	15	475	72.1	41.17	0.3489	0.1992	0.4517	285.6	-1 528c	25 528 Mm
36	580	16	480	67.95	37.48	0.3362	0.1854	0.4782	279.3	-1 537c	27 537
39	595	17	485	56.63	29.83	0.3052	0.1607	0.5339	267.4	-1 548c	29 548
-1	490c	18	490	26.29	16.73	0.1826	0.1162	0.701	238.5	11 459	33 565 min
-1	495c	19	495	26.33	18.02	0.1795	0.1229	0.6974	237.1	12 462	33 566
-1	500c	20	500	26.35	19.64	0.1764	0.1315	0.692	235.4	12 464	33 567
-1	510c	22	510	26.46	24.07	0.1703	0.155	0.6745	230.7	13 469	33 569
-1	519c	23	520	26.65	26.9	0.1679	0.1695	0.6625	227.7	14 471	34 570 Bm
-1	529c	25	530	27.63	33.74	0.1654	0.202	0.6325	220.7	15 475	34 573
-1	539c	27	540	29.58	41.61	0.1593	0.167	0.2349	0.598	212.8	15 478 35 577
-1	544c	28	545	30.96	45.72	0.1694	0.2502	0.5802	208.8	15 479	35 579
-1	549c	29	550	32.65	49.91	0.173	0.2646	0.5622	204.7	16 480	36 582
-1	554c	30	555	34.63	54.1	0.1777	0.2777	0.5445	200.8	16 481	36 584
-1	560c	32	560	39.47	62.19	0.1899	0.2993	0.5107	193.6	16 483	37 589
W1	380	770	84.19	88.59	96.46	0.3127	0.329	0.3582	0.0		
N1	380	770	2.39	2.51	2.74	0.3127	0.329	0.3582	0.0		

Siehe ähnliche Dateien: <http://farbe.li.tu-berlin.de/AGQ8/AGQ8L0NP.PDF> / .PS  
 Technische Information: <http://farbe.li.tu-berlin.de> oder <http://130.149.60.45/~farbmetrik>

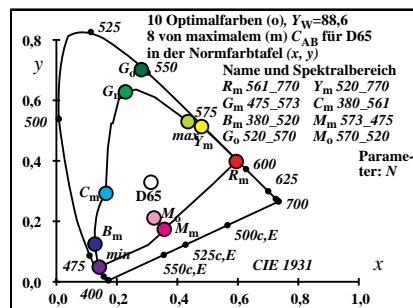

TUB-Registrierung: 20200901-AGQ8/AGQ8L0NP.PDF / .PS TUB-Material: Code=rhakt4  
 Anwendung für Beurteilung und Messung von Display- oder Druck-Ausgabe