
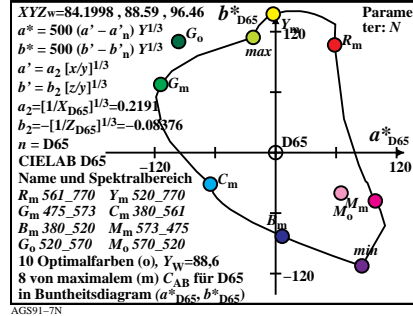
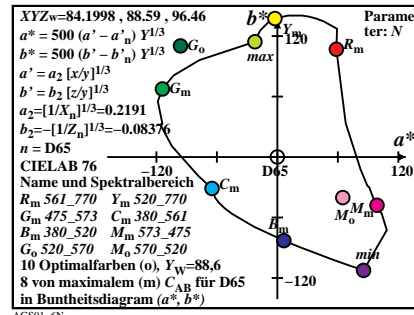
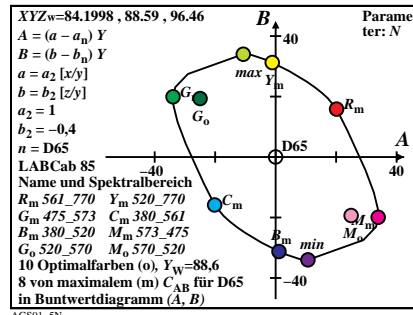
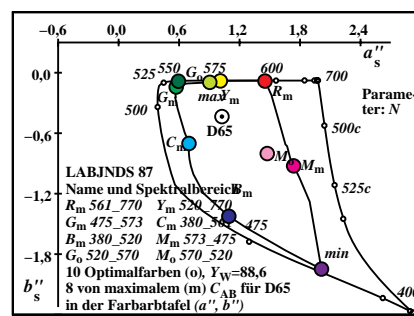
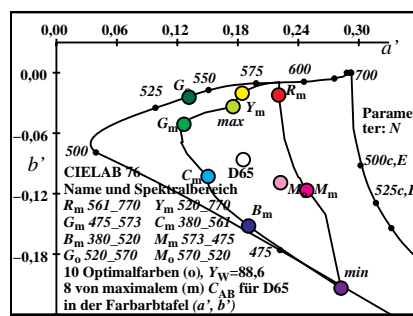
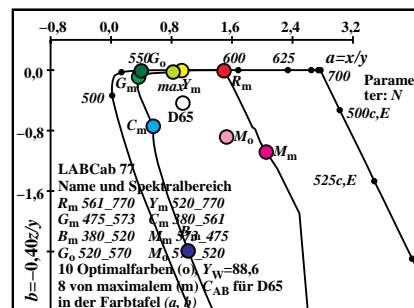


**Ostwald-Optimalfarben (o) von maximalem (m)  $C_{AB}$  für D65,  $Y_N=2.5, Y_W=88.6, Y_m=520.770$**

$i_1, \lambda_1$	$i_2, \lambda_2$	$X_{88.6}$	$Y_{88.6}$	$Z_{88.6}$	$x$	$y$	$z$	$h_{xy}$	$i_d, \lambda_d$	$i_c, \lambda_c$	Code	
0	405	32.561	30.34	52.5	0.1698	0.2938	0.5362	193.8	16.483	37.589	Cm	
6	435	32.562	27.42	53.11	0.1717	0.3326	0.4955	178.5	17.486	42.610		
10	450	32.563	22.23	53.83	0.1794	0.4345	0.3859	141.5	19.496	-1.496c		
12	460	33.565	20.17	54.2	0.1895	0.5094	0.3009	124.2	21.505	-1.505c		
12	465	33.567	21.24	55.55	0.1952	0.5105	0.2942	122.8	21.506	-1.506c		
14	470	33.569	21.05	56.75	0.192	0.5105	0.2942	122.8	21.506	-1.506c		
15	475	34.573	22.93	58.82	0.2356	0.6043	0.1599	105.6	25.528	-1.528c	Gm	
16	480	36.570	27.09	62.51	0.2659	0.6138	0.1202	99.2	27.537	-1.537c		
17	485	39.595	38.4	70.16	0.3243	0.5927	0.0828	87.4	29.548	-1.548c		
18	490	-1.490c	68.75	83.26	0.4296	0.5203	0.05	58.5	33.565	11.459	max	
19	495	-1.495c	68.7	81.97	0.4368	0.5211	0.042	57.1	33.566	12.462		
20	500	-1.500c	68.69	80.35	0.4443	0.5197	0.0358	55.3	33.567	12.464		
22	510	-1.510c	68.58	75.92	0.4614	0.5107	0.0278	50.6	33.569	13.469		
23	520	-1.519c	68.38	73.09	0.4709	0.5033	0.0256	47.7	34.570	14.471	Ym	
25	530	-1.529c	67.41	66.25	0.4924	0.484	0.0235	40.7	34.573	15.475		
27	540	-1.539c	65.45	58.38	0.5162	0.4604	0.0232	32.8	35.577	15.478		
28	545	-1.544c	64.07	54.27	0.5285	0.4476	0.0237	28.7	35.579	15.479		
29	550	-1.549c	62.39	50.08	0.541	0.4343	0.0245	24.7	36.582	16.480		
30	555	-1.554c	60.41	45.89	0.5536	0.4206	0.0257	20.8	36.584	16.481		
32	560	-1.560c	55.56	37.8	0.5779	0.3932	0.0288	13.6	37.589	16.483		
32	561	0	405	64.69	0.5164	0.3791	0.1043	13.8	37.589	16.483	Rm	
32	562	6	435	67.62	0.4687	0.3249	0.2063	358.5	42.610	17.486		
32	563	10	450	72.8	0.4616	0.1043	0.3392	321.6	-1.496c	19.496		
33	565	12	460	74.87	0.4043	0.2564	0.3392	321.6	-1.505c	21.505		
33	567	12	465	73.79	0.379	0.2318	0.3891	304.3	-1.505c	21.505		
33	569	14	470	73.98	0.3782	0.2278	0.3939	302.9	-1.506c	21.506		
33	569	14	470	73.98	0.3588	0.2097	0.4314	291.1	-1.520c	24.520		
34	573	15	475	72.1	0.3489	0.1992	0.4517	285.6	-1.528c	25.528	Mm	
36	580	16	480	67.95	0.3362	0.1854	0.4782	279.3	-1.537c	27.537		
39	595	17	485	56.63	0.3052	0.1607	0.5339	267.4	-1.548c	29.548		
-1	490c	18	490	26.29	0.1826	0.1162	0.701	238.5	11.459	33.565	min	
-1	495c	19	495	26.33	0.1795	0.1229	0.6974	237.1	12.462	33.566		
-1	500c	20	500	26.35	0.1764	0.1315	0.692	235.4	12.464	33.567		
-1	510c	22	510	26.46	0.1703	0.155	0.6745	230.7	13.469	33.569		
-1	519c	23	520	26.65	0.1679	0.1695	0.6625	227.7	14.471	34.570	Bm	
-1	529c	25	530	26.63	0.1654	0.202	0.6325	220.7	15.475	34.573		
-1	539c	27	540	29.58	0.10593	0.167	0.2349	0.598	212.8	15.478	35.577	
-1	544c	28	545	30.96	0.1694	0.2502	0.5802	208.8	15.479	35.579		
-1	549c	29	550	32.65	0.173	0.2646	0.5622	204.7	16.480	36.582		
-1	554c	30	555	34.63	0.1777	0.2777	0.5445	200.8	16.481	36.584		
-1	560c	32	560	39.47	0.1899	0.2993	0.5107	193.6	16.483	37.589		
W1	380	770	84.19	88.59	0.3127	0.329	0.3582	0.0				
N1	380	770	2.39	2.51	0.3127	0.329	0.3582	0.0				

Siehe ähnliche Dateien: <http://farbe.li.tu-berlin.de/AGS9/AGS9L0NP.PDF> / .PS  
 Technische Information: <http://farbe.li.tu-berlin.de> oder <http://130.149.60.45/~farbmetrik>

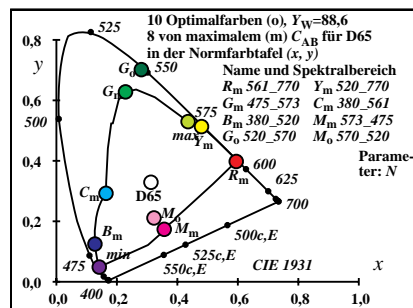

TUB-Registrierung: 20201101-AGS9/AGS9L0NP.PDF / .PS  
 Anwendung für Beurteilung und Messung von Display- oder Druck-Ausgabe  
 TUB-Material: Code=rhakt4