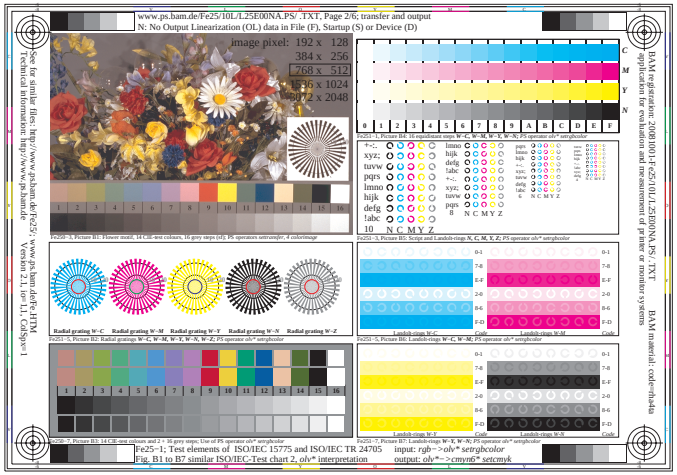
www.ps.bam.de/Fe25/10L/L25E00NA.PS/ .TXT, Page 2/6; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)
image pixel: 192 x 128
384 x 256
768 x 512
1536 x 1024
3072 x 2048
Fe25−1, Picture B4: 16 equidistant steps W−C, W−M, W−Y, W−N; PS operator ol*v* setrgbcolor
Fe25−2, Picture B4C: 16 equidistant steps N−C, N−M, N−Y, N−W; PS operator ol*v* setrgbcolor
Fe25−3, Picture B5: Script and Landolt-rings N, C, M, Y, Z; PS operator ol*v* setrgbcolor
Fe25−5, Picture B6: Landolt-rings W−C, W−M; PS operator ol*v* setrgbcolor
Fe25−5, Picture B6C: Landolt-rings N−C, N−M; PS operator ol*v* setrgbcolor
Fe25−7, Picture B7: Landolt-rings W−C, W−M; PS operator ol*v* setrgbcolor
Fe25−7, Picture B70: Landolt-rings N−C, N−M; PS operator ol*v* setrgbcolor
Fe25−7, Picture B8: 14 CIE-test colours and 2 + 16 grey steps; Use of PS operator ol*v* setrgbcolor
Fe25−1; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. B1 to B7 similar ISO/IEC-Test chart 2, olv* interpretation
input: rgb−>olv* setrgbcolor
output: olv*−>cmyn6* setcmyk
Technical information: http://www.ps.bam.de
Version 2.2, ie= 1.1, ColSpc=1
BAM-registration: 20081003-Fe25/10L/L25E00NA.PS/ .TXT
application for evaluation and measurement of printer or monitor systems
BAM-material: code=rbu4du

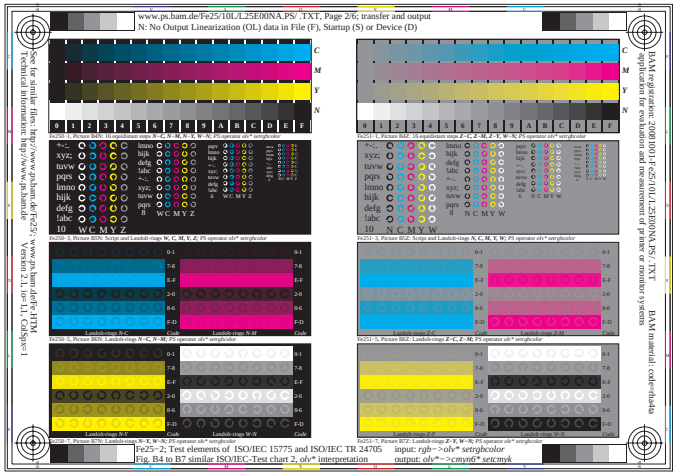
www.ps.bam.de/Fe25/10L/L25E00NA.PS/ .TXT, Page 2/6; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)
Fe25−1, Picture B4: 16 equidistant steps W−C, W−M, W−Y, W−N; PS operator ol*v* setrgbcolor
Fe25−1, Picture B4Z: 16 equidistant steps Z−C, Z−M, Z−Y, W−N; PS operator ol*v* setrgbcolor
Fe25−3, Picture B5N: Script and Landolt-rings W, C, M, Y, Z; PS operator ol*v* setrgbcolor
Fe25−3, Picture B5Z: Script and Landolt-rings N, C, M, Y, W; PS operator ol*v* setrgbcolor
Fe25−5, Picture B6N: Landolt-rings W−C, W−M; PS operator ol*v* setrgbcolor
Fe25−5, Picture B6Z: Landolt-rings Z−C, Z−M; PS operator ol*v* setrgbcolor
Fe25−7, Picture B70: Landolt-rings N−C, N−M; PS operator ol*v* setrgbcolor
Fe25−7, Picture B72: Landolt-rings Z−C, W−M; PS operator ol*v* setrgbcolor
Fe25−2; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. B4 to B7 similar ISO/IEC-Test chart 2, olv* interpretation
input: rgb−>olv* setrgbcolor
output: olv*−>cmyn6* setcmyk
Technical information: http://www.ps.bam.de
Version 2.2, ie= 1.1, ColSpc=1
BAM-registration: 20081003-Fe25/10L/L25E00NA.PS/ .TXT
application for evaluation and measurement of printer or monitor systems
BAM-material: code=rbu4du

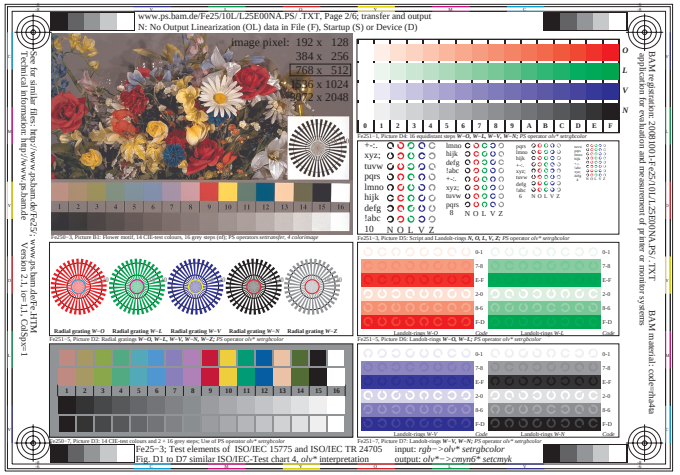
www.ps.bam.de/Fe25/10L/L25E00NA.PS/ .TXT, Page 2/6; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)
image pixel: 192 x 128
384 x 256
768 x 512
1536 x 1024
3072 x 2048
Fe25−1, Picture B4: 16 equidistant steps W−C, W−M, W−Y, W−N; PS operator ol*v* setrgbcolor
Fe25−2, Picture B4C: 16 equidistant steps N−C, N−M, N−Y, N−W; PS operator ol*v* setrgbcolor
Fe25−3, Picture B5: Script and Landolt-rings N, O, L, V, Z; PS operator ol*v* setrgbcolor
Fe25−5, Picture B6: Landolt-rings W−O, W−L, W−V, W−N; PS operator ol*v* setrgbcolor
Fe25−5, Picture B6C: Landolt-rings N−O, N−L, N−V, W−N; PS operator ol*v* setrgbcolor
Fe25−7, Picture B7: Landolt-rings W−O, W−L, W−V, W−N; PS operator ol*v* setrgbcolor
Fe25−7, Picture B70: Landolt-rings N−O, N−L, N−V, W−N; PS operator ol*v* setrgbcolor
Fe25−7, Picture B8: 14 CIE-test colours and 2 + 16 grey steps; Use of PS operator ol*v* setrgbcolor
Fe25−3; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. D1 to D7 similar ISO/IEC-Test chart 4, olv* interpretation
input: rgb−>olv* setrgbcolor
output: olv*−>cmyn6* setcmyk
Technical information: http://www.ps.bam.de
Version 2.2, ie= 1.1, ColSpc=1
BAM-registration: 20081003-Fe25/10L/L25E00NA.PS/ .TXT
application for evaluation and measurement of printer or monitor systems
BAM-material: code=rbu4du

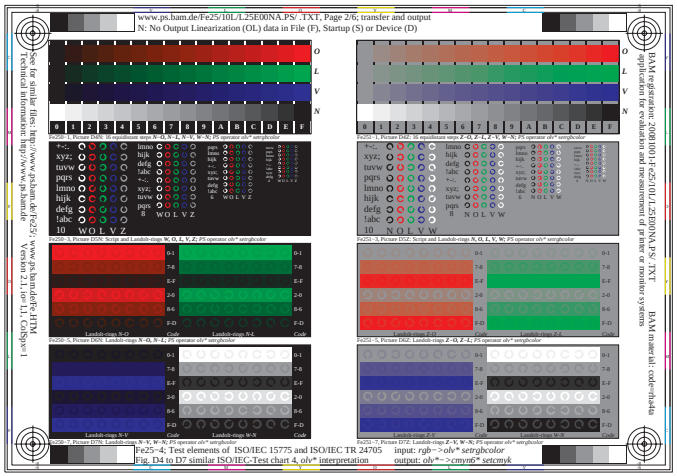
www.ps.bam.de/Fe25/10L/L25E00NA.PS/ .TXT, Page 2/6; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)
Fe25−1, Picture D4N: 16 equidistant steps W−O, W−L, W−V, W−N; PS operator ol*v* setrgbcolor
Fe25−1, Picture D4Z: 16 equidistant steps Z−O, Z−L, Z−V, W−N; PS operator ol*v* setrgbcolor
Fe25−3, Picture D5N: Script and Landolt-rings W, O, L, V, Z; PS operator ol*v* setrgbcolor
Fe25−3, Picture D5Z: Script and Landolt-rings N, O, L, V, W; PS operator ol*v* setrgbcolor
Fe25−5, Picture D6N: Landolt-rings W−O, W−L; PS operator ol*v* setrgbcolor
Fe25−5, Picture D6Z: Landolt-rings Z−O, Z−L; PS operator ol*v* setrgbcolor
Fe25−7, Picture D70: Landolt-rings N−O, N−L; PS operator ol*v* setrgbcolor
Fe25−7, Picture D72: Landolt-rings Z−O, Z−L; PS operator ol*v* setrgbcolor
Fe25−4; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. D4 to D7 similar ISO/IEC-Test chart 4, olv* interpretation
input: rgb−>olv* setrgbcolor
output: olv*−>cmyn6* setcmyk
Technical information: http://www.ps.bam.de
Version 2.2, ie= 1.1, ColSpc=1
BAM-registration: 20081003-Fe25/10L/L25E00NA.PS/ .TXT
application for evaluation and measurement of printer or monitor systems
BAM-material: code=rbu4du

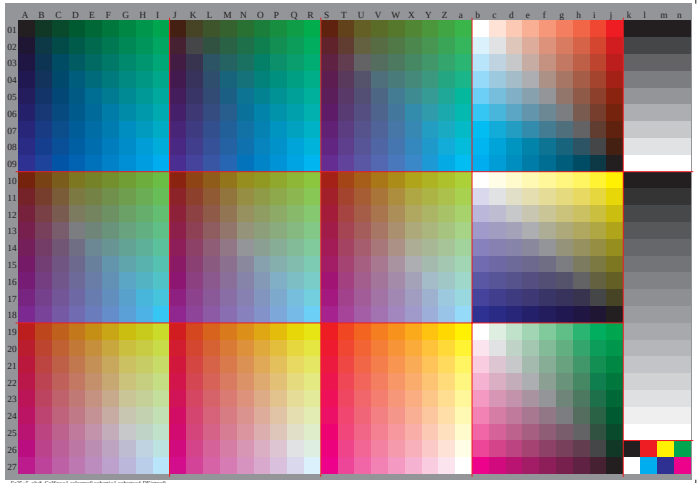
Fe25−5, olv*, ColSpc=1 colorm=0 xchan=1 xcharn=4 DEmp=0

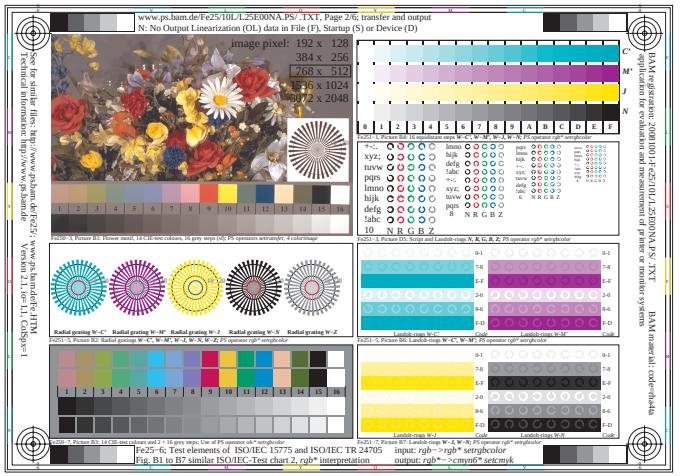
www.ps.bam.de/Fe25/10L/L25E00NA.PS/ .TXT, Page 2/6; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)
image pixel: 192 x 128
384 x 256
768 x 512
1536 x 1024
3072 x 2048
Fe25−1, Picture B4: 16 equidistant steps W−C, W−M, W−J, W−N; PS operator rgb*v* setrgbcolor
Fe25−2, Picture B4C: 16 equidistant steps N−C, N−M, N−J, W−N; PS operator rgb*v* setrgbcolor
Fe25−3, Picture B5: Script and Landolt-rings N, R, G, B, Z; PS operator rgb*v* setrgbcolor
Fe25−5, Picture B6: Landolt-rings W−C, W−M; PS operator rgb*v* setrgbcolor
Fe25−5, Picture B6C: Landolt-rings N−C, N−M; PS operator rgb*v* setrgbcolor
Fe25−7, Picture B7: Landolt-rings W−C, W−M; PS operator rgb*v* setrgbcolor
Fe25−7, Picture B70: Landolt-rings N−C, N−M; PS operator rgb*v* setrgbcolor
Fe25−7, Picture B8: 14 CIE-test colours and 2 + 16 grey steps; Use of PS operator rgb*v* setrgbcolor
Fe25−6; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. B1 to B7 similar ISO/IEC-Test chart 2, rgb* interpretation
input: rgb−>rgb* setrgbcolor
output: rgb*−>cmyn6* setcmyk
Technical information: http://www.ps.bam.de
Version 2.2, ie= 1.1, ColSpc=1
BAM-registration: 20081003-Fe25/10L/L25E00NA.PS/ .TXT
application for evaluation and measurement of printer or monitor systems
BAM-material: code=rbu4du

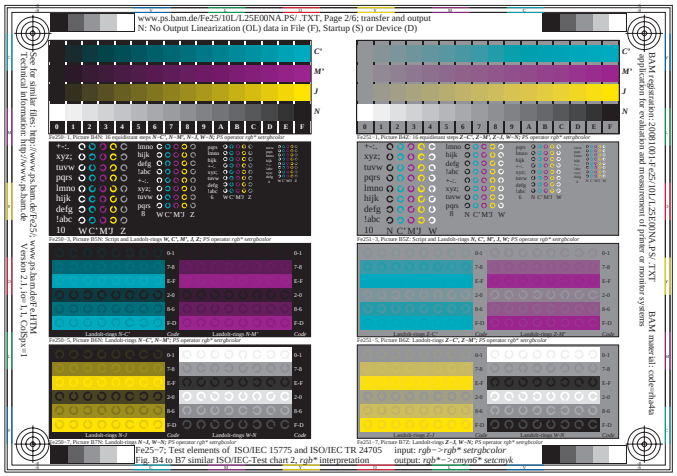
www.ps.bam.de/Fe25/10L/L25E00NA.PS/ .TXT, Page 2/6; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)
Fe25−1, Picture B4N: 16 equidistant steps W−C, W−M, W−J, W−N; PS operator rgb*v* setrgbcolor
Fe25−1, Picture B4Z: 16 equidistant steps Z−C, Z−M, Z−J, W−N; PS operator rgb*v* setrgbcolor
Fe25−3, Picture B5N: Script and Landolt-rings W, C, M', J, Z; PS operator rgb*v* setrgbcolor
Fe25−3, Picture B5Z: Script and Landolt-rings N, C, M', J, W; PS operator rgb*v* setrgbcolor
Fe25−5, Picture B6N: Landolt-rings W−C, W−M'; PS operator rgb*v* setrgbcolor
Fe25−5, Picture B6Z: Landolt-rings Z−C', Z−M'; PS operator rgb*v* setrgbcolor
Fe25−7, Picture B70: Landolt-rings N−C, N−M'; PS operator rgb*v* setrgbcolor
Fe25−7, Picture B72: Landolt-rings Z−C', Z−M'; PS operator rgb*v* setrgbcolor
Fe25−7; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. B4 to B7 similar ISO/IEC-Test chart 2, rgb* interpretation
input: rgb−>rgb* setrgbcolor
output: rgb*−>cmyn6* setcmyk
Technical information: http://www.ps.bam.de
Version 2.2, ie= 1.1, ColSpc=1
BAM-registration: 20081003-Fe25/10L/L25E00NA.PS/ .TXT
application for evaluation and measurement of printer or monitor systems
BAM-material: code=rbu4du

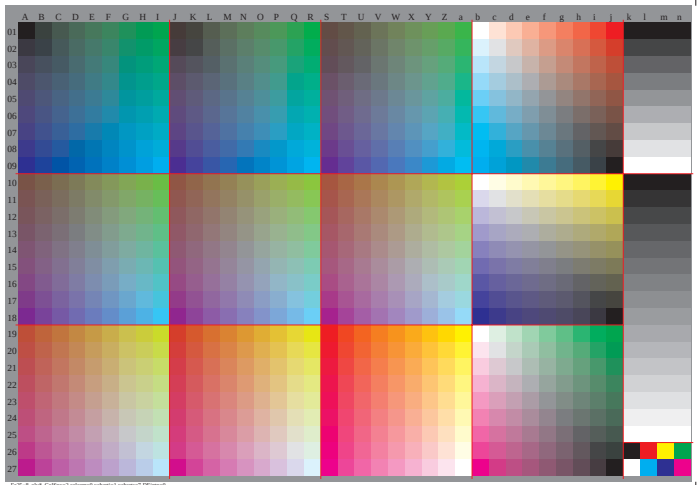
Fe25−8, olv*, ColSpc=2 colorm=0 xchan=1 xcharn=7 DEmp=0

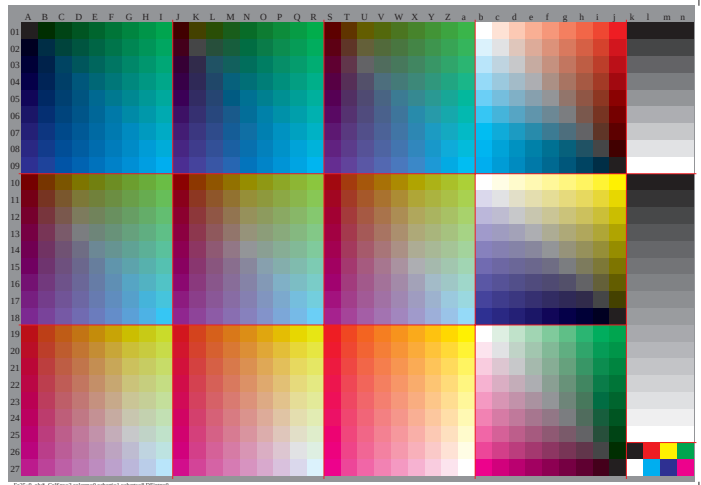
Fe25−9, olv*, ColSpc=3 colorm=0 xchan=1 xcharn=8 DEmp=0