www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for samples files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1.0+1.1.1, CoSSpc=1

BAM registration: 2008/10P1 / Fe38/10Y/Y10100NP.PS./PDF; application for evaluation and measurement of printer or monitor systems

BAM material: code=fbe4a

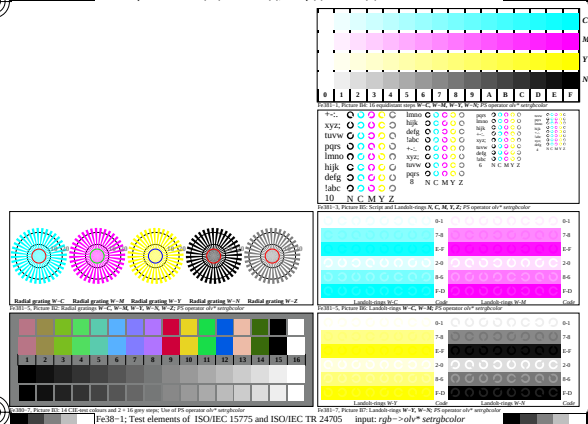

Fe38−1; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705 input: *rgb−>olv* setrgbcolor*
Fig. B1 to B7 similar ISO/IEC,-Test chart 2, *olv** interpretation output: no change compared to input

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for samples files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1.0+1.1.1, CoSSpc=1

BAM registration: 2008/10P1 / Fe38/10Y/Y10100NP.PS./PDF; application for evaluation and measurement of printer or monitor systems

BAM material: code=fbe4a

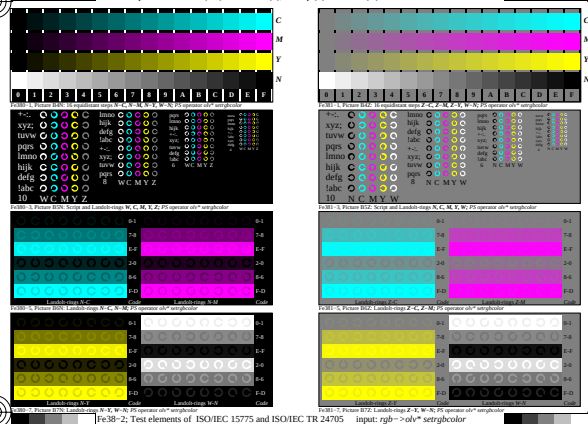

Fe38−2; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705 input: *rgb−>olv* setrgbcolor*
Fig. B4 to B7 similar ISO/IEC,-Test chart 2, *olv** interpretation output: no change compared to input

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for samples files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1.0+1.1.1, CoSSpc=1

BAM registration: 2008/10P1 / Fe38/10Y/Y10100NP.PS./PDF; application for evaluation and measurement of printer or monitor systems

BAM material: code=fbe4a

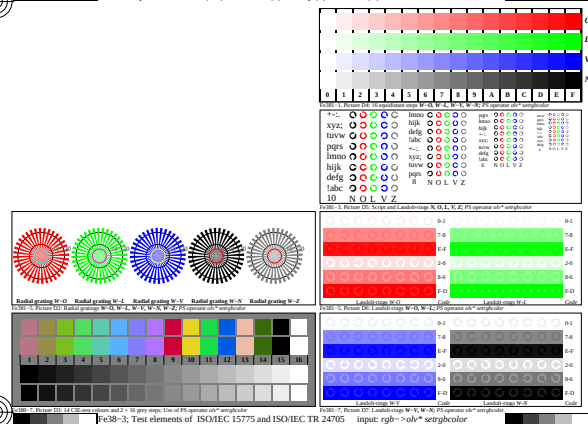

Fe38−3; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705 input: *rgb−>olv* setrgbcolor*
Fig. D1 to D7 similar ISO/IEC,-Test chart 4, *olv** interpretation output: no change compared to input

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for samples files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1.0+1.1.1, CoSSpc=1

BAM registration: 2008/10P1 / Fe38/10Y/Y10100NP.PS./PDF; application for evaluation and measurement of printer or monitor systems

BAM material: code=fbe4a

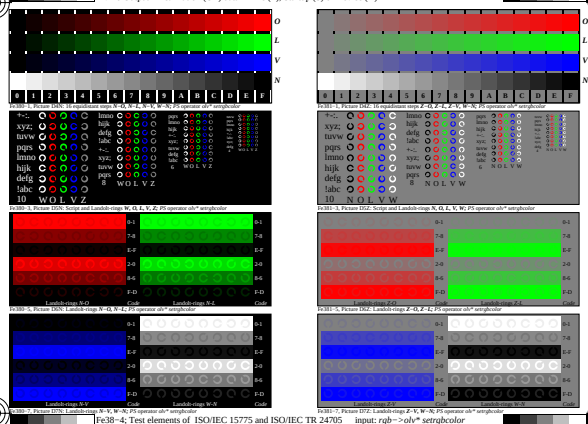

Fe38−4; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705 input: *rgb−>olv* setrgbcolor*
Fig. D4 to D7 similar ISO/IEC,-Test chart 4, *olv** interpretation output: no change compared to input

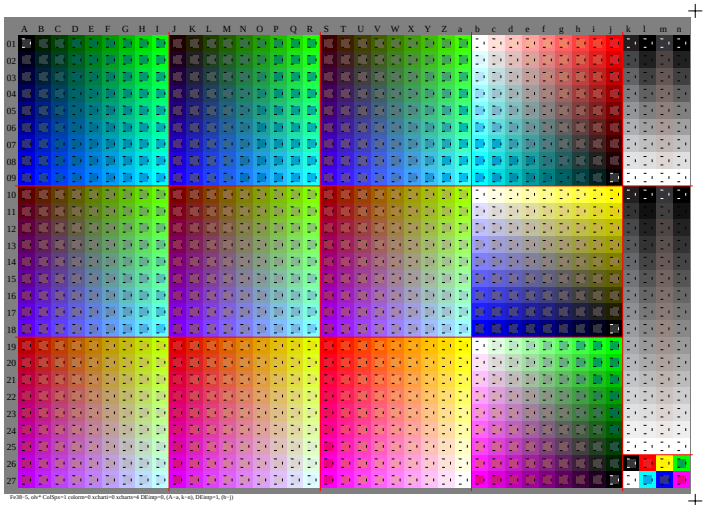

Fe38−5, olv* CoSSpc=1 colorset=0 xchart=0 xcharts=4 DEtmp=0, (A − a, k − n), DEtmp=1, (b − j)

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for samples files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1.0+1.1.1, CoSSpc=1

BAM registration: 2008/10P1 / Fe38/10Y/Y10100NP.PS./PDF; application for evaluation and measurement of printer or monitor systems

BAM material: code=fbe4a

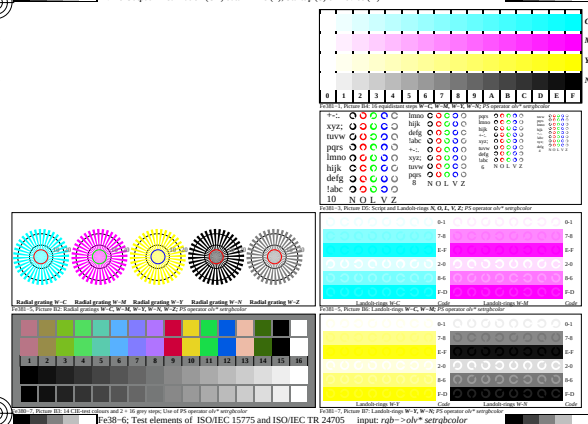

Fe38−6; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705 input: *rgb−>olv* setrgbcolor*
Fig. B1 to B7 similar ISO/IEC,-Test chart 2, *olv** interpretation output: no change compared to input

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for samples files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1.0+1.1.1, CoSSpc=1

BAM registration: 2008/10P1 / Fe38/10Y/Y10100NP.PS./PDF; application for evaluation and measurement of printer or monitor systems

BAM material: code=fbe4a

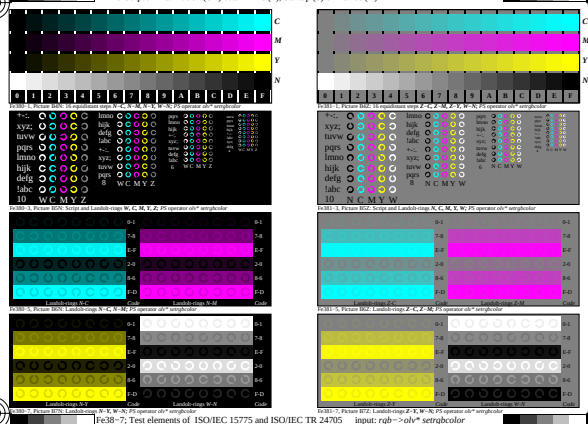

Fe38−7; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705 input: *rgb−>olv* setrgbcolor*
Fig. B4 to B7 similar ISO/IEC,-Test chart 2, *olv** interpretation output: no change compared to input

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for samples files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1.0+1.1.1, CoSSpc=1

BAM registration: 2008/10P1 / Fe38/10Y/Y10100NP.PS./PDF; application for evaluation and measurement of printer or monitor systems

BAM material: code=fbe4a

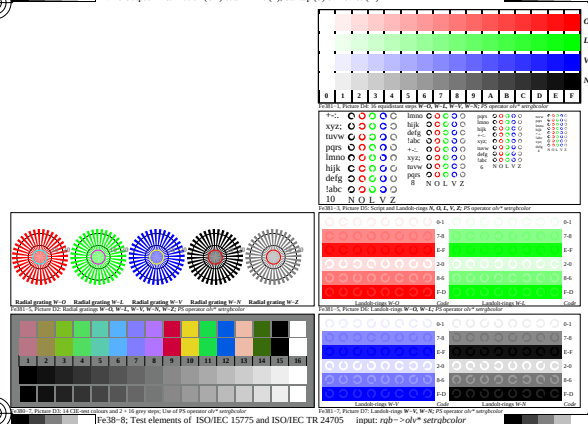

Fe38−8; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705 input: *rgb−>olv* setrgbcolor*
Fig. D1 to D7 similar ISO/IEC,-Test chart 4, *olv** interpretation output: no change compared to input

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for samples files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1.0+1.1.1, CoSSpc=1

BAM registration: 2008/10P1 / Fe38/10Y/Y10100NP.PS./PDF; application for evaluation and measurement of printer or monitor systems

BAM material: code=fbe4a

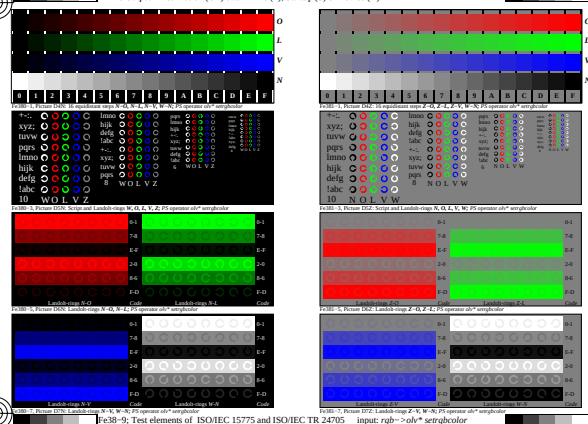

Fe38−9; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705 input: *rgb−>olv* setrgbcolor*
Fig. D4 to D7 similar ISO/IEC,-Test chart 4, *olv** interpretation output: no change compared to input

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for sample files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1 or 1.1, CutSpc=1

BAM registration: 2008/10/F1-Fe38/10Y/Y10100NP.PS./PDF BAM material: code=Ba4a application for evaluation and measurement of printer or monitor systems

Fe38-1, Picture B1: 16 equidistant steps W-C, W-M, W-Y, W-N; PS operator ob* setrgbcolor

Fe38-1, Picture B2: Radial gratings W-C, W-M, W-Y, W-N, W-Z; PS operator ob* setrgbcolor

Fe38-1, Picture B3: Script and Landolt-rings W, C, M, Y, Z; PS operator ob* setrgbcolor

Fe38-1, Picture B4: Landolt-rings W-C, W-M; PS operator ob* setrgbcolor

Fe38-1, Picture B5N: Landolt-rings W-C, W-M; PS operator ob* setrgbcolor

Fe38-1, Picture B5Z: Landolt-rings Z-C, Z-M; PS operator ob* setrgbcolor

Fe38-2, Picture B6: 14 CIE-test colours and 2 × 16 grey steps; Use of PS operator ob* setrgbcolor

Fe38-2, Picture B7N: Landolt-rings W-Y, W-N; PS operator ob* setrgbcolor

Fe38-2, Picture B7Z: Landolt-rings Z-Y, W-N; PS operator ob* setrgbcolor

Fe38–1; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. B1 to B7 similar ISO/IEC,-Test chart 2, *olv** interpretation

input: *rgb*->olv** setrgbcolor
output: *olv*->cmyn6** setcmyk

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for sample files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1 or 1.1, CutSpc=1

BAM registration: 2008/10/F1-Fe38/10Y/Y10100NP.PS./PDF BAM material: code=Ba4a application for evaluation and measurement of printer or monitor systems

Fe38-1, Picture D1: 16 equidistant steps W-O, W-L, W-V, W-N; PS operator ob* setrgbcolor

Fe38-1, Picture D2: Radial gratings W-O, W-L, W-V, W-N, W-Z; PS operator ob* setrgbcolor

Fe38-1, Picture D3: Script and Landolt-rings O, L, V, Z; PS operator ob* setrgbcolor

Fe38-1, Picture D4: Landolt-rings W-O, W-L; PS operator ob* setrgbcolor

Fe38-1, Picture D5N: Landolt-rings W-O, W-L; PS operator ob* setrgbcolor

Fe38-1, Picture D5Z: Landolt-rings Z-O, Z-L; PS operator ob* setrgbcolor

Fe38-2, Picture D6: 14 CIE-test colours and 2 × 16 grey steps; Use of PS operator ob* setrgbcolor

Fe38-2, Picture D7N: Landolt-rings W-V, W-N; PS operator ob* setrgbcolor

Fe38-2, Picture D7Z: Landolt-rings Z-V, W-N; PS operator ob* setrgbcolor

Fe38–3; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. D1 to D7 similar ISO/IEC,-Test chart 4, *olv** interpretation

input: *rgb*->olv** setrgbcolor
output: *olv*->cmyn6** setcmyk

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for sample files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1 or 1.1, CutSpc=1

BAM registration: 2008/10/F1-Fe38/10Y/Y10100NP.PS./PDF BAM material: code=Ba4a application for evaluation and measurement of printer or monitor systems

Fe38-1, Picture D6: 16 equidistant steps W-O, W-L, W-V, W-N; PS operator ob* setrgbcolor

Fe38-1, Picture D7N: Landolt-rings W-O, W-L, W-V, W-N; PS operator ob* setrgbcolor

Fe38-1, Picture D7Z: Landolt-rings Z-O, Z-L, Z-V, W-N; PS operator ob* setrgbcolor

Fe38-2, Picture D8: 14 CIE-test colours and 2 × 16 grey steps; Use of PS operator ob* setrgbcolor

Fe38-2, Picture D9N: Landolt-rings W-V, W-N; PS operator ob* setrgbcolor

Fe38-2, Picture D9Z: Landolt-rings Z-V, W-N; PS operator ob* setrgbcolor

Fe38–4; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. D4 to D7 similar ISO/IEC,-Test chart 4, *olv** interpretation

input: *rgb*->olv** setrgbcolor
output: *olv*->cmyn6** setcmyk

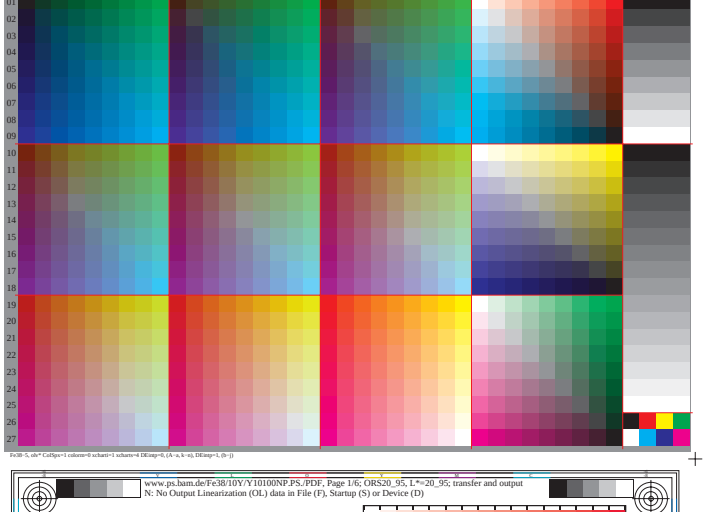

Fe38–5, *ob** CutSpc=1 colorow=0 xchart=1 xcharts=4 DEimp=0, (A = a, k = n), DEimp=1, (b = j)

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for sample files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1 or 1.1, CutSpc=1

BAM registration: 2008/10/F1-Fe38/10Y/Y10100NP.PS./PDF BAM material: code=Ba4a application for evaluation and measurement of printer or monitor systems

Fe38-1, Picture B1: 16 equidistant steps W-C, W-M', W-J', W-N; PS operator rgb* setrgbcolor

Fe38-1, Picture B2: Radial gratings W-C, W-M', W-J', W-N, W-Z; PS operator rgb* setrgbcolor

Fe38-1, Picture B3: Script and Landolt-rings W, C', M', J', Z; PS operator rgb* setrgbcolor

Fe38-1, Picture B4: Landolt-rings W-C', W-M'; PS operator rgb* setrgbcolor

Fe38-1, Picture B5N: Landolt-rings W-C', W-M'; PS operator rgb* setrgbcolor

Fe38-1, Picture B5Z: Landolt-rings Z-C', Z-M'; PS operator rgb* setrgbcolor

Fe38-2, Picture B6: 14 CIE-test colours and 2 × 16 grey steps; Use of PS operator rgb* setrgbcolor

Fe38-2, Picture B7N: Landolt-rings W-J', W-N; PS operator rgb* setrgbcolor

Fe38-2, Picture B7Z: Landolt-rings Z-J', W-N; PS operator rgb* setrgbcolor

Fe38–6; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. B1 to B7 similar ISO/IEC,-Test chart 2, *rgb** interpretation

input: *rgb*->rgb* setrgbcolor
output: *rgb*->cmyn6** setcmyk

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for sample files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1 or 1.1, CutSpc=1

BAM registration: 2008/10/F1-Fe38/10Y/Y10100NP.PS./PDF BAM material: code=Ba4a application for evaluation and measurement of printer or monitor systems

Fe38-1, Picture D1: 16 equidistant steps W-C', W-M', W-J', W-N; PS operator rgb* setrgbcolor

Fe38-1, Picture D2: Radial gratings W-C', W-M', W-J', W-N, W-Z; PS operator rgb* setrgbcolor

Fe38-1, Picture D3: Script and Landolt-rings W, C', M', J', Z; PS operator rgb* setrgbcolor

Fe38-1, Picture D4: Landolt-rings W-C', W-M'; PS operator rgb* setrgbcolor

Fe38-1, Picture D5N: Landolt-rings W-C', W-M'; PS operator rgb* setrgbcolor

Fe38-1, Picture D5Z: Landolt-rings Z-C', Z-M'; PS operator rgb* setrgbcolor

Fe38-2, Picture D6: 14 CIE-test colours and 2 × 16 grey steps; Use of PS operator rgb* setrgbcolor

Fe38-2, Picture D7N: Landolt-rings W-J', W-N; PS operator rgb* setrgbcolor

Fe38-2, Picture D7Z: Landolt-rings Z-J', W-N; PS operator rgb* setrgbcolor

Fe38–7; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. B4 to B7 similar ISO/IEC,-Test chart 2, *rgb** interpretation

input: *rgb*->rgb* setrgbcolor
output: *rgb*->cmyn6** setcmyk

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for sample files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1 or 1.1, CutSpc=1

BAM registration: 2008/10/F1-Fe38/10Y/Y10100NP.PS./PDF BAM material: code=Ba4a application for evaluation and measurement of printer or monitor systems

Fe38-1, Picture D5: 16 equidistant steps W-R, W-G, W-B, W-N; PS operator rgb* setrgbcolor

Fe38-1, Picture D6: Radial gratings W-R, W-G, W-B, W-N, W-Z; PS operator rgb* setrgbcolor

Fe38-1, Picture D7: Script and Landolt-rings W, R, G, B, Z; PS operator rgb* setrgbcolor

Fe38-1, Picture D8: Landolt-rings W-R, W-G; PS operator rgb* setrgbcolor

Fe38-1, Picture D9N: Landolt-rings W-R, W-G; PS operator rgb* setrgbcolor

Fe38-1, Picture D9Z: Landolt-rings Z-R, Z-G; PS operator rgb* setrgbcolor

Fe38-2, Picture D10: 14 CIE-test colours and 2 × 16 grey steps; Use of PS operator rgb* setrgbcolor

Fe38-2, Picture D11N: Landolt-rings W-B, W-N; PS operator rgb* setrgbcolor

Fe38-2, Picture D11Z: Landolt-rings Z-B, W-N; PS operator rgb* setrgbcolor

Fe38–8; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. D1 to D7 similar ISO/IEC,-Test chart 4, *rgb** interpretation

input: *rgb*->rgb* setrgbcolor
output: *rgb*->cmyn6** setcmyk

www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

See for sample files: http://www.ps.bam.de/Fe38/ Technical information http://www.ps.bam.de/

Version 2.1 or 1.1, CutSpc=1

BAM registration: 2008/10/F1-Fe38/10Y/Y10100NP.PS./PDF BAM material: code=Ba4a application for evaluation and measurement of printer or monitor systems

Fe38-1, Picture D8: 16 equidistant steps W-R, W-G, W-B, W-N; PS operator rgb* setrgbcolor

Fe38-1, Picture D9N: Landolt-rings W-R, W-G, W-B, W-N; PS operator rgb* setrgbcolor

Fe38-1, Picture D9Z: Landolt-rings Z-R, Z-G, Z-B, W-N; PS operator rgb* setrgbcolor

Fe38-2, Picture D10: 14 CIE-test colours and 2 × 16 grey steps; Use of PS operator rgb* setrgbcolor

Fe38-2, Picture D11N: Landolt-rings W-B, W-N; PS operator rgb* setrgbcolor

Fe38-2, Picture D11Z: Landolt-rings Z-B, W-N; PS operator rgb* setrgbcolor

Fe38–9; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. D4 to D7 similar ISO/IEC,-Test chart 4, *rgb** interpretation

input: *rgb*->rgb* setrgbcolor
output: *rgb*->cmyn6** setcmyk

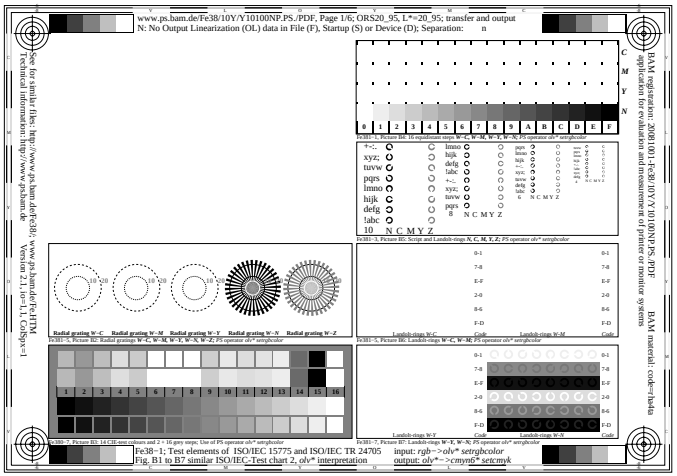
www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D); Separation: n
See for samples files: http://www.ps.bam.de/Fe38/ Technical information: http://www.ps.bam.de/
BAM magnification: 200B10P1 / Fe38/10Y/Y10100NP.PS./PDF
application for evaluation and measurement of printer or monitor systems
BAM material: code=Baka
Version 2.1, n=1, L1, CoSpc=1
Fe38~1; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. B1 to B7 similar ISO/IEC,-Test chart 2, olv* interpretation
input: rgb~>olv* setrgbcolor
output: olv*~>cmyn6* setcmyk

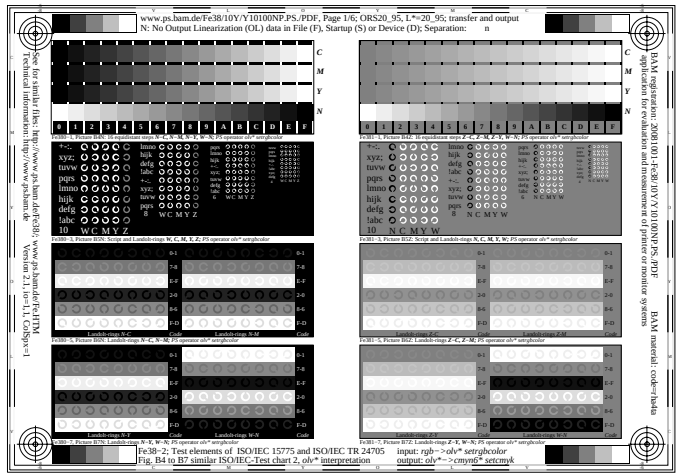
www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D); Separation: n
See for samples files: http://www.ps.bam.de/Fe38/ Technical information: http://www.ps.bam.de/
BAM magnification: 200B10P1 / Fe38/10Y/Y10100NP.PS./PDF
application for evaluation and measurement of printer or monitor systems
BAM material: code=Baka
Version 2.1, n=1, L1, CoSpc=1
Fe38~2; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. B4 to B7 similar ISO/IEC,-Test chart 2, olv* interpretation
input: rgb~>olv* setrgbcolor
output: olv*~>cmyn6* setcmyk

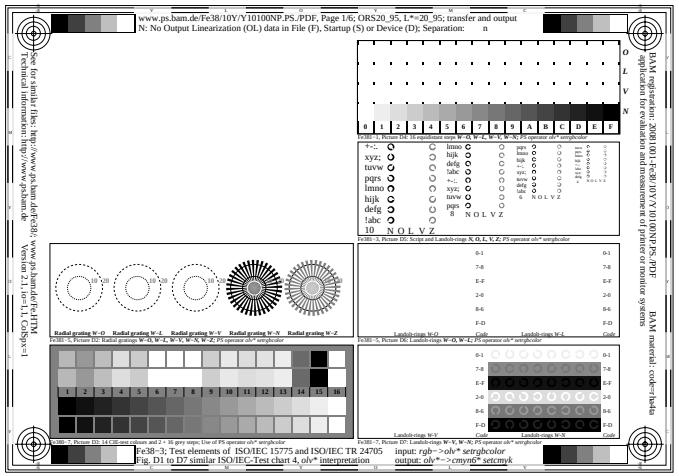
www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D); Separation: n
See for samples files: http://www.ps.bam.de/Fe38/ Technical information: http://www.ps.bam.de/
BAM magnification: 200B10P1 / Fe38/10Y/Y10100NP.PS./PDF
application for evaluation and measurement of printer or monitor systems
BAM material: code=Baka
Version 2.1, n=1, L1, CoSpc=1
Fe38~3; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. D1 to D7 similar ISO/IEC,-Test chart 4, olv* interpretation
input: rgb~>olv* setrgbcolor
output: olv*~>cmyn6* setcmyk

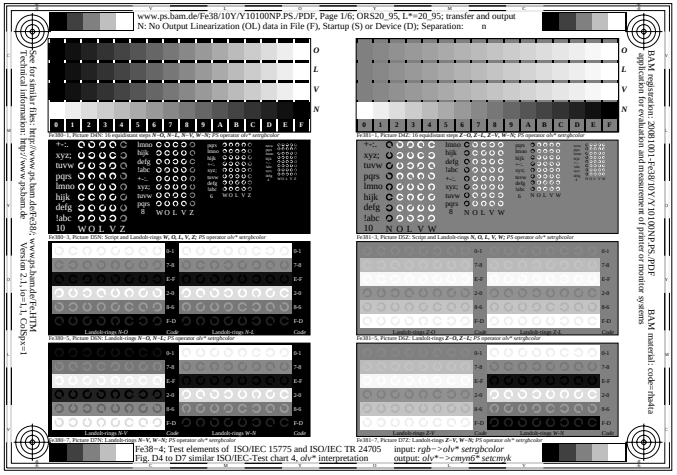
www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D); Separation: n
See for samples files: http://www.ps.bam.de/Fe38/ Technical information: http://www.ps.bam.de/
BAM magnification: 200B10P1 / Fe38/10Y/Y10100NP.PS./PDF
application for evaluation and measurement of printer or monitor systems
BAM material: code=Baka
Version 2.1, n=1, L1, CoSpc=1
Fe38~4; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. D4 to D7 similar ISO/IEC,-Test chart 4, olv* interpretation
input: rgb~>olv* setrgbcolor
output: olv*~>cmyn6* setcmyk

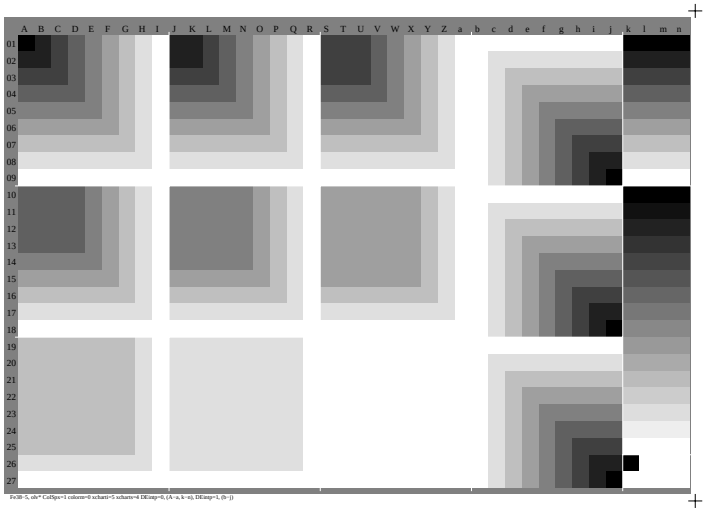
Fe38~5, olv* CoSpc=1 colorsw=0 xchart=5 xcharts=4 DEtmp=0, (A = a, k = n), DEtmp=1, (b = j)

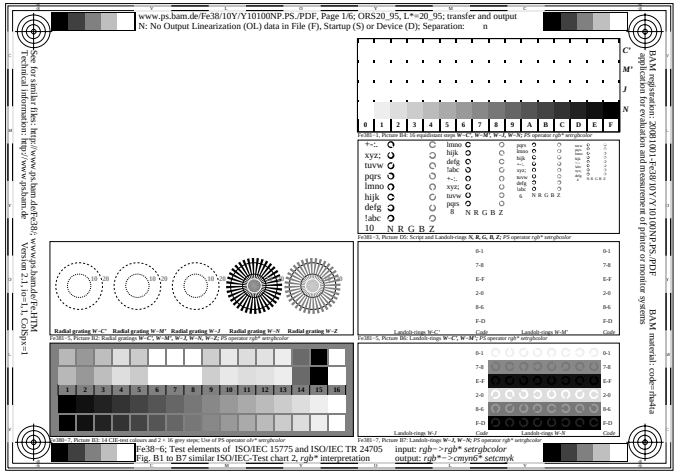
www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D); Separation: n
See for samples files: http://www.ps.bam.de/Fe38/ Technical information: http://www.ps.bam.de/
BAM magnification: 200B10P1 / Fe38/10Y/Y10100NP.PS./PDF
application for evaluation and measurement of printer or monitor systems
BAM material: code=Baka
Version 2.1, n=1, L1, CoSpc=1
Fe38~6; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. B1 to B7 similar ISO/IEC,-Test chart 2, rgb* interpretation
input: rgb~>rgb* setrgbcolor
output: rgb*~>cmyn6* setcmyk

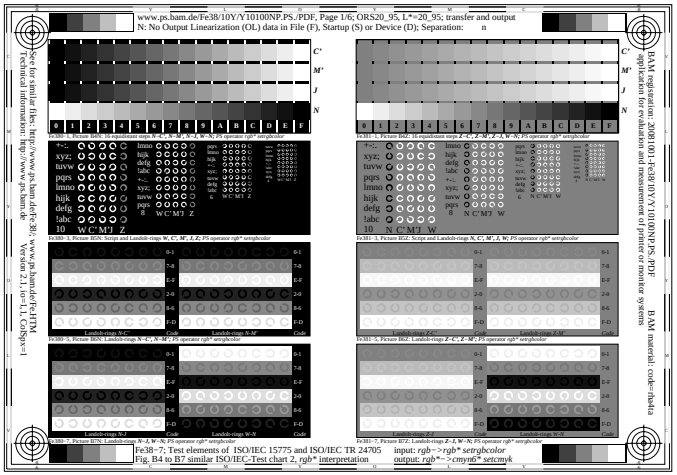
www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D); Separation: n
See for samples files: http://www.ps.bam.de/Fe38/ Technical information: http://www.ps.bam.de/
BAM magnification: 200B10P1 / Fe38/10Y/Y10100NP.PS./PDF
application for evaluation and measurement of printer or monitor systems
BAM material: code=Baka
Version 2.1, n=1, L1, CoSpc=1
Fe38~7; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. B4 to B7 similar ISO/IEC,-Test chart 2, rgb* interpretation
input: rgb~>rgb* setrgbcolor
output: rgb*~>cmyn6* setcmyk

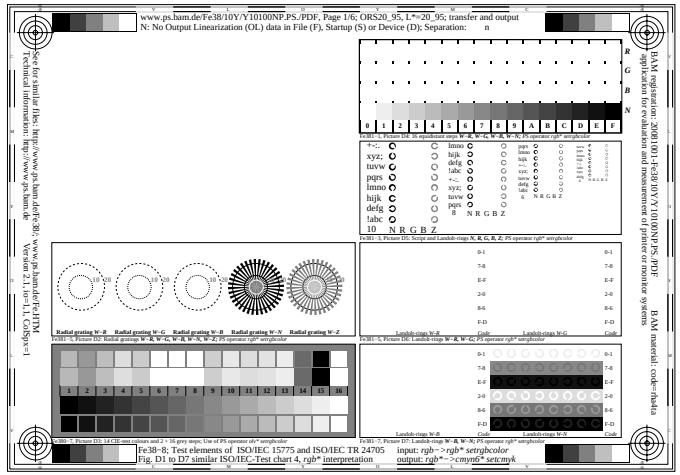
www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D); Separation: n
See for samples files: http://www.ps.bam.de/Fe38/ Technical information: http://www.ps.bam.de/
BAM magnification: 200B10P1 / Fe38/10Y/Y10100NP.PS./PDF
application for evaluation and measurement of printer or monitor systems
BAM material: code=Baka
Version 2.1, n=1, L1, CoSpc=1
Fe38~8; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. D1 to D7 similar ISO/IEC,-Test chart 4, rgb* interpretation
input: rgb~>rgb* setrgbcolor
output: rgb*~>cmyn6* setcmyk

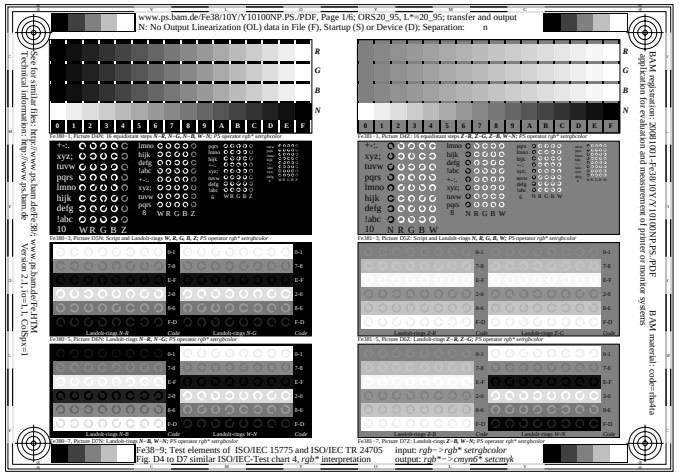
www.ps.bam.de/Fe38/10Y/Y10100NP.PS./PDF, Page 1/6; ORS20_95, L*=20_95; transfer and output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D); Separation: n
See for samples files: http://www.ps.bam.de/Fe38/ Technical information: http://www.ps.bam.de/
BAM magnification: 200B10P1 / Fe38/10Y/Y10100NP.PS./PDF
application for evaluation and measurement of printer or monitor systems
BAM material: code=Baka
Version 2.1, n=1, L1, CoSpc=1
Fe38~9; Test elements of ISO/IEC 15775 and ISO/IEC TR 24705
Fig. D4 to D7 similar ISO/IEC,-Test chart 4, rgb* interpretation
input: rgb~>rgb* setrgbcolor
output: rgb*~>cmyn6* setcmyk