


Input and output:  
 Colorimetric Printer Reflective System FRS12\_95a  
 data for any colour:

$u^*_d$  and number *no.* = 00 .. 15  
 device hue text:  
 $u^*_d = 16$  hues *o00y, o25y, ..., m50o*  
 contrast reduction factor:  
 $c_R = 0.9$

FRS12\_95a; adapted (a) CIELAB data



$u^*_d$	$L^*=L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$	$u^*_e$
<i>o00y</i>	43.8	53.91	39.75	66.98	36	<i>r16j</i>
<i>o25y</i>	52.46	42.34	51.32	66.53	50	<i>r37j</i>
<i>o50y</i>	61.53	30.2	63.46	70.28	65	<i>r58j</i>
<i>o75y</i>	72.39	15.68	77.97	79.53	79	<i>r79j</i>
<i>y00l</i>	87.58	-4.65	98.29	98.4	93	<i>j01g</i>
<i>y25l</i>	75.85	-21.67	80.26	83.13	105	<i>j18g</i>
<i>y50l</i>	66.91	-34.64	66.52	75.0	118	<i>j36g</i>
<i>y75l</i>	59.24	-45.77	54.72	71.34	130	<i>j53g</i>
<i>l00c</i>	51.95	-56.34	43.53	71.2	142	<i>j71g</i>
<i>l50c</i>	56.92	-36.83	-3.17	36.97	185	<i>g21b</i>
<i>c00v</i>	59.62	-26.2	-28.62	38.8	228	<i>g60b</i>
<i>c50v</i>	47.22	-0.62	-37.28	37.29	269	<i>g97b</i>
<i>v00m</i>	25.01	45.2	-52.8	69.51	311	<i>b34r</i>
<i>v50m</i>	34.93	57.3	-41.93	71.01	324	<i>b45r</i>
<i>m00o</i>	45.88	70.67	-29.93	76.75	337	<i>b57r</i>
<i>m50o</i>	44.77	61.72	7.28	62.15	7	<i>b83r</i>



%Gamut  
 $u^*_{rel} = 88$   
 %Regularity  
 $g^*_{H,rel} = 31$   
 $g^*_{C,rel} = 39$

FRS12\_95a; adapted (a) CIELAB data

Name	$L^*=L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$
O <sub>Ma</sub>	43.8	53.91	39.75	66.98	36
Y <sub>Ma</sub>	87.58	-4.65	98.29	98.4	93
L <sub>Ma</sub>	51.95	-56.34	43.53	71.2	142
C <sub>Ma</sub>	59.62	-26.2	-28.62	38.8	228
V <sub>Ma</sub>	25.01	45.2	-52.8	69.51	311
M <sub>Ma</sub>	45.88	70.67	-29.93	76.75	337
N <sub>Ma</sub>	20.0	0.0	0.0	0.0	0
W <sub>Ma</sub>	95.0	0.0	0.0	0.0	0
O <sub>CIE</sub>	39.92	58.74	27.99	65.07	25
Y <sub>CIE</sub>	81.26	-2.89	71.56	71.62	92
L <sub>CIE</sub>	52.23	-42.42	13.6	44.55	162
V <sub>CIE</sub>	30.57	1.41	-46.47	46.49	272

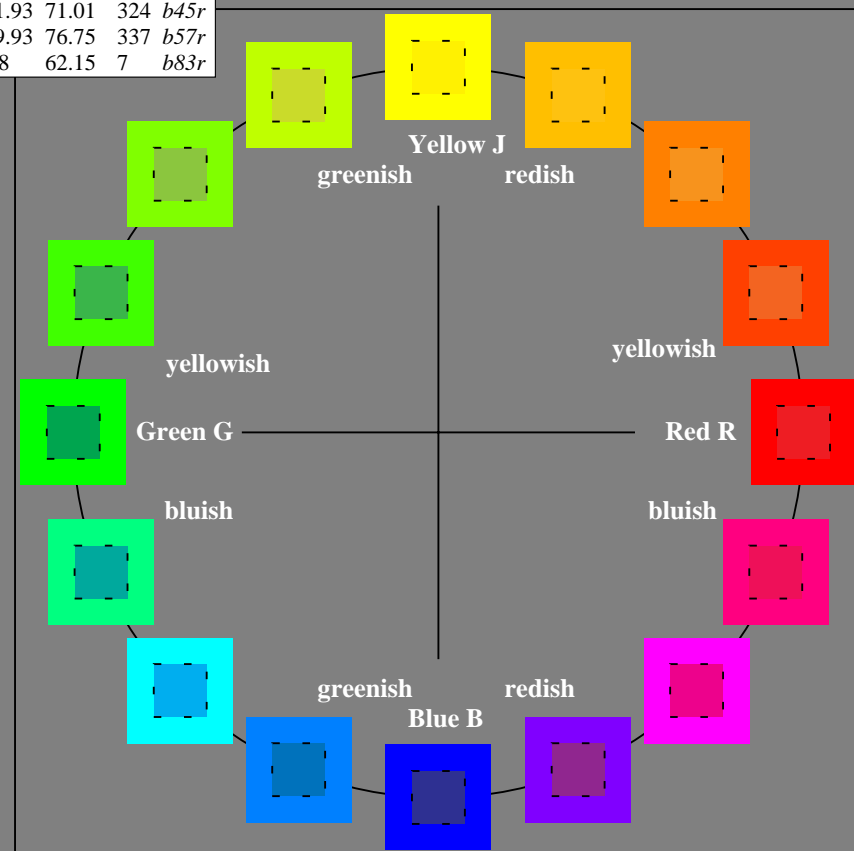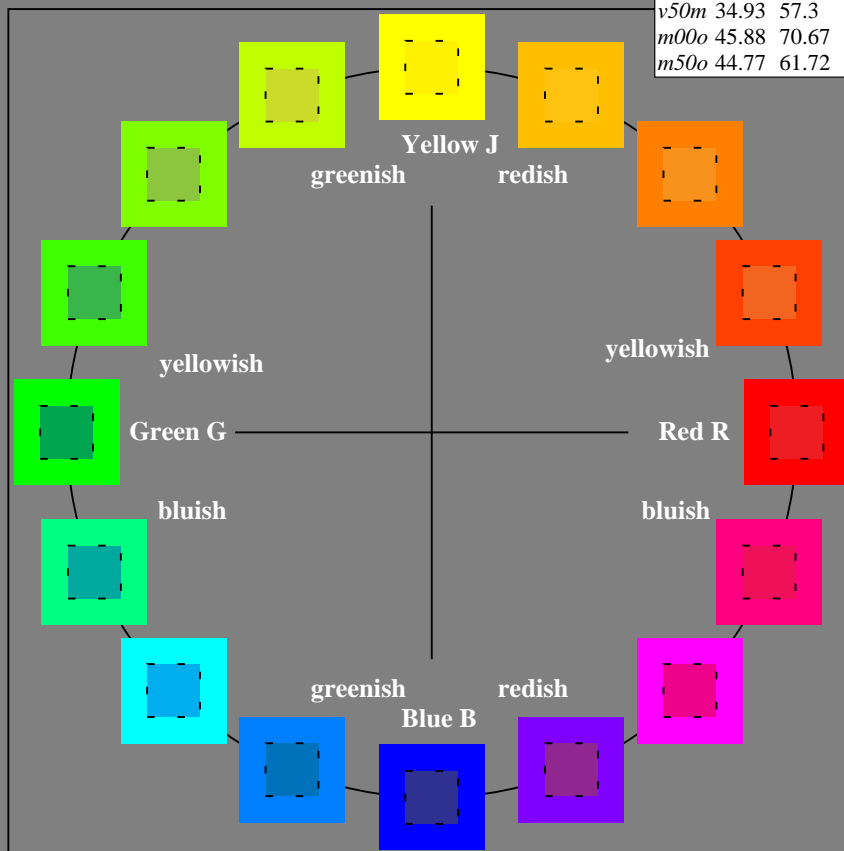

See for similar files: <http://www.ps.bam.de/Fe75/>; [www.ps.bam.de/Fe.HTM](http://www.ps.bam.de/Fe.HTM)  
 Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpx=0


BAM registration: 20081001-Fe75/10L/L75e00NP.PDF/ .PS BAM material: code=rh4ta  
 application for evaluation and measurement of printer or monitor systems

Input and output:  
 Colorimetric Printer Reflective System FRS12\_95a  
 data for any colour:

$u^*_d$  and number *no.* = 00 .. 15  
 device hue text:  
 $u^*_d = 16$  hues *o00y, o25y, ..., m50o*  
 contrast reduction factor:  
 $c_R = 0.9$

FRS12\_95a; adapted (a) CIELAB data

$u^*_d$	$L^*=L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$	$u^*_e$
<i>o00y</i>	43.8	53.91	39.75	66.98	36	<i>r16j</i>
<i>o25y</i>	52.46	42.34	51.32	66.53	50	<i>r37j</i>
<i>o50y</i>	61.53	30.2	63.46	70.28	65	<i>r58j</i>
<i>o75y</i>	72.39	15.68	77.97	79.53	79	<i>r79j</i>
<i>y00l</i>	87.58	-4.65	98.29	98.4	93	<i>j01g</i>
<i>y25l</i>	75.85	-21.67	80.26	83.13	105	<i>j18g</i>
<i>y50l</i>	66.91	-34.64	66.52	75.0	118	<i>j36g</i>
<i>y75l</i>	59.24	-45.77	54.72	71.34	130	<i>j53g</i>
<i>l00c</i>	51.95	-56.34	43.53	71.2	142	<i>j71g</i>
<i>c00v</i>	56.92	-36.83	-3.17	36.97	185	<i>g21b</i>
<i>c50v</i>	59.62	-26.2	-28.62	38.8	228	<i>g60b</i>
<i>v00m</i>	47.22	-0.62	-37.28	37.29	269	<i>g97b</i>
<i>v50m</i>	25.01	45.2	-52.8	69.51	311	<i>b34r</i>
<i>v75m</i>	34.93	57.3	-41.93	71.01	324	<i>b45r</i>
<i>m00o</i>	45.88	70.67	-29.93	76.75	337	<i>b57r</i>
<i>m50o</i>	44.77	61.72	7.28	62.15	7	<i>b83r</i>



%Gamut  
 $u^*_{rel} = 88$   
 %Regularity  
 $g^*_{H,rel} = 31$   
 $g^*_{C,rel} = 39$

FRS12\_95a; adapted (a) CIELAB data

Name	$L^*=L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$
O <sub>Ma</sub>	43.8	53.91	39.75	66.98	36
Y <sub>Ma</sub>	87.58	-4.65	98.29	98.4	93
L <sub>Ma</sub>	51.95	-56.34	43.53	71.2	142
C <sub>Ma</sub>	59.62	-26.2	-28.62	38.8	228
V <sub>Ma</sub>	25.01	45.2	-52.8	69.51	311
M <sub>Ma</sub>	45.88	70.67	-29.93	76.75	337
N <sub>Ma</sub>	20.0	0.0	0.0	0.0	0
W <sub>Ma</sub>	95.0	0.0	0.0	0.0	0
O <sub>CIE</sub>	39.92	58.74	27.99	65.07	25
Y <sub>CIE</sub>	81.26	-2.89	71.56	71.62	92
L <sub>CIE</sub>	52.23	-42.42	13.6	44.55	162
V <sub>CIE</sub>	30.57	1.41	-46.47	46.49	272




See for similar files: <http://www.ps.bam.de/Fe75/>; [www.ps.bam.de/Fe.HTM](http://www.ps.bam.de/Fe.HTM)  
 Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpx=0

BAM registration: 20081001-Fe75/10L/L75e00NP.PDF/ .PS BAM material: code=rh4ta  
 application for evaluation and measurement of printer or monitor systems

Input and output:  
 Colorimetric Printer Reflective System FRS12\_95a  
 data for any colour:


$u^*_d$  and number *no.* = 00 .. 15  
 device hue text:  
 $u^*_d = 16$  hues *o00y*, *o25y*, ..., *m50o*  
 contrast reduction factor:  
 $c_R = 0.9$

FRS12_95a; adapted (a) CIELAB data							
$u^*_d$	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$	$u^*_e$	
<i>o00y</i>	43.8	53.91	39.75	66.98	36	<i>r16j</i>	
<i>o25y</i>	52.46	42.34	51.32	66.53	50	<i>r37j</i>	
<i>o50y</i>	61.53	30.2	63.46	70.28	65	<i>r58j</i>	
<i>o75y</i>	72.39	15.68	77.97	79.53	79	<i>r79j</i>	
<i>y00l</i>	87.58	-4.65	98.29	83.1	93	<i>j01g</i>	
<i>y25l</i>	75.85	-21.67	80.26	98.4	105	<i>j18g</i>	
<i>y50l</i>	66.91	-34.64	66.52	75.0	118	<i>j36g</i>	
<i>y75l</i>	59.24	-45.77	54.72	71.34	130	<i>j53g</i>	
<i>l00c</i>	51.95	-56.34	43.57	71.2	142	<i>j71g</i>	
<i>c00v</i>	56.92	-26.2	-28.62	38.8	228	<i>g60b</i>	
<i>c50v</i>	47.22	-0.62	-37.28	37.29	269	<i>g97b</i>	
<i>v00m</i>	25.01	45.2	-52.8	69.51	311	<i>b34r</i>	
<i>v50m</i>	34.93	57.3	-41.93	71.01	324	<i>b45r</i>	
<i>m00o</i>	45.88	70.67	-29.93	76.75	337	<i>b57r</i>	
<i>m50o</i>	44.77	61.72	7.28	62.15	7	<i>b83r</i>	



%Gamut  
 $u^*_{rel} = 88$   
 %Regularity  
 $g^*_{H,rel} = 31$   
 $g^*_{C,rel} = 39$

FRS12_95a; adapted (a) CIELAB data					
Name	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$
O <sub>Ma</sub>	43.8	53.91	39.75	66.98	36
Y <sub>Ma</sub>	87.58	-4.65	98.29	98.4	93
L <sub>Ma</sub>	51.95	-56.34	43.53	71.2	142
C <sub>Ma</sub>	59.62	-26.2	-28.62	38.8	228
V <sub>Ma</sub>	25.01	45.2	-52.8	69.51	311
M <sub>Ma</sub>	45.88	70.67	-29.93	76.75	337
N <sub>Ma</sub>	20.0	0.0	0.0	0.0	0
W <sub>Ma</sub>	95.0	0.0	0.0	0.0	0
O <sub>CIE</sub>	39.92	58.74	27.99	65.07	25
Y <sub>CIE</sub>	81.26	-2.89	71.56	71.62	92
L <sub>CIE</sub>	52.23	-42.42	13.6	44.55	162
V <sub>CIE</sub>	30.57	1.41	-46.47	46.49	272

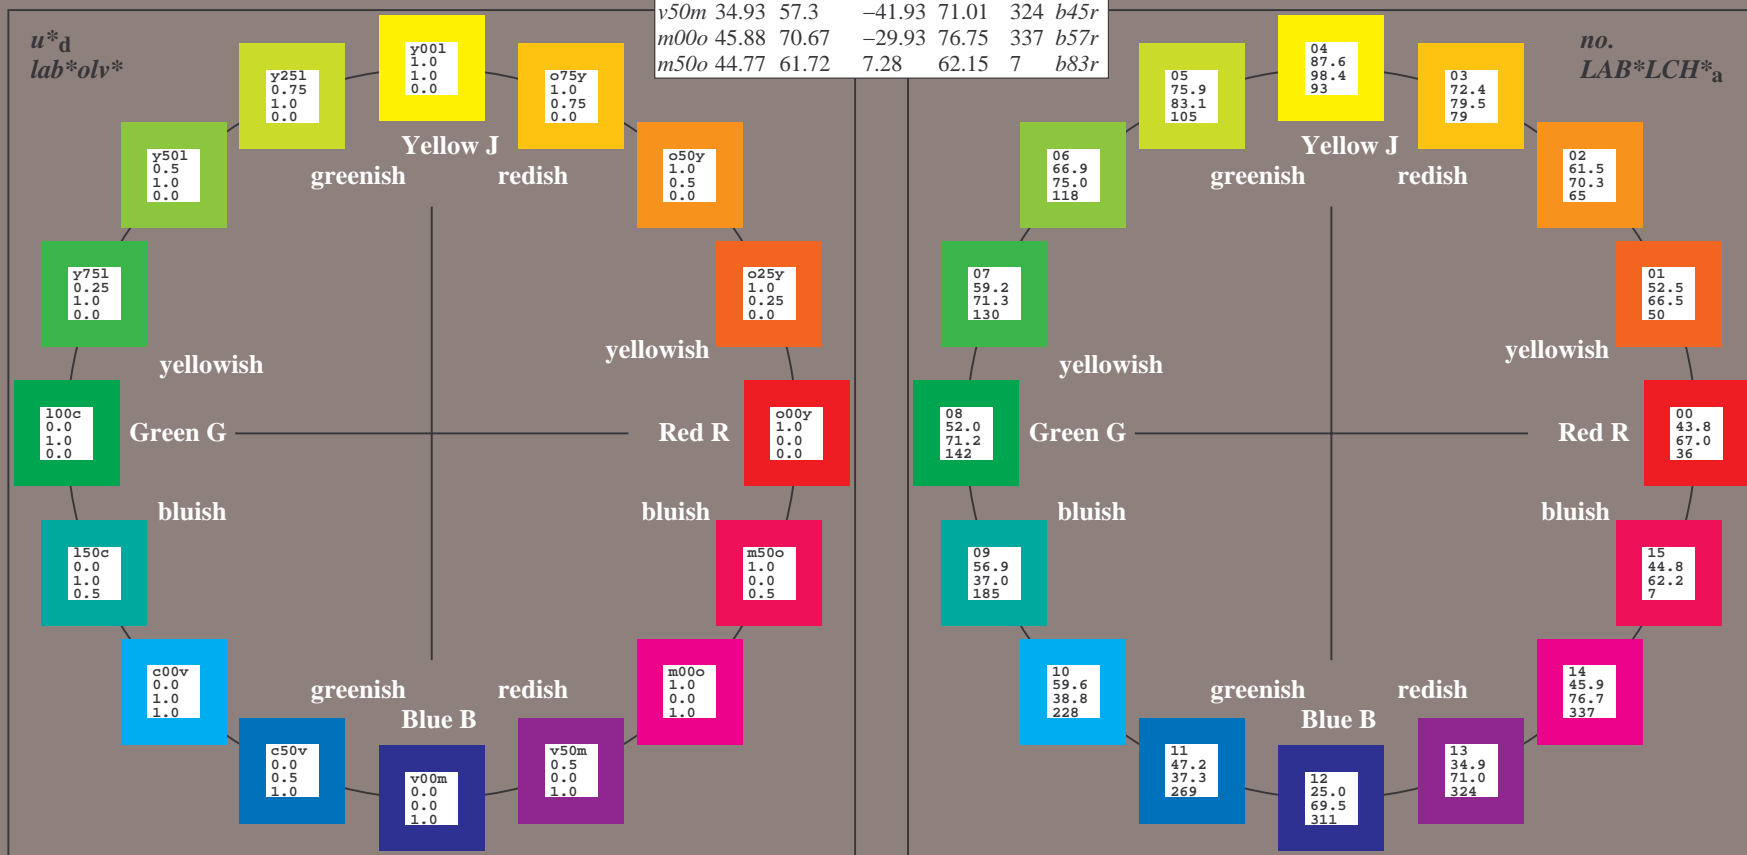


See for similar files: <http://www.ps.bam.de/Fe75/>; [www.ps.bam.de/Fe75/10L/L75e00NP.PDF/](http://www.ps.bam.de/Fe75/10L/L75e00NP.PDF/) .PS  
 Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpx=0

BAM registration: 20081001-Fe75/10L/L75e00NP.PDF/ .PS  
 application for evaluation and measurement of printer or monitor systems  
 BAM material: code=rh4ta

Input and output:  
 Colorimetric Printer Reflective System FRS12\_95a  
 data for any colour:


$u^*_d$  and number *no.* = 00 .. 15  
 device hue text:  
 $u^*_d = 16$  hues *o00y, o25y, ..., m50o*  
 contrast reduction factor:  
 $c_R = 0.9$

FRS12_95a; adapted (a) CIELAB data							
$u^*_d$	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$	$u^*_e$	
<i>o00y</i>	43.8	53.91	39.75	66.98	36	<i>r16j</i>	
<i>o25y</i>	52.46	42.34	51.32	66.53	50	<i>r37j</i>	
<i>o50y</i>	61.53	30.2	63.46	70.28	65	<i>r58j</i>	
<i>o75y</i>	72.39	15.68	77.97	79.53	79	<i>r79j</i>	
<i>y00l</i>	87.58	-4.65	98.29	83.1	93	<i>j01g</i>	
<i>y25l</i>	75.85	-21.67	80.26	98.4	105	<i>j18g</i>	
<i>y50l</i>	66.91	-34.64	66.52	75.0	118	<i>j36g</i>	
<i>y75l</i>	59.24	-45.77	54.72	71.34	130	<i>j53g</i>	
<i>100c</i>	51.95	-56.34	43.57	71.2	142	<i>j71g</i>	
<i>c00v</i>	56.92	-36.83	-3.17	36.97	185	<i>g21b</i>	
<i>c50v</i>	47.22	-0.62	-37.28	37.29	269	<i>g97b</i>	
<i>v00m</i>	25.01	45.2	-52.8	69.51	311	<i>b34r</i>	
<i>v50m</i>	34.93	57.3	-41.93	71.01	324	<i>b45r</i>	
<i>m00o</i>	45.88	70.67	-29.93	76.75	337	<i>b57r</i>	
<i>m50o</i>	44.77	61.72	7.28	62.15	7	<i>b83r</i>	



%Gamut  
 $u^*_{rel} = 88$   
 %Regularity  
 $g^*_{H,rel} = 31$   
 $g^*_{C,rel} = 39$

FRS12_95a; adapted (a) CIELAB data					
Name	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$
O <sub>Ma</sub>	43.8	53.91	39.75	66.98	36
Y <sub>Ma</sub>	87.58	-4.65	98.29	98.4	93
L <sub>Ma</sub>	51.95	-56.34	43.53	71.2	142
C <sub>Ma</sub>	59.62	-26.2	-28.62	38.8	228
V <sub>Ma</sub>	25.01	45.2	-52.8	69.51	311
M <sub>Ma</sub>	45.88	70.67	-29.93	76.75	337
N <sub>Ma</sub>	20.0	0.0	0.0	0.0	0
W <sub>Ma</sub>	95.0	0.0	0.0	0.0	0
O <sub>CIE</sub>	39.92	58.74	27.99	65.07	25
Y <sub>CIE</sub>	81.26	-2.89	71.56	71.62	92
L <sub>CIE</sub>	52.23	-42.42	13.6	44.55	162
V <sub>CIE</sub>	30.57	1.41	-46.47	46.49	272

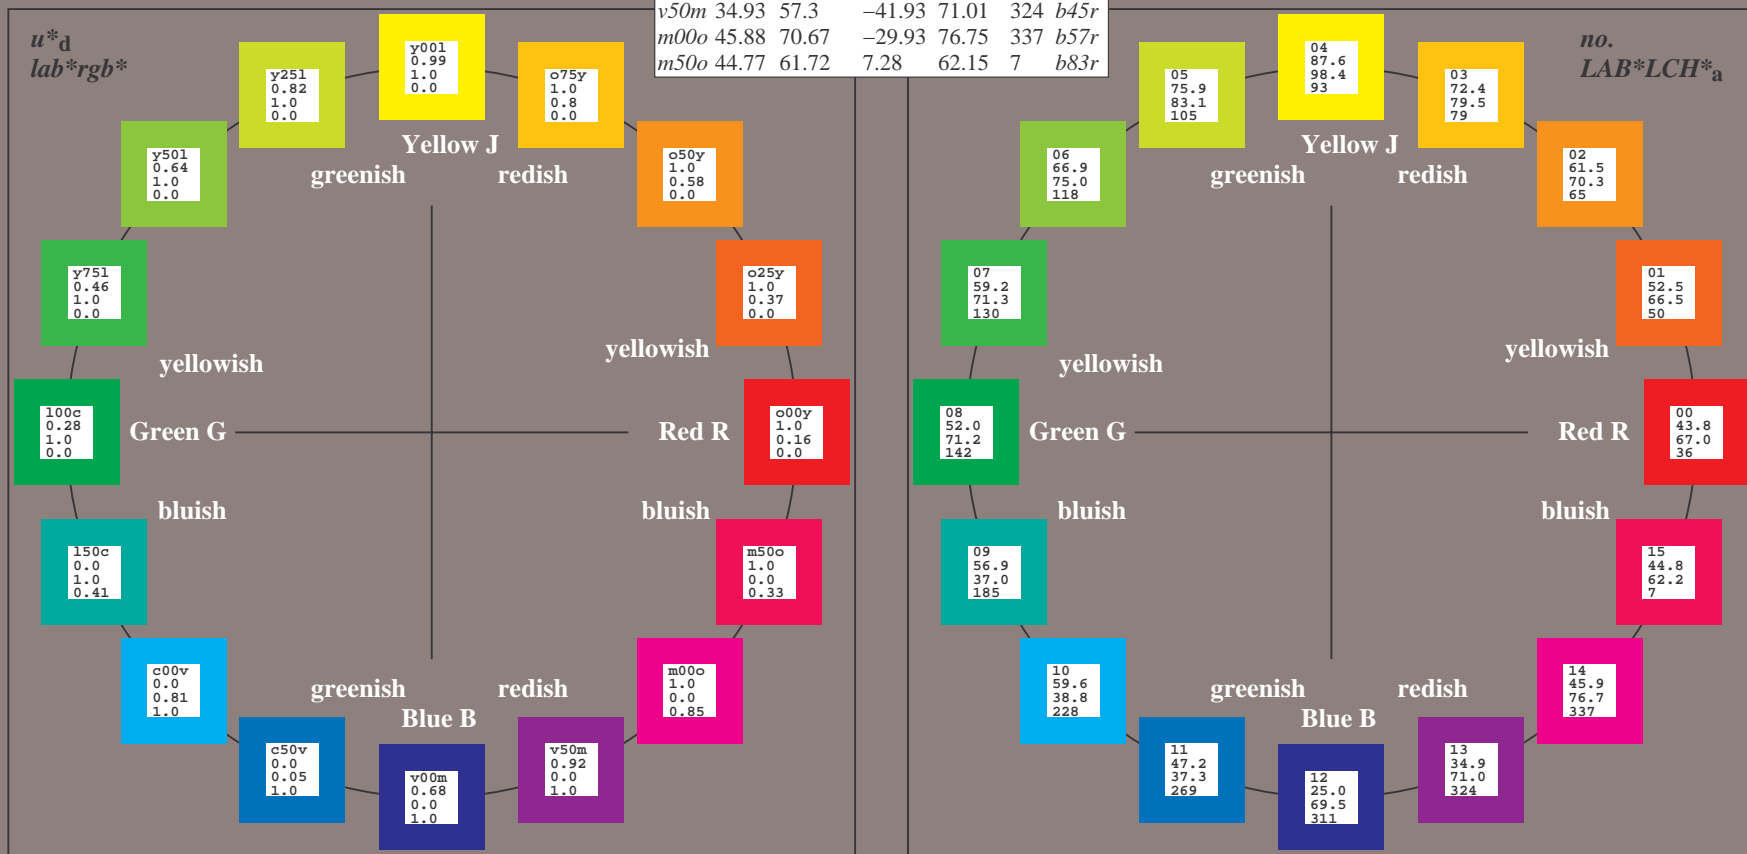


See for similar files: <http://www.ps.bam.de/Fe75/>; [www.ps.bam.de/Fe75/10L/L75e00NP.PDF/](http://www.ps.bam.de/Fe75/10L/L75e00NP.PDF/) .PS  
 Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpX=0

BAM registration: 20081001-Fe75/10L/L75e00NP.PDF/ .PS BAM material: code=rh4ta  
 application for evaluation and measurement of printer or monitor systems

Input and output:  
 Colorimetric Printer Reflective System FRS12\_95a  
 data for any colour:


$u^*_d$  and number *no.* = 00 .. 15  
 device hue text:  
 $u^*_d = 16$  hues *o00y*, *o25y*, ..., *m50o*  
 contrast reduction factor:  
 $c_R = 0.9$

FRS12_95a; adapted (a) CIELAB data							
$u^*_d$	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$	$u^*_e$	
<i>o00y</i>	43.8	53.91	39.75	66.98	36	<i>r16j</i>	
<i>o25y</i>	52.46	42.34	51.32	66.53	50	<i>r37j</i>	
<i>o50y</i>	61.53	30.2	63.46	70.28	65	<i>r58j</i>	
<i>o75y</i>	72.39	15.68	77.97	79.53	79	<i>r79j</i>	
<i>y00l</i>	87.58	-4.65	98.29	98.4	93	<i>j01g</i>	
<i>y25l</i>	75.85	-21.67	80.26	83.1	105	<i>j18g</i>	
<i>y50l</i>	66.91	-34.64	66.52	75.0	118	<i>j36g</i>	
<i>y75l</i>	59.24	-45.77	54.72	71.34	130	<i>j53g</i>	
<i>100c</i>	51.95	-56.34	43.57	71.2	142	<i>j71g</i>	
<i>l50c</i>	56.92	-36.83	-3.17	36.97	185	<i>g21b</i>	
<i>c00v</i>	59.62	-26.2	-28.62	38.8	228	<i>g60b</i>	
<i>c50v</i>	47.22	-0.62	-37.28	37.29	269	<i>g97b</i>	
<i>v00m</i>	25.01	45.2	-52.8	69.51	311	<i>b34r</i>	
<i>v50m</i>	34.93	57.3	-41.93	71.01	324	<i>b45r</i>	
<i>m00o</i>	45.88	70.67	-29.93	76.75	337	<i>b57r</i>	
<i>m50o</i>	44.77	61.72	7.28	62.15	7	<i>b83r</i>	



%Gamut  
 $u^*_{rel} = 88$   
 %Regularity  
 $g^*_{H,rel} = 31$   
 $g^*_{C,rel} = 39$

FRS12_95a; adapted (a) CIELAB data					
Name	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$
O <sub>Ma</sub>	43.8	53.91	39.75	66.98	36
Y <sub>Ma</sub>	87.58	-4.65	98.29	98.4	93
L <sub>Ma</sub>	51.95	-56.34	43.53	71.2	142
C <sub>Ma</sub>	59.62	-26.2	-28.62	38.8	228
V <sub>Ma</sub>	25.01	45.2	-52.8	69.51	311
M <sub>Ma</sub>	45.88	70.67	-29.93	76.75	337
N <sub>Ma</sub>	20.0	0.0	0.0	0.0	0
W <sub>Ma</sub>	95.0	0.0	0.0	0.0	0
O <sub>CIE</sub>	39.92	58.74	27.99	65.07	25
Y <sub>CIE</sub>	81.26	-2.89	71.56	71.62	92
L <sub>CIE</sub>	52.23	-42.42	13.6	44.55	162
V <sub>CIE</sub>	30.57	1.41	-46.47	46.49	272

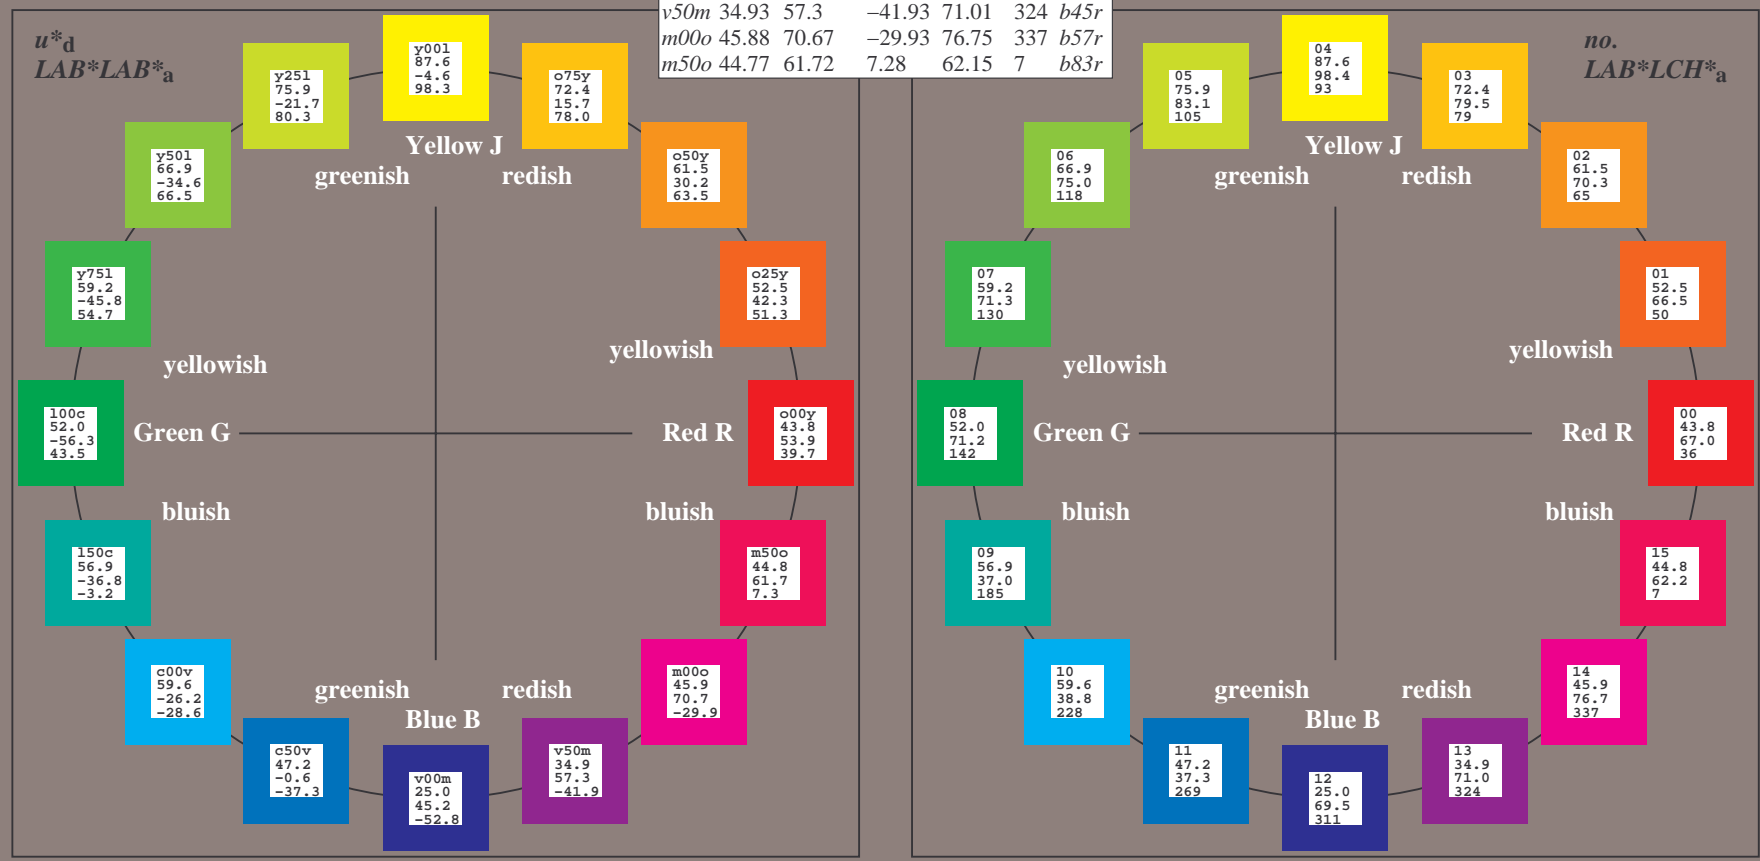


See for similar files: <http://www.ps.bam.de/Fe75/>; [www.ps.bam.de/Fe75/10L/L75e00NP.PDF/](http://www.ps.bam.de/Fe75/10L/L75e00NP.PDF/) .PS  
 Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpX=0

BAM registration: 20081001-Fe75/10L/L75e00NP.PDF/ .PS  
 application for evaluation and measurement of printer or monitor systems  
 BAM material: code=rhadata

Input and output:  
 Colorimetric Printer Reflective System FRS12\_95a  
 data for any colour:


$u^*_d$  and number *no.* = 00 .. 15  
 device hue text:  
 $u^*_d = 16$  hues *o00y, o25y, ..., m50o*  
 contrast reduction factor:  
 $c_R = 0.9$

FRS12_95a; adapted (a) CIELAB data							
$u^*_d$	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$	$u^*_e$	
<i>o00y</i>	43.8	53.91	39.75	66.98	36	<i>r16j</i>	
<i>o25y</i>	52.46	42.34	51.32	66.53	50	<i>r37j</i>	
<i>o50y</i>	61.53	30.2	63.46	70.28	65	<i>r58j</i>	
<i>o75y</i>	72.39	15.68	77.97	79.53	79	<i>r79j</i>	
<i>y00l</i>	87.58	-4.65	98.29	98.4	93	<i>j01g</i>	
<i>y25l</i>	75.85	-21.67	80.26	83.1	105	<i>j18g</i>	
<i>y50l</i>	66.91	-34.64	66.52	75.0	118	<i>j36g</i>	
<i>y75l</i>	59.24	-45.77	54.72	71.34	130	<i>j53g</i>	
<i>100c</i>	51.95	-56.34	43.57	71.2	142	<i>j71g</i>	
<i>l50c</i>	56.92	-36.83	-3.17	36.97	185	<i>g21b</i>	
<i>c00v</i>	59.62	-26.2	-28.62	38.8	228	<i>g60b</i>	
<i>c50v</i>	47.22	-0.62	-37.28	37.29	269	<i>g97b</i>	
<i>v00m</i>	25.01	45.2	-52.8	69.51	311	<i>b34r</i>	
<i>v50m</i>	34.93	57.3	-41.93	71.01	324	<i>b45r</i>	
<i>m00o</i>	45.88	70.67	-29.93	76.75	337	<i>b57r</i>	
<i>m50o</i>	44.77	61.72	7.28	62.15	7	<i>b83r</i>	



%Gamut  
 $u^*_{rel} = 88$   
 %Regularity  
 $g^*_{H,rel} = 31$   
 $g^*_{C,rel} = 39$

FRS12_95a; adapted (a) CIELAB data					
Name	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$
O <sub>Ma</sub>	43.8	53.91	39.75	66.98	36
Y <sub>Ma</sub>	87.58	-4.65	98.29	98.4	93
L <sub>Ma</sub>	51.95	-56.34	43.53	71.2	142
C <sub>Ma</sub>	59.62	-26.2	-28.62	38.8	228
V <sub>Ma</sub>	25.01	45.2	-52.8	69.51	311
M <sub>Ma</sub>	45.88	70.67	-29.93	76.75	337
N <sub>Ma</sub>	20.0	0.0	0.0	0.0	0
W <sub>Ma</sub>	95.0	0.0	0.0	0.0	0
O <sub>CIE</sub>	39.92	58.74	27.99	65.07	25
Y <sub>CIE</sub>	81.26	-2.89	71.56	71.62	92
L <sub>CIE</sub>	52.23	-42.42	13.6	44.55	162
V <sub>CIE</sub>	30.57	1.41	-46.47	46.49	272

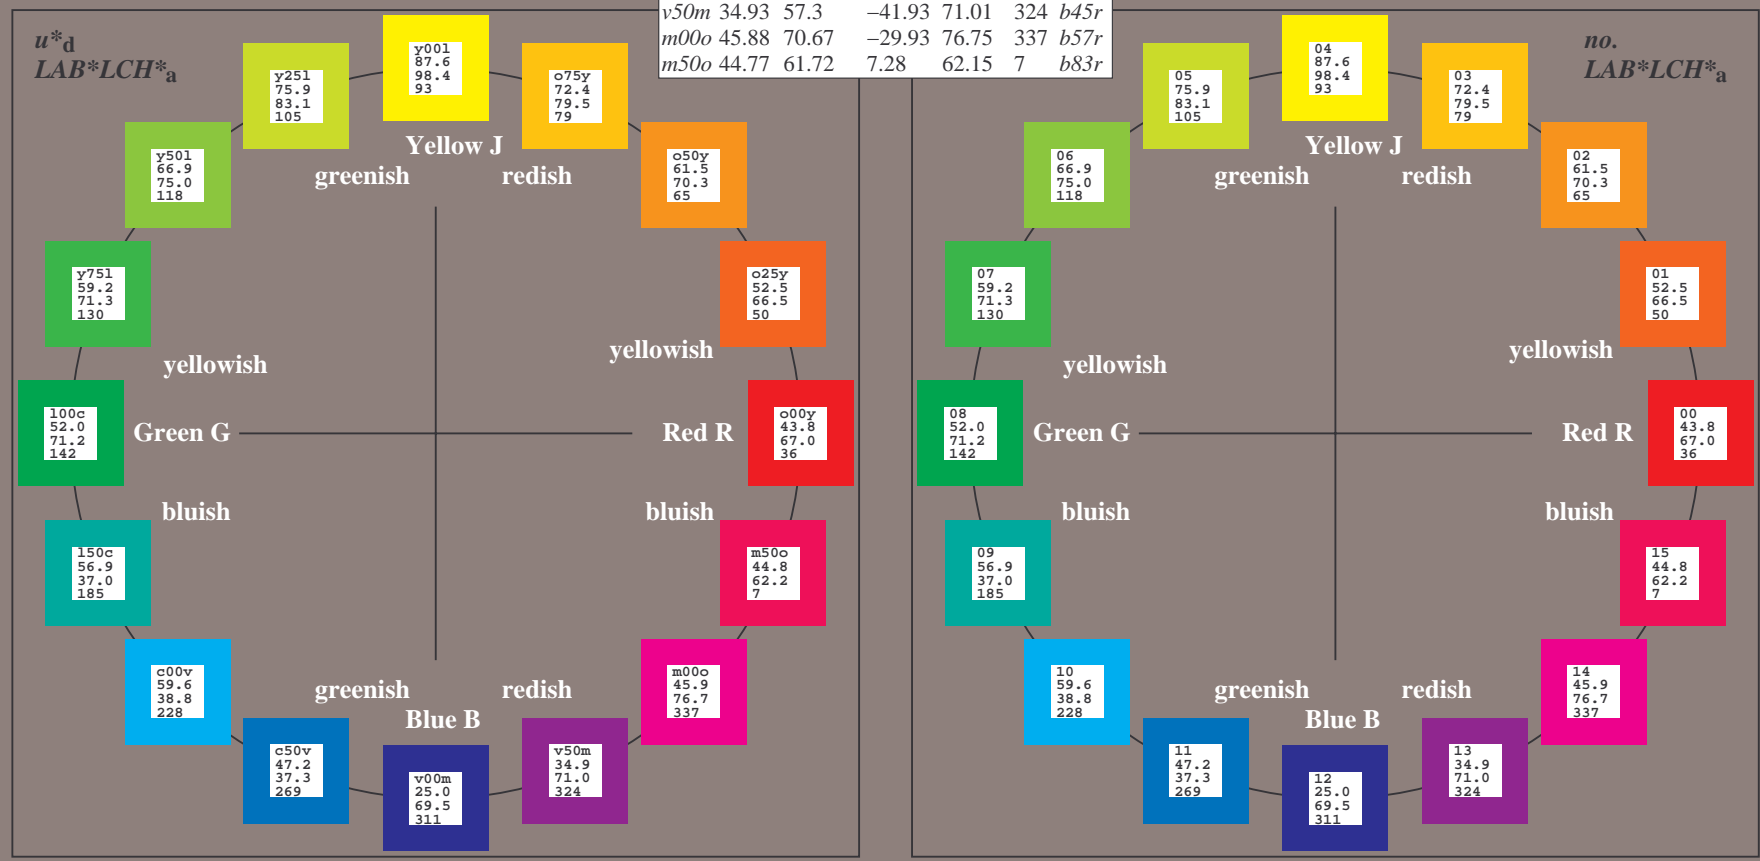


See for similar files: <http://www.ps.bam.de/Fe75/>; [www.ps.bam.de/Fe.HTM](http://www.ps.bam.de/Fe.HTM)  
 Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpX=0

BAM registration: 20081001-Fe75/10L/L75e00NP.PDF/ .PS BAM material: code=rhadata  
 application for evaluation and measurement of printer or monitor systems

Input and output:  
 Colorimetric Printer Reflective System FRS12\_95a  
 data for any colour:


$u^*_d$  and number *no.* = 00 .. 15  
 device hue text:  
 $u^*_d = 16$  hues *o00y*, *o25y*, ..., *m50o*  
 contrast reduction factor:  
 $c_R = 0.9$

FRS12_95a; adapted (a) CIELAB data							
$u^*_d$	$L^*=L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$	$u^*_e$	
<i>o00y</i>	43.8	53.91	39.75	66.98	36	<i>r16j</i>	
<i>o25y</i>	52.46	42.34	51.32	66.53	50	<i>r37j</i>	
<i>o50y</i>	61.53	30.2	63.46	70.28	65	<i>r58j</i>	
<i>o75y</i>	72.39	15.68	77.97	79.53	79	<i>r79j</i>	
<i>y00l</i>	87.58	-4.65	98.29	98.4	93	<i>j01g</i>	
<i>y25l</i>	75.85	-21.67	80.26	83.13	105	<i>j18g</i>	
<i>y50l</i>	66.91	-34.64	66.52	75.0	118	<i>j36g</i>	
<i>y75l</i>	59.24	-45.77	54.72	71.34	130	<i>j53g</i>	
<i>100c</i>	51.95	-56.34	43.57	71.2	142	<i>j71g</i>	
<i>l50c</i>	56.92	-36.83	-3.17	36.97	185	<i>g21b</i>	
<i>c00v</i>	59.62	-26.2	-28.62	38.8	228	<i>g60b</i>	
<i>c50v</i>	47.22	-0.62	-37.28	37.29	269	<i>g97b</i>	
<i>v00m</i>	25.01	45.2	-52.8	69.51	311	<i>b34r</i>	
<i>v50m</i>	34.93	57.3	-41.93	71.01	324	<i>b45r</i>	
<i>m00o</i>	45.88	70.67	-29.93	76.75	337	<i>b57r</i>	
<i>m50o</i>	44.77	61.72	7.28	62.15	7	<i>b83r</i>	



%Gamut  
 $u^*_{rel} = 88$   
 %Regularity  
 $g^*_{H,rel} = 31$   
 $g^*_{C,rel} = 39$

FRS12_95a; adapted (a) CIELAB data					
Name	$L^*=L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$
O <sub>Ma</sub>	43.8	53.91	39.75	66.98	36
Y <sub>Ma</sub>	87.58	-4.65	98.29	98.4	93
L <sub>Ma</sub>	51.95	-56.34	43.53	71.2	142
C <sub>Ma</sub>	59.62	-26.2	-28.62	38.8	228
V <sub>Ma</sub>	25.01	45.2	-52.8	69.51	311
M <sub>Ma</sub>	45.88	70.67	-29.93	76.75	337
N <sub>Ma</sub>	20.0	0.0	0.0	0.0	0
W <sub>Ma</sub>	95.0	0.0	0.0	0.0	0
O <sub>CIE</sub>	39.92	58.74	27.99	65.07	25
Y <sub>CIE</sub>	81.26	-2.89	71.56	71.62	92
L <sub>CIE</sub>	52.23	-42.42	13.6	44.55	162
V <sub>CIE</sub>	30.57	1.41	-46.47	46.49	272

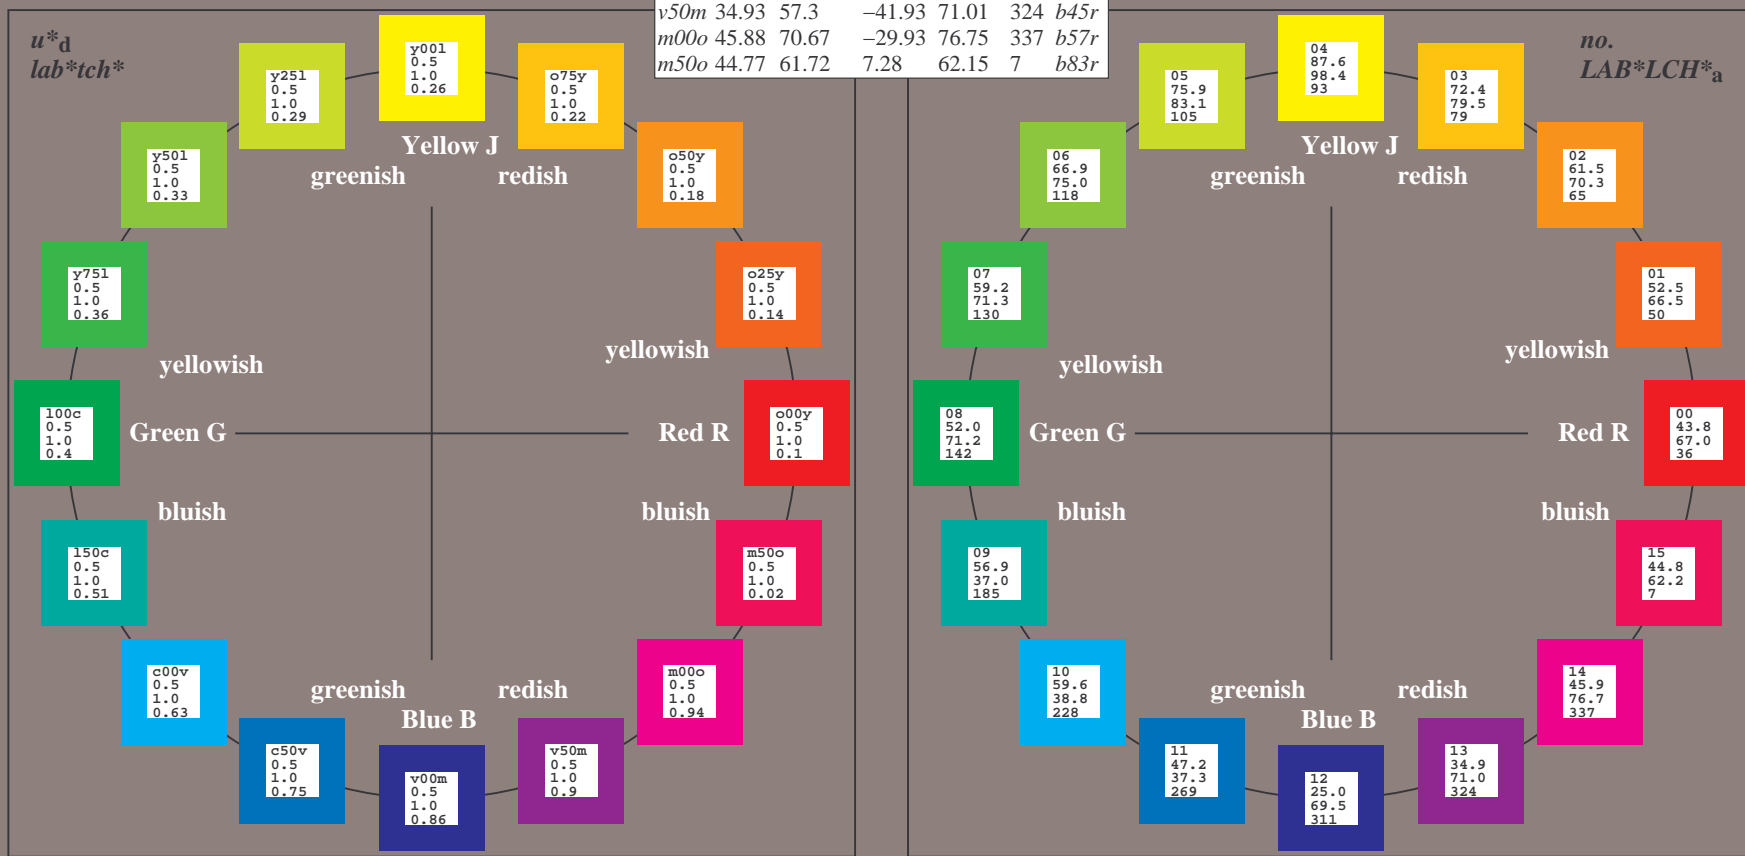


See for similar files: <http://www.ps.bam.de/Fe75/>; [www.ps.bam.de/Fe.HTM](http://www.ps.bam.de/Fe.HTM)  
 Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpX=0

BAM registration: 20081001-Fe75/10L/L75e00NP.PDF/ .PS BAM material: code=rh4ta  
 application for evaluation and measurement of printer or monitor systems

Input and output:  
 Colorimetric Printer Reflective System FRS12\_95a  
 data for any colour:


$u^*_d$  and number *no.* = 00 .. 15  
 device hue text:  
 $u^*_d = 16$  hues *o00y*, *o25y*, ..., *m50o*  
 contrast reduction factor:  
 $c_R = 0.9$

FRS12_95a; adapted (a) CIELAB data							
$u^*_d$	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$	$u^*_e$	
<i>o00y</i>	43.8	53.91	39.75	66.98	36	<i>r16j</i>	
<i>o25y</i>	52.46	42.34	51.32	66.53	50	<i>r37j</i>	
<i>o50y</i>	61.53	30.2	63.46	70.28	65	<i>r58j</i>	
<i>o75y</i>	72.39	15.68	77.97	79.53	79	<i>r79j</i>	
<i>y00l</i>	87.58	-4.65	98.29	98.4	93	<i>j01g</i>	
<i>y25l</i>	75.85	-21.67	80.26	83.1	105	<i>j18g</i>	
<i>y50l</i>	66.91	-34.64	66.52	75.0	118	<i>j36g</i>	
<i>y75l</i>	59.24	-45.77	54.72	71.34	130	<i>j53g</i>	
<i>l00c</i>	51.95	-56.34	43.57	71.2	142	<i>j71g</i>	
<i>c00v</i>	56.92	-26.2	-28.62	38.8	228	<i>g60b</i>	
<i>c50v</i>	47.22	-0.62	-37.28	37.29	269	<i>g97b</i>	
<i>v00m</i>	25.01	45.2	-52.8	69.51	311	<i>b34r</i>	
<i>v50m</i>	34.93	57.3	-41.93	71.01	324	<i>b45r</i>	
<i>m00o</i>	45.88	70.67	-29.93	76.75	337	<i>b57r</i>	
<i>m50o</i>	44.77	61.72	7.28	62.15	7	<i>b83r</i>	



%Gamut  
 $u^*_{rel} = 88$   
 %Regularity  
 $g^*_{H,rel} = 31$   
 $g^*_{C,rel} = 39$

FRS12_95a; adapted (a) CIELAB data					
Name	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$
O <sub>Ma</sub>	43.8	53.91	39.75	66.98	36
Y <sub>Ma</sub>	87.58	-4.65	98.29	98.4	93
L <sub>Ma</sub>	51.95	-56.34	43.53	71.2	142
C <sub>Ma</sub>	59.62	-26.2	-28.62	38.8	228
V <sub>Ma</sub>	25.01	45.2	-52.8	69.51	311
M <sub>Ma</sub>	45.88	70.67	-29.93	76.75	337
N <sub>Ma</sub>	20.0	0.0	0.0	0.0	0
W <sub>Ma</sub>	95.0	0.0	0.0	0.0	0
O <sub>CIE</sub>	39.92	58.74	27.99	65.07	25
Y <sub>CIE</sub>	81.26	-2.89	71.56	71.62	92
L <sub>CIE</sub>	52.23	-42.42	13.6	44.55	162
V <sub>CIE</sub>	30.57	1.41	-46.47	46.49	272

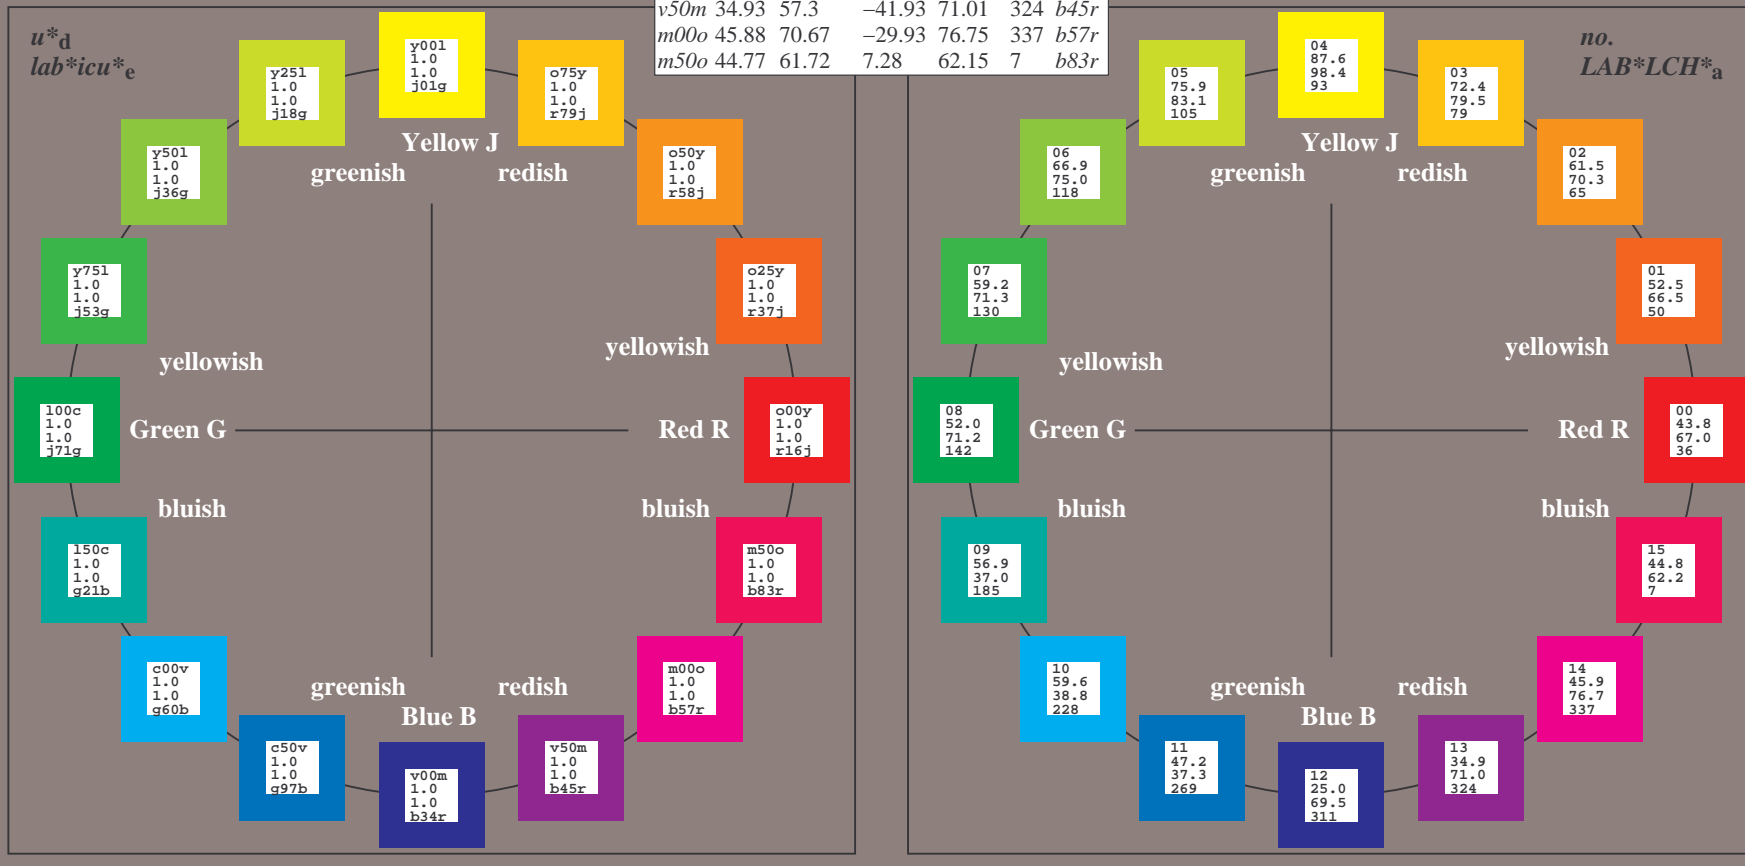

See for similar files: <http://www.ps.bam.de/Fe75/>; [www.ps.bam.de/Fe.HTM](http://www.ps.bam.de/Fe.HTM)  
 Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpx=0

BAM registration: 20081001-Fe75/10L/L75e00NP.PDF/ .PS BAM material: code=rh4ta  
 application for evaluation and measurement of printer or monitor systems




Input and output:  
 Colorimetric Printer Reflective System FRS12\_95a  
 data for any colour:

$u^*_d$  and number *no.* = 00 .. 15  
 device hue text:  
 $u^*_d = 16$  hues *o00y, o25y, ..., m50o*  
 contrast reduction factor:  
 $c_R = 0.9$

FRS12\_95a; adapted (a) CIELAB data


$u^*_d$	$L^*=L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$	$u^*_e$
<i>o00y</i>	43.8	53.91	39.75	66.98	36	<i>r16j</i>
<i>o25y</i>	52.46	42.34	51.32	66.53	50	<i>r37j</i>
<i>o50y</i>	61.53	30.2	63.46	70.28	65	<i>r58j</i>
<i>o75y</i>	72.39	15.68	77.97	79.53	79	<i>r79j</i>
<i>y00l</i>	87.58	-4.65	98.29	98.4	93	<i>j01g</i>
<i>y25l</i>	75.85	-21.67	80.26	88.13	105	<i>j18g</i>
<i>y50l</i>	66.91	-34.64	66.52	75.0	118	<i>j36g</i>
<i>y75l</i>	59.24	-45.77	54.72	71.34	130	<i>j53g</i>
<i>100c</i>	51.95	-56.34	43.57	71.2	142	<i>j71g</i>
<i>l50c</i>	56.92	-36.83	-3.17	36.97	185	<i>g21b</i>
<i>c00v</i>	59.62	-26.2	-28.62	38.8	228	<i>g60b</i>
<i>c50v</i>	47.22	-0.62	-37.28	37.29	269	<i>g97b</i>
<i>v00m</i>	25.01	45.2	-52.8	69.51	311	<i>b34r</i>
<i>v50m</i>	34.93	57.3	-41.93	71.01	324	<i>b45r</i>
<i>m00o</i>	45.88	70.67	-29.93	76.75	337	<i>b57r</i>
<i>m50o</i>	44.77	61.72	7.28	62.15	7	<i>b83r</i>



%Gamut  
 $u^*_{rel} = 88$   
 %Regularity  
 $g^*_{H,rel} = 31$   
 $g^*_{C,rel} = 39$

FRS12\_95; CIELAB data

Name	$L^*=L^*$	$a^*$	$b^*$	$C^*_{ab}$	$h^*_{ab}$
$O_M$	43.8	54.41	32.95	63.61	31
$Y_M$	87.58	-4.04	90.02	90.11	93
$L_M$	51.95	-55.83	36.46	66.68	147
$C_M$	59.62	-25.67	-35.94	44.17	234
$V_M$	25.01	45.64	-58.96	74.57	308
$M_M$	45.88	71.17	-36.79	80.12	333
$N_M$	20.0	0.43	-5.99	6.01	274
$W_M$	95.0	0.62	-8.52	8.54	274
$O_{CIE}$	39.92	58.74	27.99	65.07	25
$Y_{CIE}$	81.26	-2.89	71.56	71.62	92
$L_{CIE}$	52.23	-42.42	13.6	44.55	162
$V_{CIE}$	30.57	1.41	-46.47	46.49	272

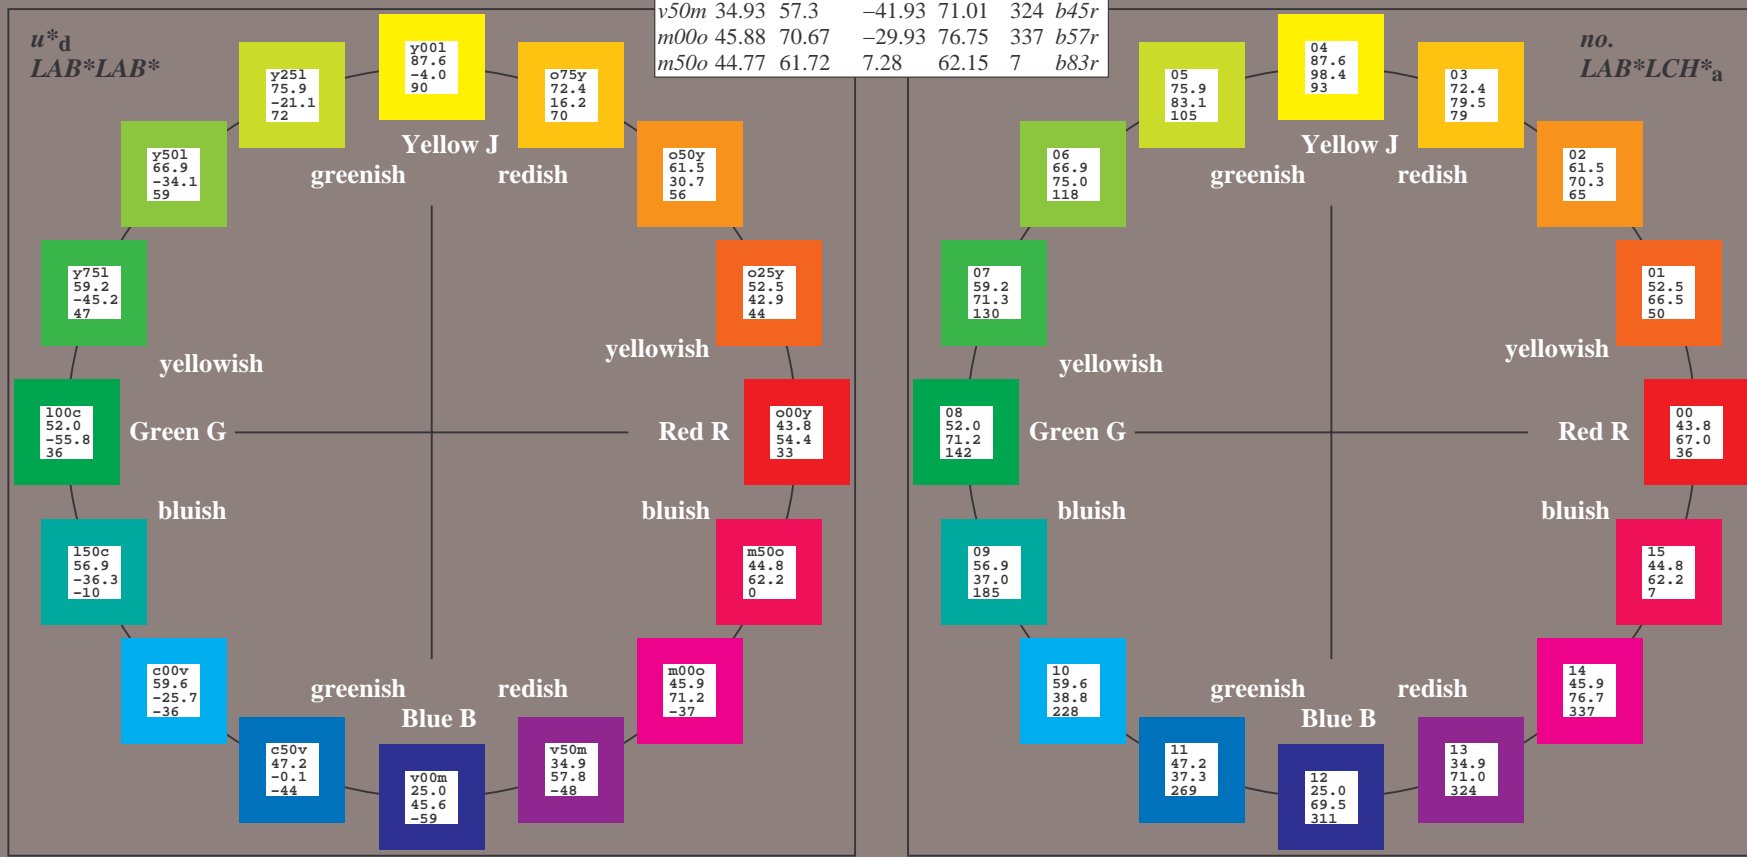


Input and output:  
 Colorimetric Printer Reflective System FRS12\_95a  
 data for any colour:

$u^*_d$  and number *no.* = 00 .. 15  
 device hue text:  
 $u^*_d = 16$  hues *o00y*, *o25y*, ..., *m50o*  
 contrast reduction factor:  
 $c_R = 0.9$

FRS12\_95a; adapted (a) CIELAB data


$u^*_d$	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$	$u^*_e$
<i>o00y</i>	43.8	53.91	39.75	66.98	36	<i>r16j</i>
<i>o25y</i>	52.46	42.34	51.32	66.53	50	<i>r37j</i>
<i>o50y</i>	61.53	30.2	63.46	70.28	65	<i>r58j</i>
<i>o75y</i>	72.39	15.68	77.97	79.53	79	<i>r79j</i>
<i>y00l</i>	87.58	-4.65	98.29	98.4	93	<i>j01g</i>
<i>y25l</i>	75.85	-21.67	80.26	83.13	105	<i>j18g</i>
<i>y50l</i>	66.91	-34.64	66.52	75.0	118	<i>j36g</i>
<i>y75l</i>	59.24	-45.77	54.72	71.34	130	<i>j53g</i>
<i>l00c</i>	51.95	-56.34	43.57	71.2	142	<i>j71g</i>
<i>c00v</i>	56.92	-26.2	-28.62	38.8	228	<i>g60b</i>
<i>c50v</i>	47.22	-0.62	-37.28	37.29	269	<i>g97b</i>
<i>v00m</i>	25.01	45.2	-52.8	69.51	311	<i>b34r</i>
<i>v50m</i>	34.93	57.3	-41.93	71.01	324	<i>b45r</i>
<i>m00o</i>	45.88	70.67	-29.93	76.75	337	<i>b57r</i>
<i>m50o</i>	44.77	61.72	7.28	62.15	7	<i>b83r</i>



%Gamut  
 $u^*_{rel} = 88$   
 %Regularity  
 $g^*_{H,rel} = 31$   
 $g^*_{C,rel} = 39$

FRS12\_95a; CIELAB data

Name	$L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab}$	$h^*_{ab}$
$O_M$	43.8	54.41	32.95	63.61	31
$Y_M$	87.58	-4.04	90.02	90.11	93
$L_M$	51.95	-55.83	36.46	66.68	147
$C_M$	59.62	-25.67	-35.94	44.17	234
$V_M$	25.01	45.64	-58.96	74.57	308
$M_M$	45.88	71.17	-36.79	80.12	333
$N_M$	20.0	0.43	-5.99	6.01	274
$W_M$	95.0	0.62	-8.52	8.54	274
$O_{CIE}$	39.12	58.74	27.99	65.07	25
$Y_{CIE}$	81.26	-2.89	71.56	71.62	92
$L_{CIE}$	52.23	-42.42	13.6	44.55	162
$V_{CIE}$	30.57	1.41	-46.47	46.49	272

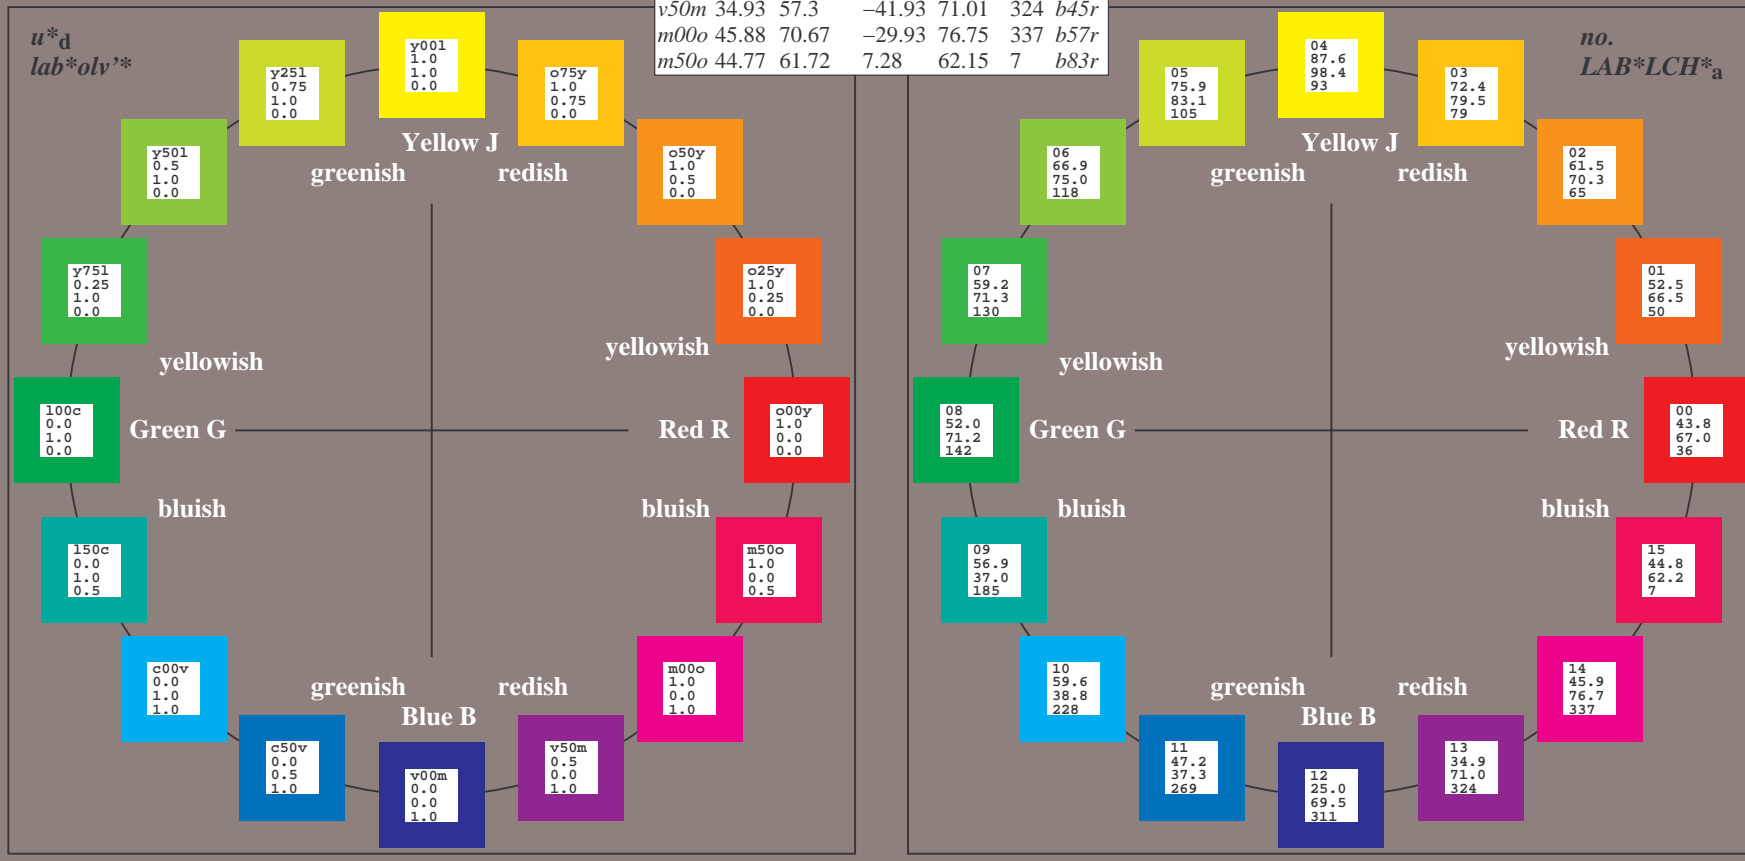

See for similar files: <http://www.ps.bam.de/Fe75/>; [www.ps.bam.de/Fe75/10L/L75e00NP.PDF/](http://www.ps.bam.de/Fe75/10L/L75e00NP.PDF/) .PS  
 Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpx=0


BAM registration: 20081001-Fe75/10L/L75e00NP.PDF/ .PS  
 application for evaluation and measurement of printer or monitor systems  
 BAM material: code=rh4ta

Input and output:  
 Colorimetric Printer Reflective System FRS12\_95a  
 data for any colour:

$u^*_d$  and number *no.* = 00 .. 15  
 device hue text:  
 $u^*_d = 16$  hues *o00y, o25y, ..., m50o*  
 contrast reduction factor:  
 $c_R = 0.9$

FRS12\_95a; adapted (a) CIELAB data


$u^*_d$	$L^*=L^*_a$	$a^*_a$	$b^*_a$	$C^*_{ab,a}$	$h^*_{ab,a}$	$u^*_e$
<i>o00y</i>	43.8	53.91	39.75	66.98	36	<i>r16j</i>
<i>o25y</i>	52.46	42.34	51.32	66.53	50	<i>r37j</i>
<i>o50y</i>	61.53	30.2	63.46	70.28	65	<i>r58j</i>
<i>o75y</i>	72.39	15.68	77.97	79.53	79	<i>r79j</i>
<i>y00l</i>	87.58	-4.65	98.29	98.4	93	<i>j18g</i>
<i>y25l</i>	75.85	-21.67	80.26	83.13	105	<i>j18g</i>
<i>y50l</i>	66.91	-34.64	66.52	75.0	118	<i>j36g</i>
<i>y75l</i>	59.24	-45.77	54.72	71.34	130	<i>j53g</i>
<i>l00c</i>	51.95	-56.34	43.57	71.2	142	<i>j71g</i>
<i>c00v</i>	56.92	-26.2	-3.17	36.97	185	<i>g21b</i>
<i>c50v</i>	59.62	-26.2	-28.62	38.8	228	<i>g60b</i>
<i>v00m</i>	47.22	-0.62	-37.28	37.29	269	<i>g97b</i>
<i>v50m</i>	25.01	45.2	-52.8	69.51	311	<i>b34r</i>
<i>m00o</i>	34.93	57.3	-41.93	71.01	324	<i>b45r</i>
<i>m50o</i>	45.88	70.67	-29.93	76.75	337	<i>b57r</i>
						<i>b83r</i>



%Gamut  
 $u^*_{rel} = 88$   
 %Regularity  
 $g^*_{H,rel} = 31$   
 $g^*_{C,rel} = 39$

FRS12\_95a; CIELAB data

Name	$L^*=L^*$	$a^*$	$b^*$	$C^*_{ab}$	$h^*_{ab}$
$O_M$	43.8	54.41	32.95	63.61	31
$Y_M$	87.58	-4.04	90.02	90.11	93
$L_M$	51.95	-55.83	36.46	66.68	147
$C_M$	59.62	-25.67	-35.94	44.17	234
$V_M$	25.01	45.64	-58.96	74.57	308
$M_M$	45.88	71.17	-36.79	80.12	333
$N_M$	20.0	0.43	-5.99	6.01	274
$W_M$	95.0	0.62	-8.52	8.54	274
$O_{CIE}$	39.92	58.74	27.99	65.07	25
$Y_{CIE}$	81.26	-2.89	71.56	71.62	92
$L_{CIE}$	52.23	-42.42	13.6	44.55	162
$V_{CIE}$	30.57	1.41	-46.47	46.49	272

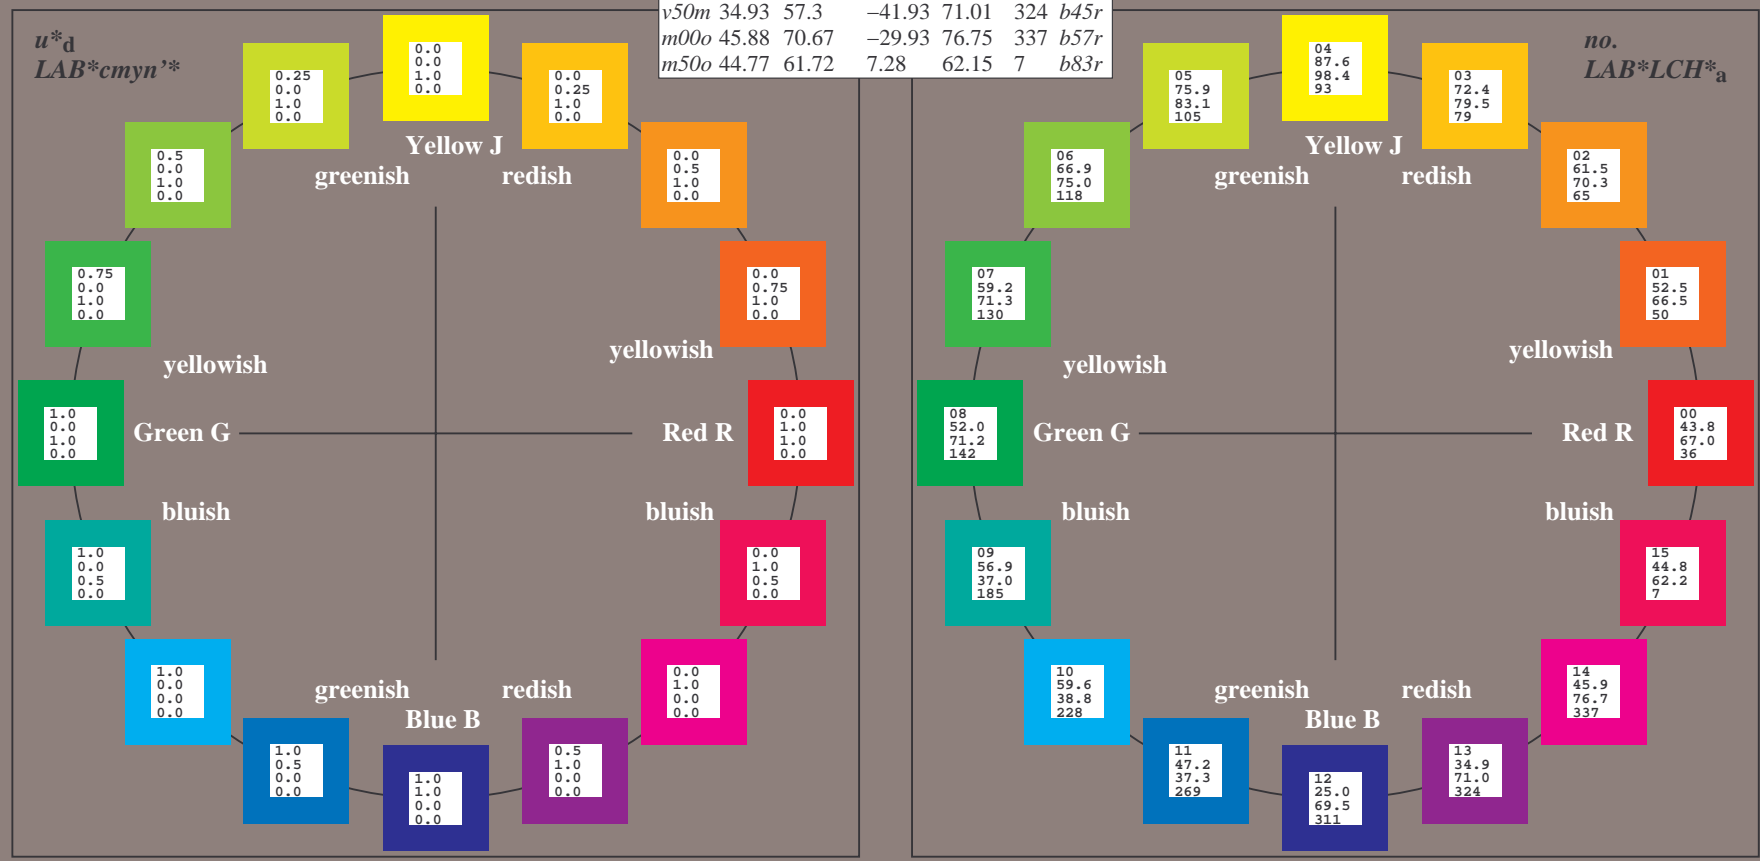

See for similar files: <http://www.ps.bam.de/Fe75/>; [www.ps.bam.de/Fe75/10L/L75e00NP.PDF/](http://www.ps.bam.de/Fe75/10L/L75e00NP.PDF/) .PS  
 Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1, ColSpX=0

BAM registration: 20081001-Fe75/10L/L75e00NP.PDF/ .PS BAM material: code=rh4ta  
 application for evaluation and measurement of printer or monitor systems