


Ein und Ausgabe:
 Farbmetrisches Drucker-Reflektiv-System FRS12_95a
 Daten für jede Farbe:
 u^*_e und Nummer $Nr. = 00 \dots 15$
 Elementar-Bunttontext:
 $u^*_e = 16$ Buntttöne $r00j, r25j, \dots, b75r$
 Kontrastreduzierungsfaktor:
 $c_R = 0.9$

FRS12_95a; adaptierte CIELAB-Daten


| u^*_e | L^*_{ab} | a^*_{ab} | b^*_{ab} | C^*_{ab} | h^*_{ab} | u^*_d |
|---------|------------|------------|------------|------------|------------|---------|
| r00j | 44.18 | 56.95 | 27.14 | 63.08 | 25 | m81o |
| r25j | 47.38 | 49.13 | 44.53 | 66.31 | 42 | o10y |
| y50j | 57.76 | 35.24 | 58.41 | 68.22 | 59 | o40y |
| r75j | 69.81 | 19.13 | 74.52 | 76.94 | 76 | o69y |
| j00g | 87.06 | -3.94 | 97.58 | 97.66 | 92 | o89y |
| j25g | 72.25 | -26.89 | 74.73 | 79.42 | 110 | y34l |
| j50g | 60.82 | -43.48 | 57.15 | 71.81 | 127 | y69l |
| j75g | 52.51 | -54.15 | 38.27 | 66.31 | 145 | l03c |
| g00b | 55.08 | -44.06 | 14.13 | 46.27 | 162 | l23c |
| g25b | 57.22 | -35.64 | -6.03 | 36.15 | 190 | l55c |
| g50b | 58.9 | -29.03 | -21.86 | 36.34 | 217 | l87c |
| g75b | 54.42 | -15.48 | -32.25 | 35.77 | 244 | c20v |
| b00r | 46.36 | 1.15 | -37.88 | 37.9 | 272 | c53v |
| b25r | 33.76 | 27.14 | -46.69 | 54.01 | 300 | c87v |
| b50r | 38.71 | 61.92 | -37.78 | 72.54 | 329 | v67m |
| b75r | 45.08 | 64.27 | -3.32 | 64.36 | 357 | m33o |



%Umfang
 $u^*_{rej} = 88$
 %Regularität
 $g^*_{H,rel} = 31$
 $g^*_{C,rel} = 39$

FRS12_95a; adaptierte CIELAB-Daten

| Name | L^*_{ab} | a^*_{ab} | b^*_{ab} | C^*_{ab} | h^*_{ab} |
|------------------|------------|------------|------------|------------|------------|
| O _{Ma} | 43.8 | 53.91 | 39.75 | 66.98 | 36 |
| Y _{Ma} | 87.58 | -4.65 | 98.29 | 98.4 | 93 |
| L _{Ma} | 51.95 | -56.34 | 43.53 | 71.2 | 142 |
| C _{Ma} | 59.62 | -26.2 | -28.62 | 38.8 | 228 |
| V _{Ma} | 25.01 | 45.2 | -52.8 | 69.51 | 311 |
| M _{Ma} | 45.88 | 70.67 | -29.93 | 76.75 | 337 |
| N _{Ma} | 20.0 | 0.0 | 0.0 | 0.0 | 0 |
| W _{Ma} | 95.0 | 0.0 | 0.0 | 0.0 | 0 |
| R _{CIE} | 39.92 | 58.74 | 27.99 | 65.07 | 25 |
| J _{CIE} | 81.26 | -2.89 | 71.56 | 71.62 | 92 |
| G _{CIE} | 52.23 | -42.42 | 13.6 | 44.55 | 162 |
| B _{CIE} | 30.57 | 1.41 | -46.47 | 46.49 | 272 |

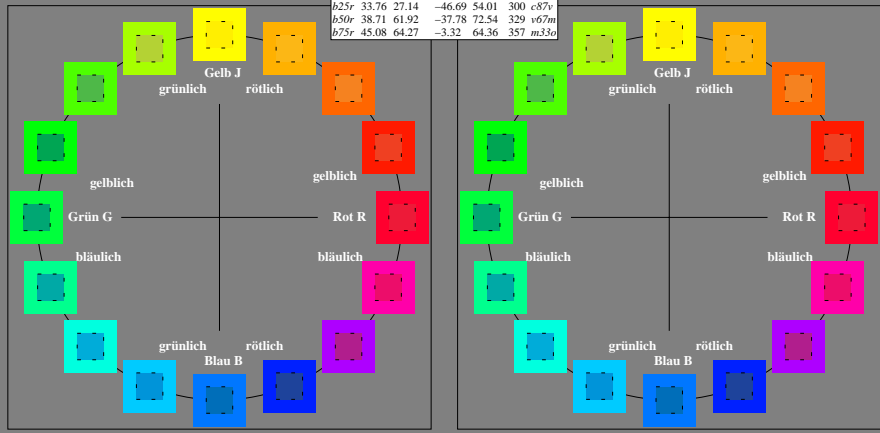

Stiche ähnliche Dateien: <http://www.ps.bam.de/Fg65/>; www.ps.bam.de/Fg/HTML
 Technische Information: <http://www.ps.bam.de> Version 2.1, 10-1.1, Col5px=0

BAM-Registrierung: 2008/001-Fg65/L65g00N1.TXT/.PS
 Anwendung für Beurteilung und Messung von Drucker- oder Monitorsystemen
 BAM-Material-Code=rhadtta