
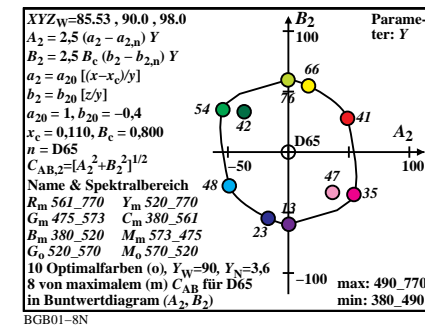
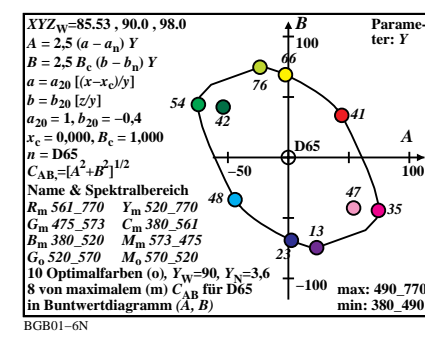
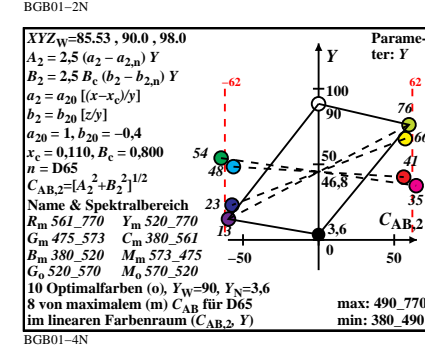
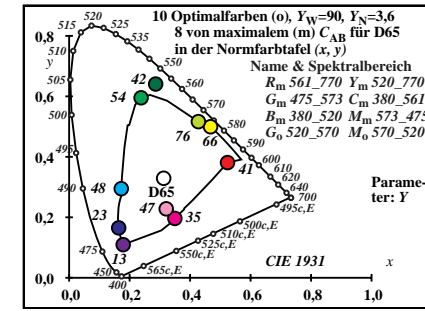
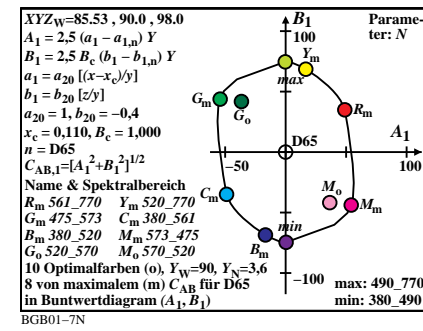
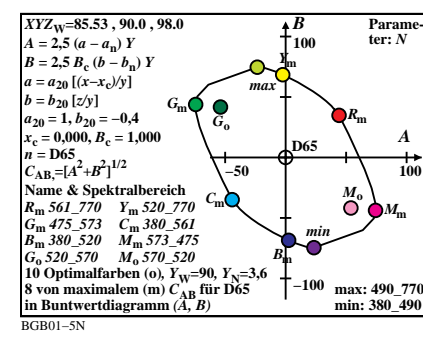
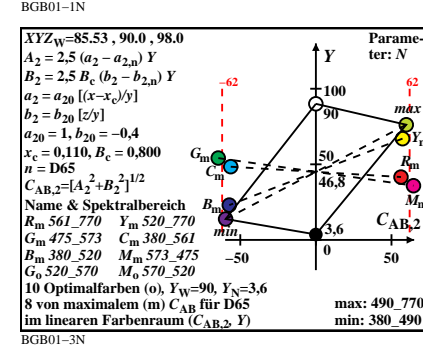


Ostwald-Optimalfarben (o), maximales (m) C_{AB} für D65, Y_N=3,6, Y_W=90, Y_m=520_770

| i ₁ , λ ₁ | i ₂ , λ ₂ | X | Y | Z | x | y | z | h _{xy} | i _d , λ _d | i _c , λ _c | Code |
|---------------------------------|---------------------------------|-----|-------|-------|-------|--------|--------|-----------------|---------------------------------|---------------------------------|-------------------|
| 0 | 405 | 32 | 561 | 28.34 | 48.4 | 87.6 | 0.1724 | 0.2945 | 0.533 | 193.8 | 16 483 37 589 Cm |
| 6 | 435 | 32 | 562 | 25.69 | 48.95 | 72.52 | 0.1746 | 0.3326 | 0.4927 | 178.5 | 17 486 42 610 |
| 10 | 450 | 32 | 563 | 21.01 | 49.59 | 44.25 | 0.1829 | 0.4317 | 0.3852 | 141.6 | 19 496 -1 496c |
| 12 | 460 | 33 | 565 | 19.15 | 49.94 | 29.98 | 0.1933 | 0.504 | 0.3026 | 124.2 | 21 505 -1 505c |
| 12 | 465 | 33 | 567 | 20.12 | 51.15 | 29.99 | 0.1987 | 0.5051 | 0.2961 | 122.8 | 21 506 -1 506c |
| 14 | 470 | 33 | 569 | 19.94 | 52.23 | 19.06 | 0.2186 | 0.5724 | 0.2089 | 111.1 | 24 520 -1 520c |
| 15 | 475 | 34 | 573 | 21.65 | 54.1 | 15.12 | 0.2382 | 0.5953 | 0.1664 | 105.6 | 25 528 -1 528c Gm |
| 16 | 480 | 36 | 580 | 25.4 | 57.45 | 12.12 | 0.2674 | 0.6048 | 0.1276 | 99.2 | 27 537 -1 537c |
| 17 | 485 | 39 | 595 | 35.62 | 64.35 | 9.93 | 0.3241 | 0.5855 | 0.0903 | 87.4 | 29 548 -1 548c |
| 18 | 490 | -1 | 490c | 63.02 | 76.18 | 8.3 | 0.4272 | 0.5164 | 0.0562 | 58.5 | 33 565 11 459 max |
| 19 | 495 | -1 | 495c | 62.98 | 75.01 | 7.04 | 0.4342 | 0.5171 | 0.0485 | 57.1 | 33 566 12 462 |
| 20 | 500 | -1 | 500c | 62.97 | 73.55 | 6.07 | 0.4416 | 0.5158 | 0.0425 | 55.3 | 33 567 12 464 |
| 22 | 510 | -1 | 510c | 62.87 | 69.55 | 4.8 | 0.4581 | 0.5068 | 0.035 | 50.6 | 33 569 13 469 |
| 23 | 520 | -1 | 519c | 62.69 | 66.99 | 4.43 | 0.4674 | 0.4995 | 0.033 | 47.7 | 34 570 14 471 Ym |
| 25 | 530 | -1 | 529c | 61.81 | 60.81 | 3.97 | 0.4882 | 0.4803 | 0.0314 | 40.7 | 34 573 15 475 |
| 27 | 540 | -1 | 539c | 60.05 | 53.7 | 3.73 | 0.511 | 0.4571 | 0.0318 | 32.8 | 35 577 15 478 |
| 28 | 545 | -1 | 544c | 58.8 | 49.99 | 3.67 | 0.5228 | 0.4445 | 0.0326 | 28.7 | 35 579 15 479 |
| 29 | 550 | -1 | 549c | 57.28 | 46.21 | 3.62 | 0.5347 | 0.4313 | 0.0338 | 24.7 | 36 582 16 480 |
| 30 | 555 | -1 | 554c | 55.49 | 42.43 | 3.6 | 0.5465 | 0.4179 | 0.0354 | 20.8 | 36 584 16 481 |
| 32 | 560 | -1 | 560c | 51.12 | 35.12 | 3.57 | 0.5691 | 0.391 | 0.0397 | 13.6 | 37 589 16 483 |
| 32 | 561 | 0 | 405 | 57.19 | 41.59 | 10.39 | 0.5238 | 0.3809 | 0.0951 | 13.8 | 37 589 16 483 Rm |
| 32 | 562 | 6 | 435 | 59.84 | 41.04 | 25.47 | 0.4735 | 0.3248 | 0.2016 | 358.5 | 42 610 17 486 |
| 32 | 563 | 10 | 450 | 64.52 | 40.4 | 53.74 | 0.4066 | 0.2546 | 0.3387 | 321.6 | -1 496c 19 496 |
| 33 | 565 | 12 | 460 | 66.38 | 40.05 | 68.01 | 0.3805 | 0.2295 | 0.3898 | 304.3 | -1 505c 21 505 |
| 33 | 567 | 12 | 465 | 65.41 | 38.84 | 68.01 | 0.3797 | 0.2254 | 0.3947 | 302.9 | -1 506c 21 506 |
| 33 | 569 | 14 | 470 | 65.59 | 37.76 | 78.93 | 0.3598 | 0.2071 | 0.433 | 291.1 | -1 520c 24 520 |
| 34 | 573 | 15 | 475 | 63.88 | 35.89 | 82.87 | 0.3497 | 0.1964 | 0.4537 | 285.6 | -1 528c 25 528 Mm |
| 36 | 580 | 16 | 480 | 60.13 | 32.54 | 85.87 | 0.3367 | 0.1822 | 0.4809 | 279.3 | -1 537c 27 537 |
| 39 | 595 | 17 | 485 | 49.91 | 25.64 | 88.06 | 0.305 | 0.1567 | 0.5382 | 267.4 | -1 548c 29 548 |
| -1 | 490c | 18 | 490 | 22.51 | 13.81 | 89.7 | 0.1786 | 0.1096 | 0.7117 | 238.5 | 11 459 33 565 min |
| -1 | 495c | 19 | 495 | 22.55 | 14.98 | 90.95 | 0.1755 | 0.1166 | 0.7078 | 237.1 | 12 462 33 566 |
| -1 | 500c | 20 | 500 | 22.56 | 16.44 | 91.92 | 0.1723 | 0.1256 | 0.702 | 235.4 | 12 464 33 567 |
| -1 | 510c | 22 | 510 | 22.66 | 20.44 | 93.19 | 0.1662 | 0.1499 | 0.6837 | 230.7 | 13 469 33 569 |
| -1 | 519c | 23 | 520 | 22.84 | 23.0 | 93.56 | 0.1638 | 0.165 | 0.6711 | 227.7 | 14 471 34 570 Bm |
| -1 | 529c | 25 | 530 | 23.72 | 29.18 | 94.02 | 0.1614 | 0.1986 | 0.6399 | 220.7 | 15 475 34 573 |
| -1 | 539c | 27 | 540 | 25.48 | 36.29 | 94.26 | 0.1633 | 0.2325 | 0.604 | 212.8 | 15 478 35 577 |
| -1 | 544c | 28 | 545 | 26.73 | 40.0 | 94.33 | 0.1659 | 0.2483 | 0.5856 | 208.8 | 15 479 35 579 |
| -1 | 549c | 29 | 550 | 28.25 | 43.78 | 94.37 | 0.1697 | 0.2631 | 0.567 | 204.7 | 16 480 36 582 |
| -1 | 554c | 30 | 555 | 30.04 | 47.56 | 94.4 | 0.1746 | 0.2765 | 0.5488 | 200.8 | 16 481 36 584 |
| -1 | 560c | 32 | 560 | 34.41 | 54.87 | 94.43 | 0.1873 | 0.2986 | 0.5139 | 193.6 | 16 483 37 589 |
| W0 | 380 | 770 | 85.53 | 90.0 | 98.0 | 0.3127 | 0.329 | 0.3582 | 0.0 | | |
| N0 | 380 | 770 | 3.42 | 3.6 | 3.92 | 0.3127 | 0.329 | 0.3582 | 0.0 | | |

Siehe ähnliche Dateien: http://farbe.li.tu-berlin.de/BGB0/BGB0LONA.TXT /PS
 Technische Information: http://farbe.li.tu-berlin.de oder http://color.li.tu-berlin.de

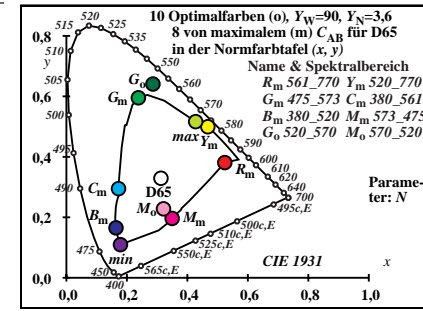

TUB-Registrierung: 20221101-BGB0/BGB0LONA.TXT /PS
 Anwendung für Beurteilung und Messung von Display- oder Druck-Ausgabe
 TUB-Material: Code=rh4ta