
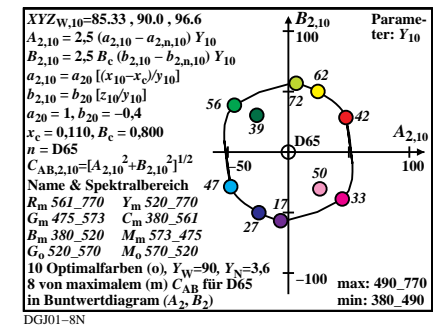
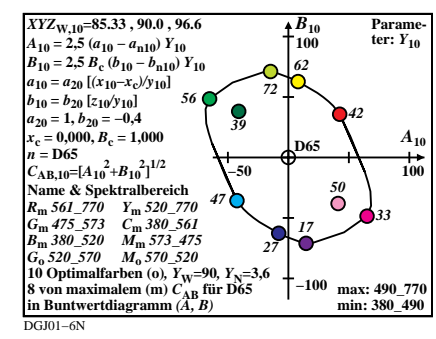
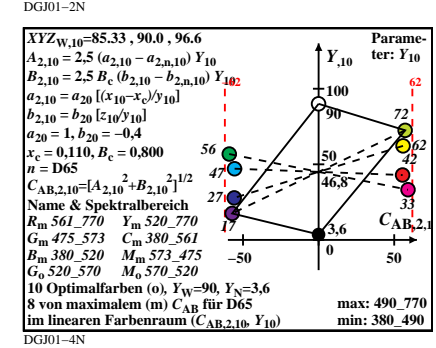
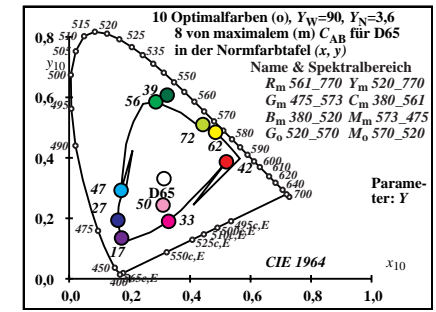
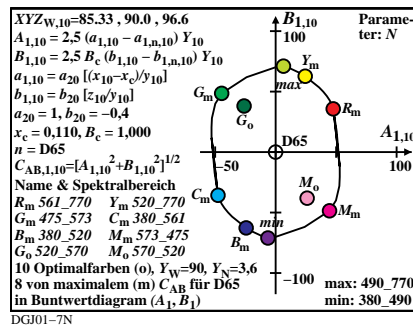
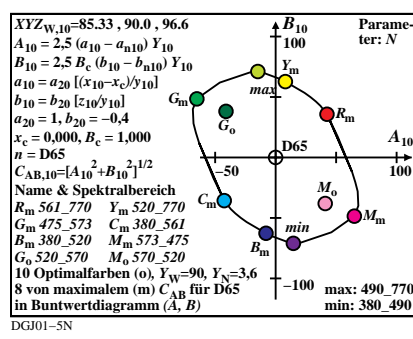
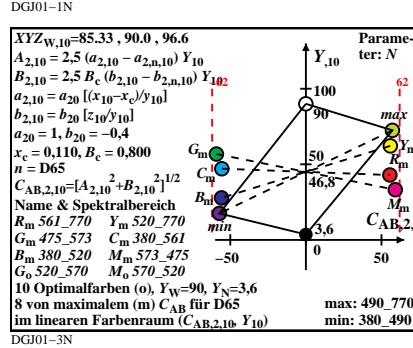


**Ostwald-Optimalfarben (o), maximales (m)  $C_{AB,10}$  für D65,  $Y_N,10=3,6$ ,  $Y_W,10=90$ ,  $Y_m=520_770$**

$i_1, \lambda_1$	$i_2, \lambda_2$	$X_{10}$	$Y_{10}$	$Z_{10}$	$x_{10}$	$y_{10}$	$z_{10}$	$h_{xy,10}$	$i_d, \lambda_d$	$i_c, \lambda_c$	Code
0	405	31	556	27.66	47.1	86.31	0.1717	0.2924	0.5358	195.1	15 476 37 585 Cm
6	435	31	557	24.87	47.93	68.5	0.176	0.3391	0.4847	176.5	16 480 44 621
10	450	31	559	20.39	48.21	39.65	0.1883	0.4453	0.3662	137.6	18 492 -1 492c
11	460	32	562	20.41	49.33	32.48	0.1996	0.4825	0.3177	126.9	19 498 -1 498c
12	465	33	565	20.63	50.4	26.01	0.2126	0.5193	0.268	118.2	21 506 -1 506c
14	470	34	570	22.02	52.1	15.93	0.2445	0.5785	0.1769	105.6	24 522 -1 522c
15	475	35	579	27.8	56.8	12.45	0.2864	0.5852	0.1282	96.1	26 534 -1 534c Gm
16	480	41	606	44.97	66.9	9.88	0.3693	0.5494	0.0811	75.6	30 550 -1 550c
16	485	-1	484c	62.99	75.01	9.88	0.4259	0.5072	0.0668	57.5	32 560 10 454
18	490	-1	490c	62.84	72.49	6.74	0.4423	0.5102	0.0474	54.3	32 562 11 459 max
19	495	-1	495c	62.83	70.93	5.79	0.4502	0.5082	0.0415	52.4	32 563 12 461
19	500	-1	499c	62.83	70.93	5.79	0.4502	0.5082	0.0415	52.4	32 563 12 461
22	510	-1	510c	62.5	64.74	4.26	0.4752	0.4923	0.0324	44.9	33 566 13 466
23	520	-1	519c	62.17	62.19	4.01	0.4842	0.4844	0.0312	41.9	33 568 13 468 Ym
26	530	-1	530c	59.95	53.14	3.6	0.5137	0.4553	0.0309	31.8	34 573 14 472
27	540	-1	539c	58.76	49.82	3.54	0.524	0.4443	0.0316	28.3	35 576 14 473
28	545	-1	544c	57.31	46.42	3.5	0.5343	0.4328	0.0327	24.7	35 578 14 474
29	550	-1	549c	55.6	42.99	3.48	0.5447	0.4211	0.0341	21.3	36 580 15 475
31	555	-1	555c	51.4	36.18	3.47	0.5644	0.3973	0.0381	14.8	37 586 15 476
32	560	10	451	57.83	34.36	48.64	0.4106	0.2439	0.3453	318.1	-1 491c 18 491
31	556	0	405	57.66	42.89	10.28	0.5202	0.3869	0.0927	15.1	37 585 15 476 Rm
31	557	6	435	60.45	42.06	28.09	0.4628	0.322	0.215	356.5	44 621 16 480
31	559	10	450	64.93	41.78	56.94	0.3967	0.2553	0.3479	317.6	-1 492c 18 492
32	562	11	460	64.91	40.66	64.11	0.3825	0.2396	0.3778	307.0	-1 498c 19 498
33	565	12	465	64.69	39.59	70.58	0.3699	0.2264	0.4036	298.2	-1 506c 21 506
34	570	14	470	63.31	37.89	80.66	0.348	0.2083	0.4435	285.6	-1 522c 24 522
35	579	15	475	57.52	33.19	84.15	0.3289	0.1898	0.4812	276.1	-1 534c 26 534 Mm
41	606	16	480	40.35	23.09	86.71	0.2687	0.1537	0.5774	255.7	-1 550c 30 550
-1	484c	16	485	22.33	14.98	86.71	0.18	0.1208	0.699	237.5	10 454 32 560
-1	490c	18	490	22.48	17.5	89.85	0.1731	0.1348	0.692	234.3	11 459 32 562 min
-1	495c	19	495	22.5	19.06	90.8	0.1699	0.144	0.6859	232.4	12 461 32 563
-1	499c	19	500	22.5	19.06	90.8	0.1699	0.144	0.6859	232.4	12 461 32 563
-1	510c	22	510	22.82	25.25	92.33	0.1625	0.1798	0.6576	225.0	13 466 33 566
-1	519c	23	520	23.15	27.8	92.58	0.1613	0.1936	0.6449	222.0	13 468 33 568 Bm
-1	530c	26	530	25.37	36.85	92.99	0.1634	0.2374	0.599	211.8	14 472 34 573
-1	539c	27	540	26.57	40.17	93.05	0.1662	0.2514	0.5823	208.3	14 473 35 576
-1	544c	28	545	28.01	43.57	93.09	0.1701	0.2645	0.5652	204.8	14 474 35 578
-1	549c	29	550	29.72	47.0	93.11	0.175	0.2767	0.5482	201.3	15 475 36 580
-1	555c	31	555	33.92	53.81	93.12	0.1875	0.2975	0.5148	194.8	15 476 37 586
10	451	32	560	27.49	55.63	47.96	0.2097	0.4244	0.3658	138.0	18 491 -1 491c
W0	380	770	85.33	90.0	96.6	0.3137	0.3309	0.3552	0.0		
NO	380	770	3.41	3.6	3.86	0.3137	0.3309	0.3552	0.0		

Siehe ähnliche Dateien: <http://farbe.li.tu-berlin.de/DGJ0/DGJ0L0NP.PDF> /PS  
 Technische Information: <http://farbe.li.tu-berlin.de> oder <http://color.li.tu-berlin.de>

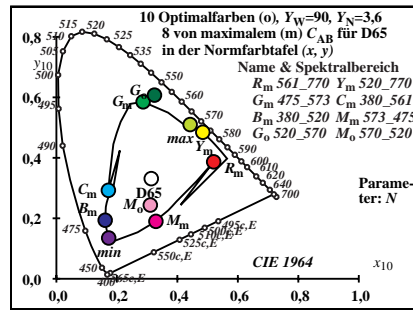

TUB-Registrierung: 20221101-DGJ0/DGJ0L0NP.PDF /PS  
 Anwendung für Beurteilung und Messung von Display- oder Druck-Ausgabe  
 TUB-Material: Code=rh4ta