

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB

TUB registration: 20110801-OE80/OE80L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=rhadata

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*
1	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.07	6.36	0.01
3	12.72	0.0	0.13	12.72	0.01
4	19.08	0.0	0.2	19.08	0.01
5	25.44	0.0	0.27	25.44	0.01
6	31.8	0.0	0.33	31.8	0.01
7	38.16	0.0	0.4	38.16	0.01
8	44.52	0.0	0.47	44.52	0.01
9	50.89	0.0	0.53	50.89	0.01
10	57.25	0.0	0.6	57.25	0.01
11	63.61	0.0	0.67	63.61	0.01
12	69.97	0.0	0.73	69.97	0.01
13	76.33	0.0	0.8	76.33	0.01
14	82.69	0.0	0.87	82.69	0.01
15	89.05	0.0	0.93	89.05	0.01
16	95.41	0.0	1.0	95.41	0.01
17	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.25	23.85	0.01
19	47.71	0.0	0.5	47.71	0.01
20	71.56	0.0	0.75	71.56	0.01
21	95.41	0.0	1.0	95.41	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIE LAB} = 0.0$

Mean lightness difference (5 steps) $\Delta L^*_{CIE LAB} = 0.0$

Mean colour reproduction index: $R^*_{ab,m} = 100$

OE800-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

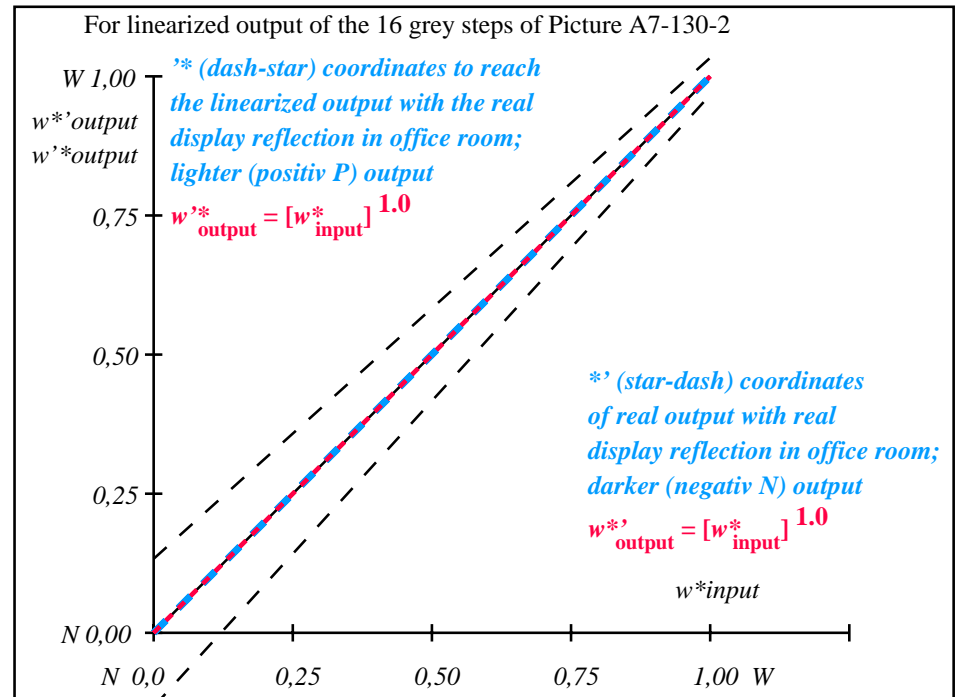

OE801-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
$w^* w^* w^*$ setrgb																
gp=1.0																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIE LAB, r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0

OE800-7N, Picture A7-130-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE80: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

input: $rgb (-> rgb^*_{de})$ setrgbcolor
 output 130-2: $g_P=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB

TUB registration: 20110801-OE80/OE80L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=thadata

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	5.69 0.0 0.0	0.0 0.0	5.69 0.0 0.0	0.0 0.0 0.0	0.01
2	11.67 0.0 0.0	0.08 13.02 0.0	0.0 0.0 0.0	1.35 0.0 0.0	1.35
3	17.65 0.0 0.0	0.16 19.6 0.0	0.0 0.0 0.0	1.95 0.0 0.0	1.95
4	23.63 0.0 0.0	0.23 25.94 0.0	0.0 0.0 0.0	2.3 0.0 0.0	2.3
5	29.62 0.0 0.0	0.29 32.11 0.0	0.0 0.0 0.0	2.49 0.0 0.0	2.49
6	35.6 0.0 0.0	0.36 38.17 0.0	0.0 0.0 0.0	2.57 0.0 0.0	2.57
7	41.58 0.0 0.0	0.43 44.13 0.0	0.0 0.0 0.0	2.55 0.0 0.0	2.55
8	47.56 0.0 0.0	0.49 50.02 0.0	0.0 0.0 0.0	2.46 0.0 0.0	2.46
9	53.54 0.0 0.0	0.56 55.85 0.0	0.0 0.0 0.0	2.31 0.0 0.0	2.31
10	59.52 0.0 0.0	0.62 61.62 0.0	0.0 0.0 0.0	2.1 0.0 0.0	2.1
11	65.5 0.0 0.0	0.69 67.35 0.0	0.0 0.0 0.0	1.85 0.0 0.0	1.85
12	71.48 0.0 0.0	0.75 73.03 0.0	0.0 0.0 0.0	1.55 0.0 0.0	1.55
13	77.47 0.0 0.0	0.81 78.68 0.0	0.0 0.0 0.0	1.21 0.0 0.0	1.21
14	83.45 0.0 0.0	0.88 84.29 0.0	0.0 0.0 0.0	0.84 0.0 0.0	0.84
15	89.43 0.0 0.0	0.94 89.86 0.0	0.0 0.0 0.0	0.43 0.0 0.0	0.43
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	5.69 0.0 0.0	0.0 5.69 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	28.12 0.0 0.0	0.28 30.58 0.0	0.0 0.0 0.0	2.46 0.0 0.0	2.46
19	50.55 0.0 0.0	0.53 52.94 0.0	0.0 0.0 0.0	2.39 0.0 0.0	2.39
20	72.98 0.0 0.0	0.77 74.45 0.0	0.0 0.0 0.0	1.47 0.0 0.0	1.47
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIE LAB} = 1.6$

Mean lightness difference (5 steps) $\Delta L^*_{CIE LAB} = 1.3$

Mean colour reproduction index: $R^*_{ab,m} = 93$

OE800-3N-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

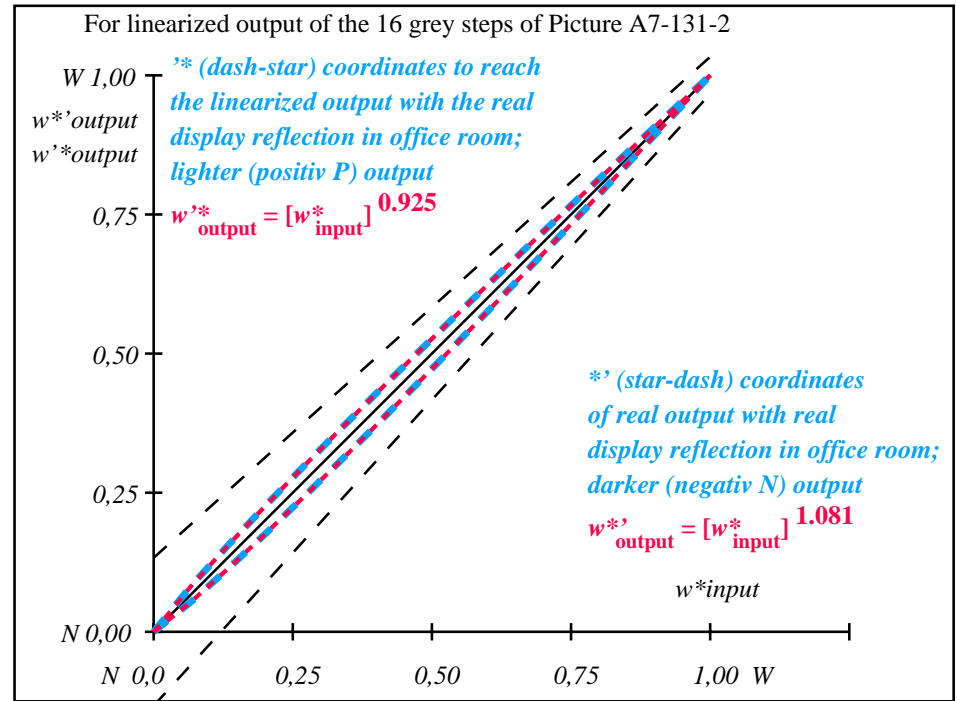

OE801-3N-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	5.7/0.6	11.7/1.4	17.7/2.4	23.6/4.0	29.6/6.1	35.6/8.8	41.6/12.2	47.6/16.5	53.5/21.5	59.5/27.6	65.5/34.7	71.5/42.9	77.5/52.3	83.4/63.0	89.4/75.1	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_P=0.92$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIE LAB, r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,082	0,155	0,226	0,295	0,362	0,428	0,494	0,559	0,623	0,688	0,75	0,814	0,876	0,938	1,0

OE800-7N, Picture A7-131-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE80: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:0,62$; Y_N range 0,46 to <0,93

input: $rgb (-> rgb^*_{de})$ setrgbcolor
 output 131-2: $g_P=0.92$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB

TUB registration: 20110801-OE80/OE80L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=thadata

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*	
1	10.99	0.0	0.0	0.0	0.01	
2	16.62	0.0	0.1	19.44	0.0	2.82
3	22.25	0.0	0.18	26.22	0.0	3.97
4	27.88	0.0	0.25	32.49	0.0	4.61
5	33.5	0.0	0.33	38.44	0.0	4.94
6	39.13	0.0	0.39	44.17	0.0	5.04
7	44.76	0.0	0.46	49.73	0.0	4.98
8	50.39	0.0	0.52	55.16	0.0	4.77
9	56.02	0.0	0.59	60.47	0.0	4.45
10	61.64	0.0	0.65	65.68	0.0	4.03
11	67.27	0.0	0.71	70.8	0.0	3.53
12	72.9	0.0	0.77	75.85	0.0	2.95
13	78.53	0.0	0.83	80.83	0.0	2.3
14	84.15	0.0	0.89	85.74	0.0	1.59
15	89.78	0.0	0.94	90.6	0.0	0.82
16	95.41	0.0	1.0	95.41	0.0	0.01
17	10.99	0.0	0.0	10.99	0.0	0.01
18	32.1	0.0	0.31	36.98	0.0	4.88
19	53.2	0.0	0.55	57.83	0.0	4.62
20	74.31	0.0	0.78	77.1	0.0	2.79
21	95.41	0.0	1.0	95.41	0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIE LAB} = 3.2$

Mean lightness difference (5 steps) $\Delta L^*_{CIE LAB} = 2.5$

Mean colour reproduction index: $R^*_{ab,m} = 86$

OE800-3N-132-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

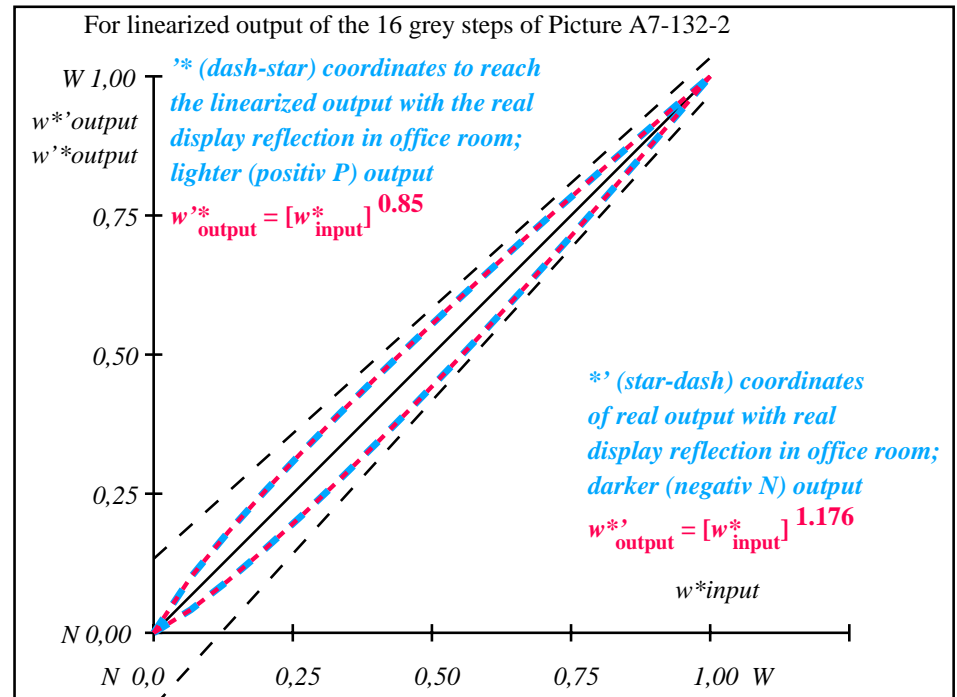

OE801-3N-132-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	11.0/1.3	16.6/2.2	22.2/3.6	27.9/5.4	33.5/7.8	39.1/10.7	44.8/14.4	50.4/18.7	56.0/23.9	61.6/30.0	67.3/37.0	72.9/45.0	78.5/54.1	84.2/64.4	89.8/75.8	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_P=0.85$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*$ CIE LAB, r (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0.0	0.1	0.18	0.255	0.325	0.393	0.459	0.524	0.586	0.648	0.709	0.768	0.827	0.886	0.943	1.0

OE800-7N, Picture A7-132-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE80: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:1,25$; Y_N range 0,93 to <1,87

input: $rgb (-> rgb^*_{de})$ setrgbcolor
 output 132-2: $g_P=0.85$; $g_N=1.0$


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB

TUB registration: 20110801-OE80/OE80L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=rhadata


i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*	Start output S1
1	18.01 0.0 0.0	0.0 18.01 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
2	23.17 0.0 0.0	0.12 27.5 0.0	0.0 0.0 0.0	4.33 0.0 0.0	4.33	
3	28.33 0.0 0.0	0.21 34.25 0.0	0.0 0.0 0.0	5.92 0.0 0.0	5.92	
4	33.49 0.0 0.0	0.29 40.24 0.0	0.0 0.0 0.0	6.76 0.0 0.0	6.76	
5	38.65 0.0 0.0	0.36 45.8 0.0	0.0 0.0 0.0	7.15 0.0 0.0	7.15	
6	43.81 0.0 0.0	0.43 51.04 0.0	0.0 0.0 0.0	7.23 0.0 0.0	7.23	
7	48.97 0.0 0.0	0.49 56.06 0.0	0.0 0.0 0.0	7.09 0.0 0.0	7.09	
8	54.13 0.0 0.0	0.55 60.89 0.0	0.0 0.0 0.0	6.76 0.0 0.0	6.76	
9	59.29 0.0 0.0	0.61 65.56 0.0	0.0 0.0 0.0	6.27 0.0 0.0	6.27	
10	64.45 0.0 0.0	0.67 70.11 0.0	0.0 0.0 0.0	5.66 0.0 0.0	5.66	
11	69.61 0.0 0.0	0.73 74.54 0.0	0.0 0.0 0.0	4.93 0.0 0.0	4.93	
12	74.77 0.0 0.0	0.79 78.87 0.0	0.0 0.0 0.0	4.1 0.0 0.0	4.1	
13	79.93 0.0 0.0	0.84 83.12 0.0	0.0 0.0 0.0	3.19 0.0 0.0	3.19	
14	85.09 0.0 0.0	0.9 87.28 0.0	0.0 0.0 0.0	2.19 0.0 0.0	2.2	
15	90.25 0.0 0.0	0.95 91.38 0.0	0.0 0.0 0.0	1.13 0.0 0.0	1.13	Mean lightness difference (16 steps)
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta E^*_{CIE LAB} = 4.5$
17	18.01 0.0 0.0	0.0 18.01 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01	
18	37.36 0.0 0.0	0.34 44.44 0.0	0.0 0.0 0.0	7.08 0.0 0.0	7.08	
19	56.71 0.0 0.0	0.58 63.24 0.0	0.0 0.0 0.0	6.53 0.0 0.0	6.53	
20	76.06 0.0 0.0	0.8 79.94 0.0	0.0 0.0 0.0	3.88 0.0 0.0	3.88	Mean lightness difference (5 steps)
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01	$\Delta L^*_{CIE LAB} = 3.5$

Mean colour reproduction index: $R^*_{ab,m} = 80$

OE800-3N-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

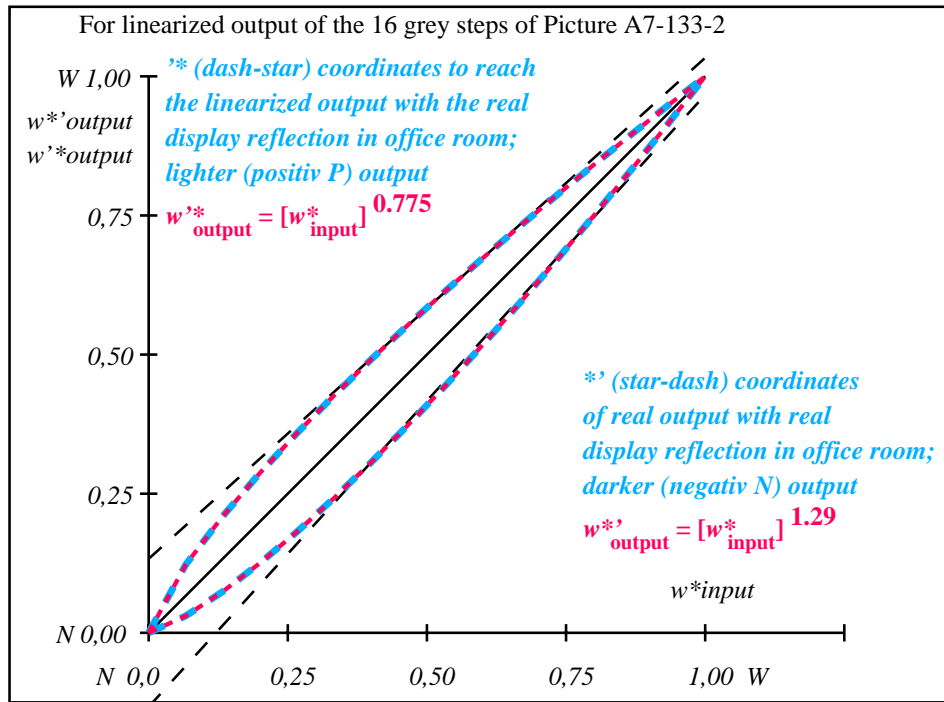

OE801-3N-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

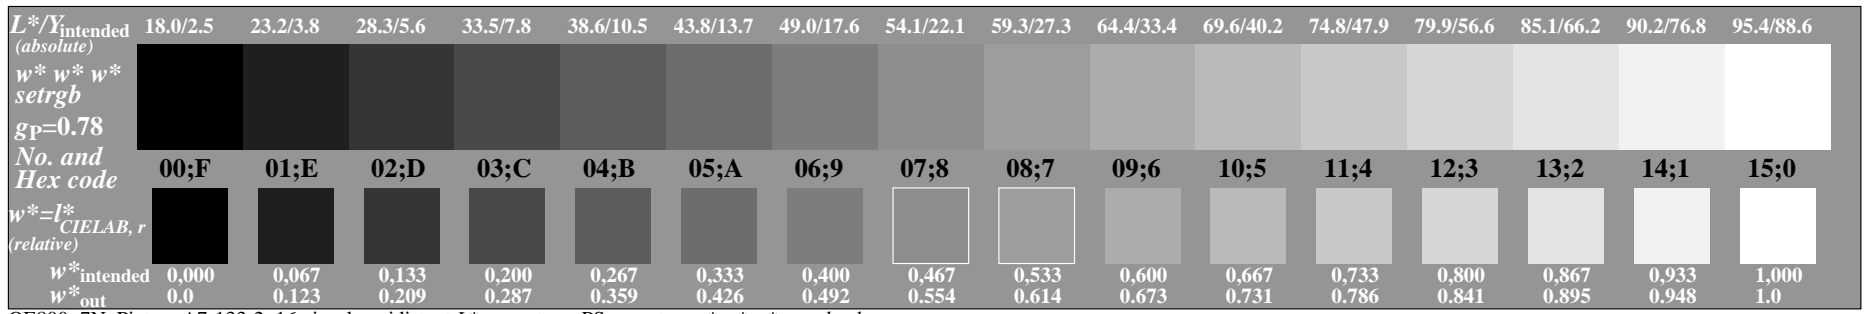

OE800-7N, Picture A7-133-2: 16 visual equidistant L*-grey steps; PS operator: $w^* w^* w^* setrgbcolor$

OE80: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:2,5$; Y_N range 1,87 to <3,75

input: $rgb (-> rgb^*_{de}) setrgbcolor$
 output 133-2: $g_P=0.77$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB


TUB registration: 20110801-OE80/OE80L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=thadata

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*
1	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.01	
2	31.42 0.0 0.0	0.15 37.15 0.0	0.0 5.73 0.0	5.73	
3	35.99 0.0 0.0	0.24 43.58 0.0	0.0 7.59 0.0	7.59	
4	40.56 0.0 0.0	0.32 49.07 0.0	0.0 8.51 0.0	8.51	
5	45.13 0.0 0.0	0.4 54.03 0.0	0.0 8.9 0.0	8.9	
6	49.7 0.0 0.0	0.46 58.62 0.0	0.0 8.92 0.0	8.92	
7	54.27 0.0 0.0	0.53 62.95 0.0	0.0 8.68 0.0	8.68	
8	58.84 0.0 0.0	0.59 67.06 0.0	0.0 8.22 0.0	8.22	
9	63.41 0.0 0.0	0.64 71.0 0.0	0.0 7.59 0.0	7.59	
10	67.99 0.0 0.0	0.7 74.8 0.0	0.0 6.81 0.0	6.81	
11	72.56 0.0 0.0	0.75 78.47 0.0	0.0 5.91 0.0	5.91	
12	77.13 0.0 0.0	0.8 82.03 0.0	0.0 4.9 0.0	4.9	
13	81.7 0.0 0.0	0.86 85.5 0.0	0.0 3.8 0.0	3.8	
14	86.27 0.0 0.0	0.9 88.87 0.0	0.0 2.61 0.0	2.61	
15	90.84 0.0 0.0	0.95 92.18 0.0	0.0 1.34 0.0	1.34	
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.01	
17	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.01	
18	43.99 0.0 0.0	0.38 52.83 0.0	0.0 8.84 0.0	8.84	
19	61.13 0.0 0.0	0.62 69.05 0.0	0.0 7.92 0.0	7.92	
20	78.27 0.0 0.0	0.82 82.9 0.0	0.0 4.64 0.0	4.64	
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.01	

Mean lightness difference (16 steps) $\Delta E^*_{CIE LAB} = 5.6$
 Mean lightness difference (5 steps) $\Delta L^*_{CIE LAB} = 4.3$
 Mean colour reproduction index: $R^*_{ab,m} = 76$

OE800-3N-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

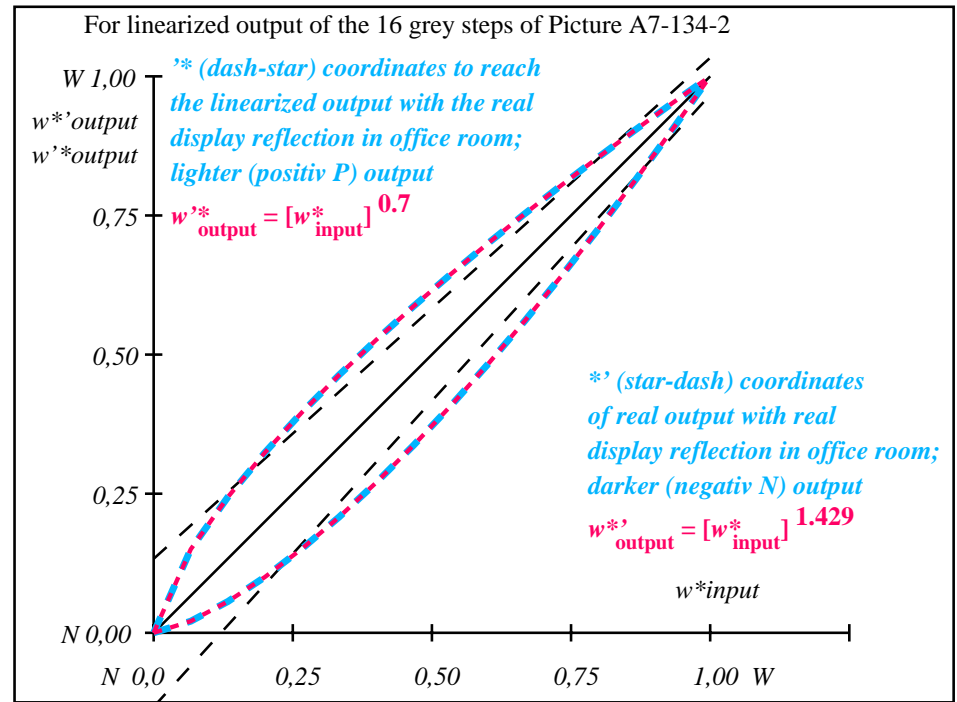

OE801-3N-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	26.8/5.0	31.4/6.8	36.0/9.0	40.6/11.6	45.1/14.6	49.7/18.2	54.3/22.2	58.8/26.9	63.4/32.1	68.0/38.0	72.6/44.5	77.1/51.7	81.7/59.7	86.3/68.5	90.8/78.1	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_P=0.7$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIE LAB, r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,151	0,244	0,324	0,397	0,463	0,527	0,587	0,644	0,699	0,753	0,805	0,855	0,905	0,953	1,0

OE800-7N, Picture A7-134-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE80: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:5$; Y_N range 3,75 to <7,5

input: $rgb \rightarrow rgb^*_{de}$ setrgbcolor
 output 134-2: $g_P=0.7$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE80/OE80L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=thadata

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	37.99 0.0 0.0	0.0 0.0 0.0	37.99 0.0 0.0	0.0 0.0 0.0	0.01
2	41.81 0.0 0.0	0.18 48.55 0.0	48.55 0.0 0.0	6.74 0.0 0.0	6.74
3	45.64 0.0 0.0	0.28 54.29 0.0	54.29 0.0 0.0	8.64 0.0 0.0	8.64
4	49.47 0.0 0.0	0.37 58.99 0.0	58.99 0.0 0.0	9.52 0.0 0.0	9.52
5	53.3 0.0 0.0	0.44 63.12 0.0	63.12 0.0 0.0	9.82 0.0 0.0	9.82
6	57.13 0.0 0.0	0.5 66.89 0.0	66.89 0.0 0.0	9.76 0.0 0.0	9.76
7	60.96 0.0 0.0	0.56 70.37 0.0	70.37 0.0 0.0	9.42 0.0 0.0	9.42
8	64.78 0.0 0.0	0.62 73.65 0.0	73.65 0.0 0.0	8.87 0.0 0.0	8.87
9	68.61 0.0 0.0	0.68 76.75 0.0	76.75 0.0 0.0	8.14 0.0 0.0	8.14
10	72.44 0.0 0.0	0.73 79.71 0.0	79.71 0.0 0.0	7.27 0.0 0.0	7.27
11	76.27 0.0 0.0	0.78 82.56 0.0	82.56 0.0 0.0	6.29 0.0 0.0	6.29
12	80.1 0.0 0.0	0.82 85.29 0.0	85.29 0.0 0.0	5.19 0.0 0.0	5.19
13	83.93 0.0 0.0	0.87 87.93 0.0	87.93 0.0 0.0	4.01 0.0 0.0	4.01
14	87.75 0.0 0.0	0.91 90.5 0.0	90.5 0.0 0.0	2.74 0.0 0.0	2.74
15	91.58 0.0 0.0	0.96 92.99 0.0	92.99 0.0 0.0	1.4 0.0 0.0	1.4
16	95.41 0.0 0.0	1.0 95.41 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01
17	37.99 0.0 0.0	0.0 37.99 0.0	37.99 0.0 0.0	0.0 0.0 0.0	0.01
18	52.34 0.0 0.0	0.42 62.13 0.0	62.13 0.0 0.0	9.79 0.0 0.0	9.79
19	66.7 0.0 0.0	0.65 75.22 0.0	75.22 0.0 0.0	8.52 0.0 0.0	8.52
20	81.05 0.0 0.0	0.84 85.96 0.0	85.96 0.0 0.0	4.91 0.0 0.0	4.91
21	95.41 0.0 0.0	1.0 95.41 0.0	95.41 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIELAB} = 6.1$


Mean lightness difference (5 steps) $\Delta L^*_{CIELAB} = 4.6$

Mean colour reproduction index: $R^*_{ab,m} = 73$

OE800-3N-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

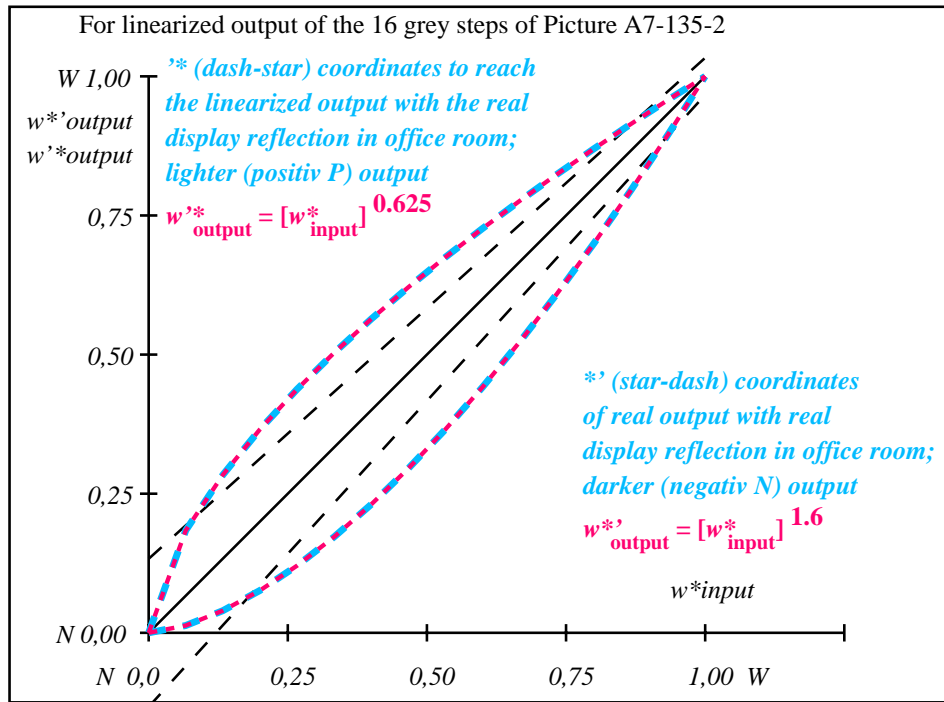

OE801-3N-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

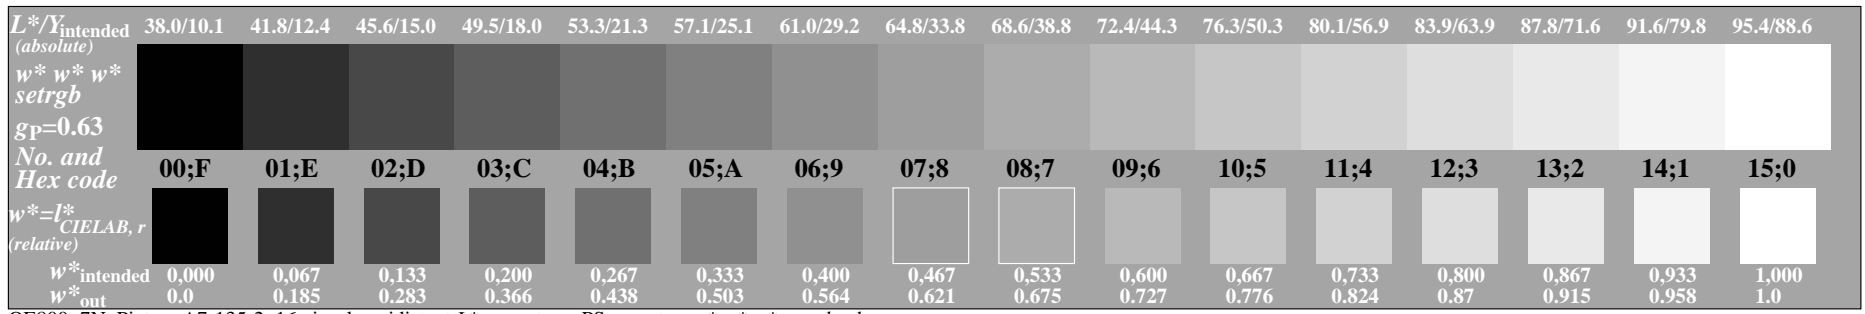

OE800-7N, Picture A7-135-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{setrgbcolor}$

OE80: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:10$; Y_N range 7,5 to <15
 input: $rgb (-> rgb^*_{de})_{setrgbcolor}$
 output 135-2: $g_P=0.62$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB

TUB registration: 20110801-OE80/OE80L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=thdata

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*
1	52.02 0.0 0.0	0.0 52.02 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	54.91 0.0 0.0	0.23 61.8 0.0	0.0 0.0 0.0	6.89 0.0 0.0	6.89
3	57.8 0.0 0.0	0.33 66.34 0.0	0.0 0.0 0.0	8.54 0.0 0.0	8.54
4	60.7 0.0 0.0	0.41 69.92 0.0	0.0 0.0 0.0	9.23 0.0 0.0	9.23
5	63.59 0.0 0.0	0.48 72.99 0.0	0.0 0.0 0.0	9.4 0.0 0.0	9.4
6	66.48 0.0 0.0	0.55 75.73 0.0	0.0 0.0 0.0	9.25 0.0 0.0	9.25
7	69.37 0.0 0.0	0.6 78.23 0.0	0.0 0.0 0.0	8.86 0.0 0.0	8.86
8	72.27 0.0 0.0	0.66 80.55 0.0	0.0 0.0 0.0	8.28 0.0 0.0	8.28
9	75.16 0.0 0.0	0.71 82.73 0.0	0.0 0.0 0.0	7.57 0.0 0.0	7.57
10	78.05 0.0 0.0	0.76 84.78 0.0	0.0 0.0 0.0	6.73 0.0 0.0	6.73
11	80.95 0.0 0.0	0.8 86.74 0.0	0.0 0.0 0.0	5.79 0.0 0.0	5.79
12	83.84 0.0 0.0	0.84 88.6 0.0	0.0 0.0 0.0	4.77 0.0 0.0	4.77
13	86.73 0.0 0.0	0.88 90.4 0.0	0.0 0.0 0.0	3.67 0.0 0.0	3.67
14	89.62 0.0 0.0	0.92 92.13 0.0	0.0 0.0 0.0	2.5 0.0 0.0	2.5
15	92.52 0.0 0.0	0.96 93.79 0.0	0.0 0.0 0.0	1.28 0.0 0.0	1.28
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	52.02 0.0 0.0	0.0 52.02 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	62.87 0.0 0.0	0.47 72.26 0.0	0.0 0.0 0.0	9.4 0.0 0.0	9.4
19	73.71 0.0 0.0	0.68 81.66 0.0	0.0 0.0 0.0	7.94 0.0 0.0	7.94
20	84.56 0.0 0.0	0.85 89.06 0.0	0.0 0.0 0.0	4.5 0.0 0.0	4.5
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIE LAB} = 5.8$


Mean lightness difference (5 steps) $\Delta L^*_{CIE LAB} = 4.4$

Mean colour reproduction index: $R^*_{ab,m} = 75$

OE800-3N-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

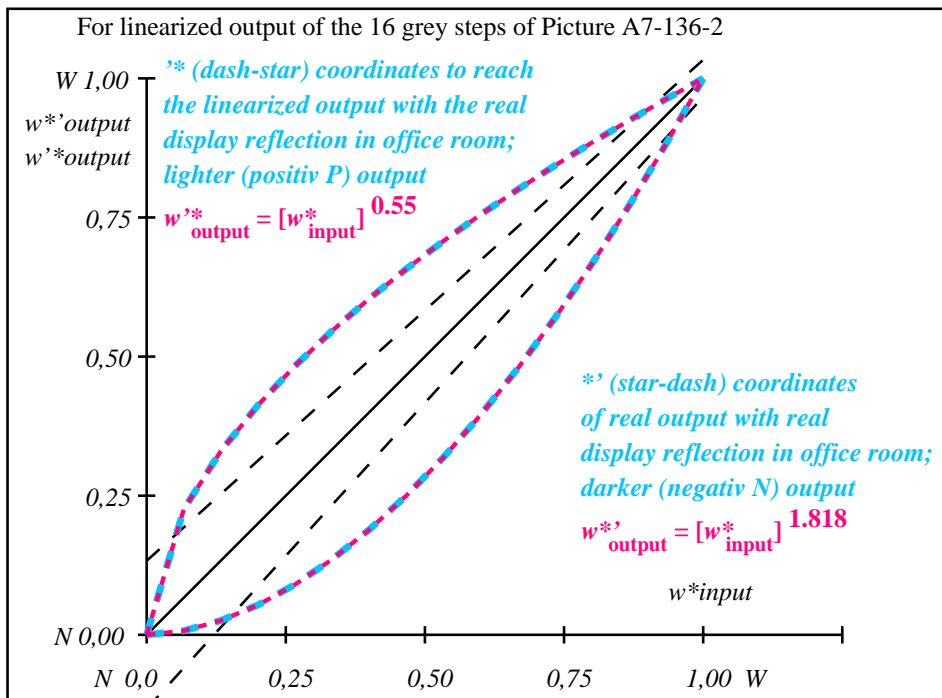

OE801-3N-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

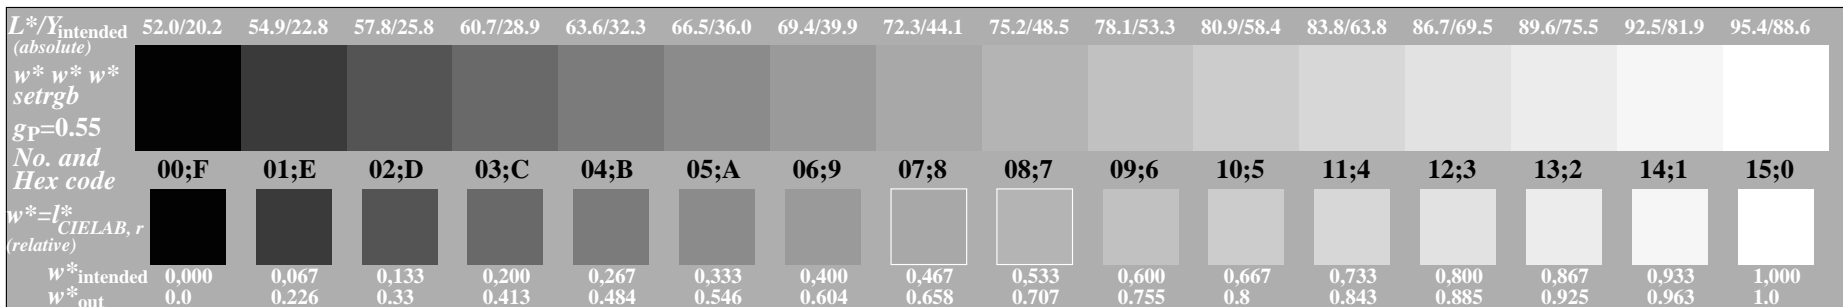

OE800-7N, Picture A7-136-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{setrgbcolor}$

OE80: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:20$; Y_N range 15 to <30

input: $rgb \rightarrow rgb^*_{de}$ $setrgbcolor$
 output 136-2: $g_P=0.55$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE80/OE80L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=thadata

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*			
1	69.7	0.0	0.0	69.7	0.0	0.0	0.0	0.01
2	71.41	0.0	0.0	0.28	76.8	0.0	0.0	5.39
3	73.13	0.0	0.0	0.38	79.57	0.0	0.0	6.45
4	74.84	0.0	0.0	0.47	81.67	0.0	0.0	6.83
5	76.55	0.0	0.0	0.53	83.42	0.0	0.0	6.87
6	78.27	0.0	0.0	0.59	84.96	0.0	0.0	6.69
7	79.98	0.0	0.0	0.65	86.34	0.0	0.0	6.35
8	81.7	0.0	0.0	0.7	87.6	0.0	0.0	5.9
9	83.41	0.0	0.0	0.74	88.77	0.0	0.0	5.36
10	85.12	0.0	0.0	0.78	89.87	0.0	0.0	4.75
11	86.84	0.0	0.0	0.82	90.91	0.0	0.0	4.07
12	88.55	0.0	0.0	0.86	91.89	0.0	0.0	3.33
13	90.27	0.0	0.0	0.9	92.82	0.0	0.0	2.56
14	91.98	0.0	0.0	0.93	93.72	0.0	0.0	1.74
15	93.7	0.0	0.0	0.97	94.58	0.0	0.0	0.89
16	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.01
17	69.7	0.0	0.0	69.7	0.0	0.0	0.0	0.01
18	76.13	0.0	0.0	0.52	83.01	0.0	0.0	6.88
19	82.55	0.0	0.0	0.72	88.2	0.0	0.0	5.64
20	88.98	0.0	0.0	0.87	92.13	0.0	0.0	3.14
21	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIELAB} = 4.2$

Mean lightness difference (5 steps) $\Delta L^*_{CIELAB} = 3.1$

Mean colour reproduction index: $R^*_{ab,m} = 82$

OE800-3N-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

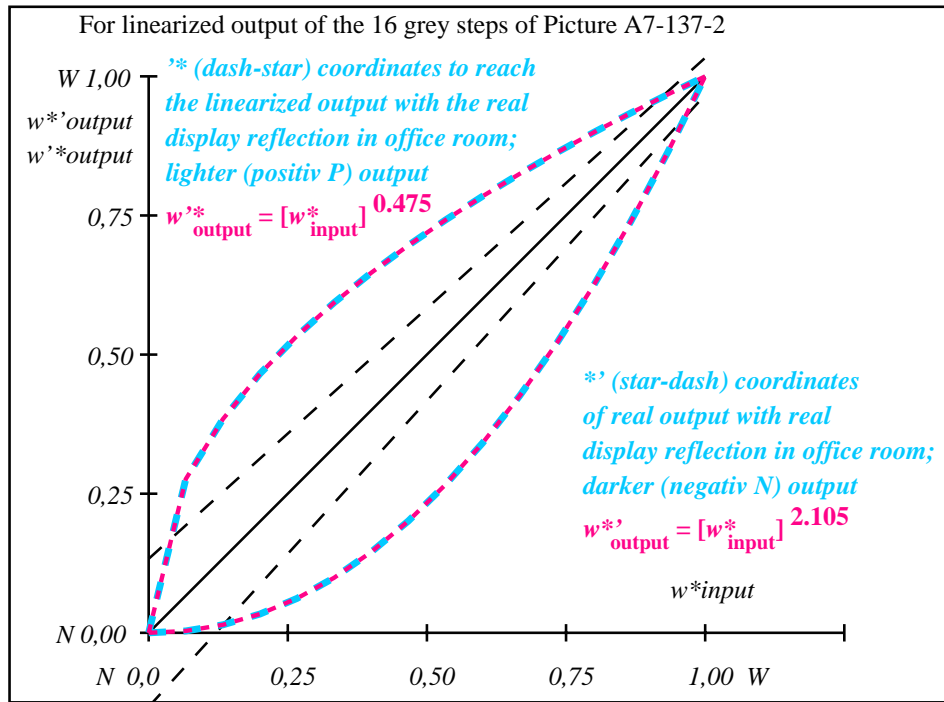

OE801-3N-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	69.7/40.3	71.4/42.8	73.1/45.4	74.8/48.0	76.6/50.8	78.3/53.7	80.0/56.6	81.7/59.7	83.4/62.9	85.1/66.3	86.8/69.7	88.6/73.2	90.3/76.9	92.0/80.7	93.7/84.6	95.4/88.6
$w^* w^* w^*$ setrgb	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$ (relative)	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
$w^*_{intended}$	0.0	0.277	0.384	0.466	0.534	0.593	0.647	0.697	0.742	0.785	0.825	0.863	0.899	0.934	0.968	1.0

OE800-7N, Picture A7-137-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE80: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:40$; Y_N range 30 to <60
 input: $rgb (-> rgb^*_{de})$ setrgbcolor
 output 137-2: $g_P=0.47$; $g_N=1.0$