


See for similar files: <http://www.ps.bam.de/EE95/EE95.HTM>  
Information and Order: <http://www.ps.bam.de> Version 2.0, io=1,6; iORS; oORS, CIELAB

BAM registration: 20030101-EE95/10S/S95E06FP.PS/.PDF BAM material: code=rha4ta  
application for measurement of monitor (Yr=2.5) and printer output

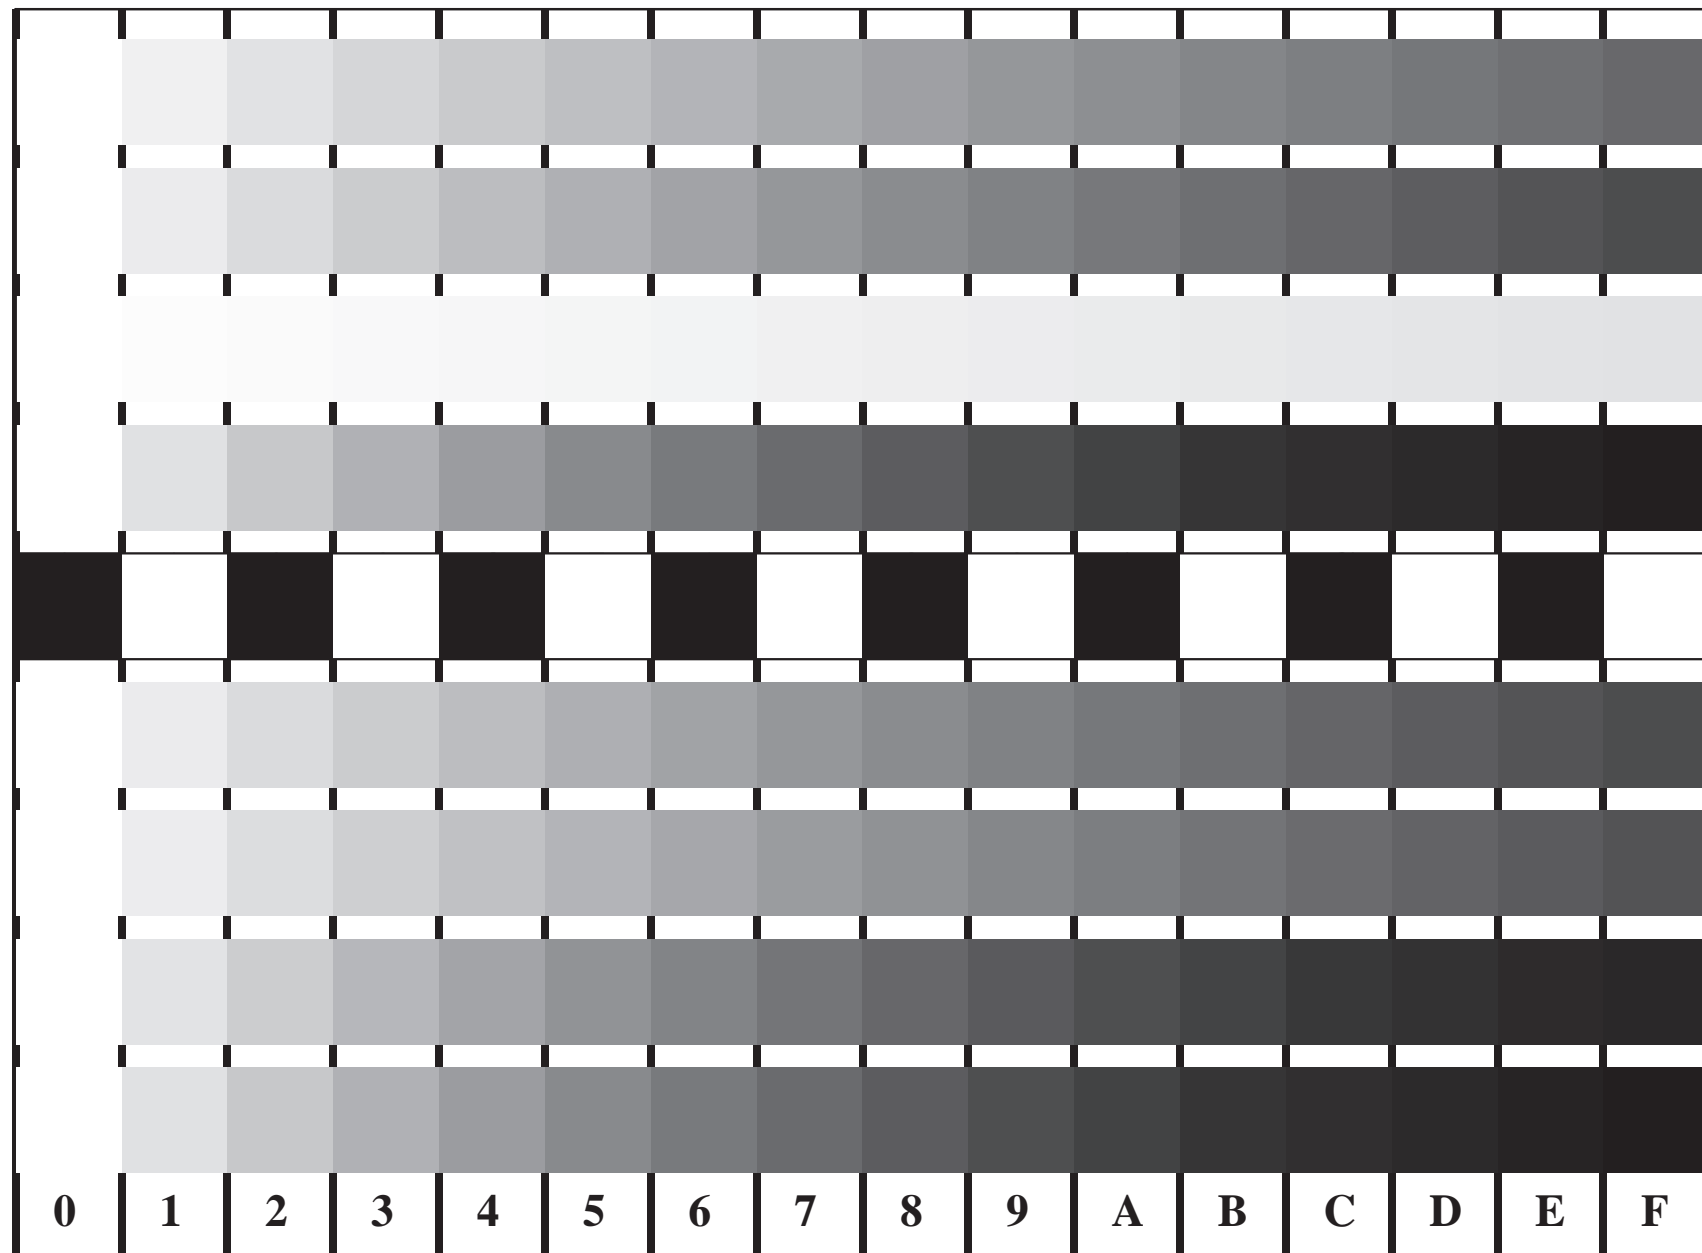

$C_{olv^*}$   
 $M_{o0v^*}$   
 $Y_{o10^*}$   
 $N_{w^*}$   
 $O_{o00^*}$   
 $L_{o10^*}$   
 $V_{o0v^*}$   
 $N_{www^*}$   
\*=input

Picture B4 and D4: 16 equidistant steps **B4**: W-C, W-M, W-Y and W-N; **D4**: W-O, W-L, W-V and W-N(CMY); Use of PS operator; B4:  $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$ ; D4:  $olv^* \text{ setrgbcolor}$  (only)





Fig. B4 of ISO/IEC-test chart 2 and  
Fig. D4 of ISO/IEC-test chart no. 4;

ISO/IEC 15775 and  
TR ISO/IEC 24705;

input:  $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$   
output:  $000n^* \text{ setcmykcolor}$

