



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: $w^*lin\ 1.0\ exp\ setgray$

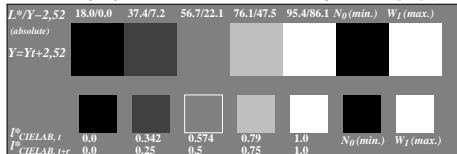


Picture C2: 5 visual equidistant L^* -gray steps + N_0 + W_1 ; PS operator: $w^*lin\ 1.0\ exp\ setgray$

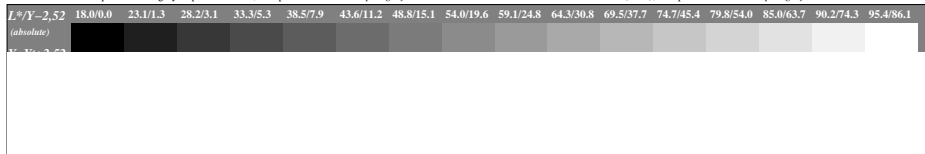


Picture C3: 16 visual equidistant L^* -gray steps; PS operator: $w^*lin\ 1.0\ exp\ setgray$; use file www.bam.de/IE87/10B/B87E00NA.PS or [/B87E00NP.PDF](http://www.bam.de/IE87/E00NP.PDF) for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3B according to ISO/IEC 15775 and input: $w^*lin\ 1.0\ exp\ setgray$
DIS ISO/IEC 19839-X; output: $w^*lin\ 1.0\ exp\ setgray$

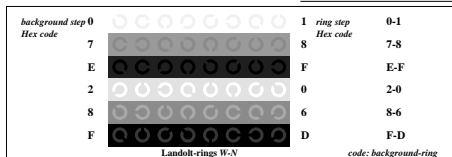

Picture C4: Landolt-rings W-N; PS operator: $w^*lin\ 1.0\ exp\ setgray$

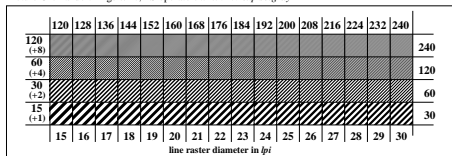

Picture C5: Line raster under 45° (or 135°); PS operator: $w^*lin\ 1.0\ exp\ setgray$

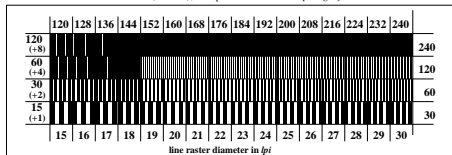

Picture C6: Line raster under 90° (or 0°); PS operator: $w^*lin\ 1.0\ exp\ setgray$