


See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1

<http://130.149.60.45/~farbmetrik/OE67/OE67L0NA.TXT> / .PS; start output, Page 1/3
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)



OE670-7, Picture B1-030-0: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators *settransfer*, 3 *colorimage*

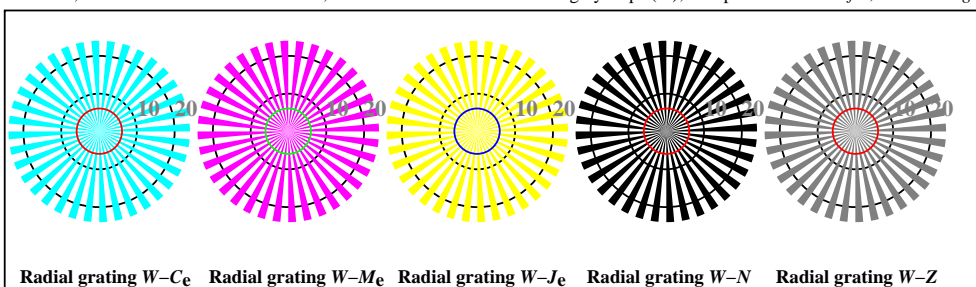


OE670-5, Picture B2W-030-0: Radial gratings W-C_e; W-M_e; W-J_e; W-N; PS operator $\rightarrow \text{rgb}_e \text{ setrgbcolor}$




OE670-7, Picture B3W-030-0: 14 CIE-test colours and 2 + 16 grey steps; PS operator $\rightarrow \text{rgb}_e \text{ setrgbcolor}$


OE67: Test chart 2 according to ISO 15775, TR 24705; DH
Image, radial gratings, 16 step colour scales, Landolt-rings

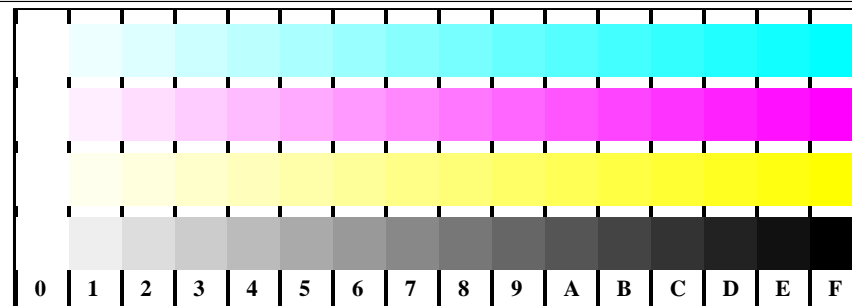


OE671-1, Picture B4W-L-030-0: 16 equidistant steps W-C_e; W-M_e; W-J_e; W-N; PS: $\rightarrow \text{rgb}_e \text{ setrgbcolor}$

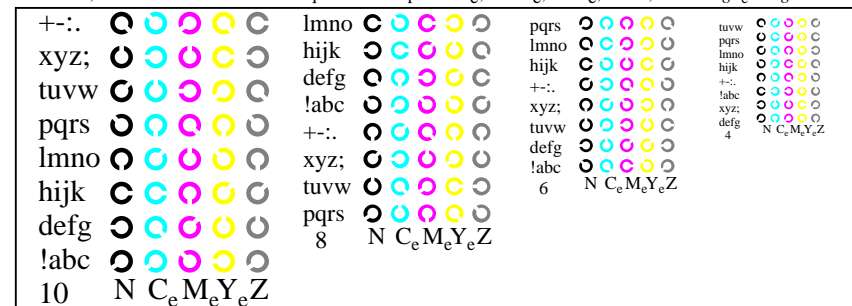

OE671-3, Picture B5W-030-0: Script and Landolt-rings N; C_e; M_e; Y_e; Z; PS operator $\rightarrow \text{rgb}_e \text{ setrgbcolor}$

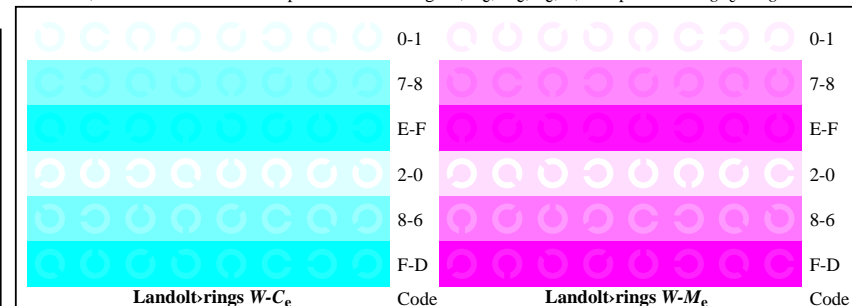

OE671-5, Picture B6W-L-030-0: Landolt-rings W-C_e; W-M_e; PS operator $\rightarrow \text{rgb}_e \text{ setrgbcolor}$

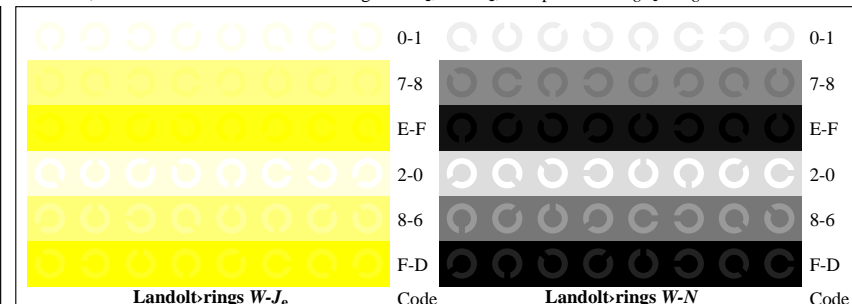

OE671-7, Picture B7W-L-030-0: Landolt-rings W-J_e; W-N; PS operator $\rightarrow \text{rgb}_e \text{ setrgbcolor}$

input: *rgb* ($\rightarrow \text{rgb}_e$) *setrgbcolor*
output 030-0: no change

TUB registration: 20110801-OE67/OE67L0NA.TXT / .PS
application for output of displays: monitor systems or data projector systems
TUB material: code=th44a

Test for the visual linearized output of Pictures B1W-030-0 to B7W-030-0
Output test with the computer display () or the external display () please mark by (x)!

Test of the (flower) image according to picture B1W-030-0
 Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
 Subjective remarks about the colour reproduction of the (flower) image, the CIE-test colours and the 16 grey steps within the image, for example "less contrast":

Test of the resolution of radial gratings $W-C_d$, $W-M_d$, $W-Y_d$ according to picture B2W-030-0

	$W-C_d$	$W-M_d$	$W-Y_d$	$W-N$	$W-Z$
Is the resolution diameter < 6 mm?	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
Test with magnifying glass (6x), Resolution diameter: mm mm mm mm mm

Test of the 14 CIE-test colours according to picture B3W-030-0
 Are clear (immediately conspicuous) differences recognized between reproduction and test chart? **Yes/No**
 If Yes: How many colours have clear differences? of the given 14 steps: **Steps**

Test of 16 visual equidistant L^* -grey steps according to picture B3W-030-0
 Are the 16 steps on the upper rows distinguishable? **Yes/No**
 If No: How many steps can be distinguished? of the given 16 steps: **Steps**

Part 1 OE670-3N-030-1

Documentation of file format, hardware and software for this test:

PDF-File: <http://130.149.60.45/farbmetrik/OE67/OE67L0NP.PDF> **underline Yes/No**

PS-File: <http://130.149.60.45/farbmetrik/OE67/OE67L0NA.PS> **or underline Yes/No**

Used computer operating system:
 either one of Windows/Mac/Unix/other and version:.....

This evaluation is for the device output: **underline monitor/data projector/printer**
 Device model, driver and version:.....

Device output with PDF/PS-file: **underline PDF/PS-file**

For device output with PDF-file OE67L0NP.PDF:
 either PDF-file transfer "download, copy" to PDF device.....
 or with computer system interpretation by "Display-PDF":.....
 or with software e. g. Adobe-Reader/-Acrobat and version:.....
 or with software e. g. Ghostscript and version:.....

For device output with PS-file OE67L0NA.PS:
 either PS-file transfer "download, copy" to PS device.....
 or with computer system interpretation by "Display-PS":.....
 or with software e. g. Ghostscript and version:.....
 or with software e. g. Mac-Yap and version:.....

Special remarks: Special remarks, e. g. output of Landscape (L)

Part 3 OE670-7N-030-1

Test of 16 visually equally spaced steps of the colour rows $W-C_d$, $W-M_d$, $W-Y_d$ and $W-N$ according to picture B4W-030-0

$W-C_d$ White – Cyanblue: Are all the 16 steps distinguishable? **Yes/No**
 If No: How many steps can be distinguished? of the given 16 steps **Steps**

$W-M_d$ White – Magentared: Are all the 16 steps distinguishable? **Yes/No**
 If No: How many steps can be distinguished? of the given 16 steps **Steps**

$W-Y_d$ White – Yellow: Are all the 16 steps distinguishable? **Yes/No**
 If No: How many steps can be distinguished? of the given 16 steps **Steps**

$W-N$ White – Black: Are all the 16 steps distinguishable? **Yes/No**
 If No: How many steps can be distinguished? of the given 16 steps **Steps**

Test of characters and Landolt-rings in four sizes according to picture B5W-030-0
 Is the recognition frequency > 50% for letters (17 from 32 at least) and for Landolt-rings (minimum 5 of 8)?

Relative size	Letters	Ring N	Ring C_d	Ring M_d	Ring Y_d
10	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
8	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
6	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No
4	Yes/No	Yes/No	Yes/No	Yes/No	Yes/No

Test of recognition frequency of Landolt-rings $W-C_d$, $W-M_d$, $W-Y_d$ and $W-N$ according to pictures B6W-030-0, and B7W-030-0
 Is the recognition frequency of the Landolt-rings > 50% (min. 5 of 8 at least)?

Colour row $W-C_d$ background – ring	Colour row $W-M_d$ background – ring	Colour row $W-Y_d$ background – ring	Colour row $W-N$ background – ring
0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No	0 – 1 Yes/No
7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No	7 – 8 Yes/No
E – F Yes/No	E – F Yes/No	E – F Yes/No	E – F Yes/No
2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No	2 – 0 Yes/No
8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No	8 – 6 Yes/No
F – D Yes/No	F – D Yes/No	F – D Yes/No	F – D Yes/No

Part 1 OE671-3N-030-1

Documentation of assessor colour vision properties for visual assessment
 The assessor has **normal** colour vision according to one test: **underline Yes/No**
 either according to DIN 6160:1996 with Anomaloskop of Nagel **underline Yes/unknown**
 or with test charts using colour points according to Ishihara **underline Yes/unknown**
 or tested with, please specify: **underline Yes/unknown**

For visual evaluation of the display (monitor, data projector) output
 Office workplace illumination is daylight (clouded/north sky) **underline Yes/No**
PDF file: <http://130.149.60.45/farbmetrik/OE67/OE67F1P2.PDF> **underline Yes/No**
PS file: <http://130.149.60.45/farbmetrik/OE67/OE67F1P2.PS> **underline Yes/No**
Picture A7-030-2: contrast range: (>F:0) (F:0) (E:0) (D:0) (C:0) (A:0) (9:0) (7:0) (5:0) (3:0) (<3:0)
 compare standard print output according to ISO/IEC 15775 with range F:0 **underline range**
 Remark: In daylighted offices the contrast range is in many cases:
 on display between: >F:0 and E:0 (monitor), D:0 and 3:0 (data projector)

Only for optional colorimetric specification with PDF/PS file output
PDF-File: <http://130.149.60.45/farbmetrik/OE67/OE67F1P2.PDF> **underline Yes/No**
PS-File: <http://130.149.60.45/farbmetrik/OE67/OE67F1P2.PS> **or underline Yes/No**
picture A7-030-2

colour measurement and specification for:
 CIE standard illuminant D65, 2 degree observer, CIE 45/0 geometry: **underline Yes/No**
 If No, please give other parameters:

Colorimetric specification with PS file for colours in the columns A to T
 Exchange of CIELAB data in file www.ps.bam.de/De17/10L/L17e00NP.PS and transfer
 of the PS-file L17e00NP.PS in PDF-file L17e00NP.PDF **underline Yes/No**
 If No, please describe other method:

Part 4 OE671-7N-030-1

OE67: Form A for test chart 2 according to ISO 15775; DH
 Image, radial gratings, 16 step colour scales, Landolt-rings

input: $rgb(->rgb*_d)$ setrgbcolor
 output 030-1: no change

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*
1	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.07	6.36	0.01
3	12.72	0.0	0.13	12.72	0.01
4	19.08	0.0	0.2	19.08	0.01
5	25.44	0.0	0.27	25.44	0.01
6	31.8	0.0	0.33	31.8	0.01
7	38.16	0.0	0.4	38.16	0.01
8	44.52	0.0	0.47	44.52	0.01
9	50.89	0.0	0.53	50.89	0.01
10	57.25	0.0	0.6	57.25	0.01
11	63.61	0.0	0.67	63.61	0.01
12	69.97	0.0	0.73	69.97	0.01
13	76.33	0.0	0.8	76.33	0.01
14	82.69	0.0	0.87	82.69	0.01
15	89.05	0.0	0.93	89.05	0.01
16	95.41	0.0	1.0	95.41	0.01
17	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.25	23.85	0.01
19	47.71	0.0	0.5	47.71	0.01
20	71.56	0.0	0.75	71.56	0.01
21	95.41	0.0	1.0	95.41	0.01


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.0$

Mean lightness difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.0$

Mean colour reproduction index: $R^*_{ab,m} = 100$

OE670-3N-030-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

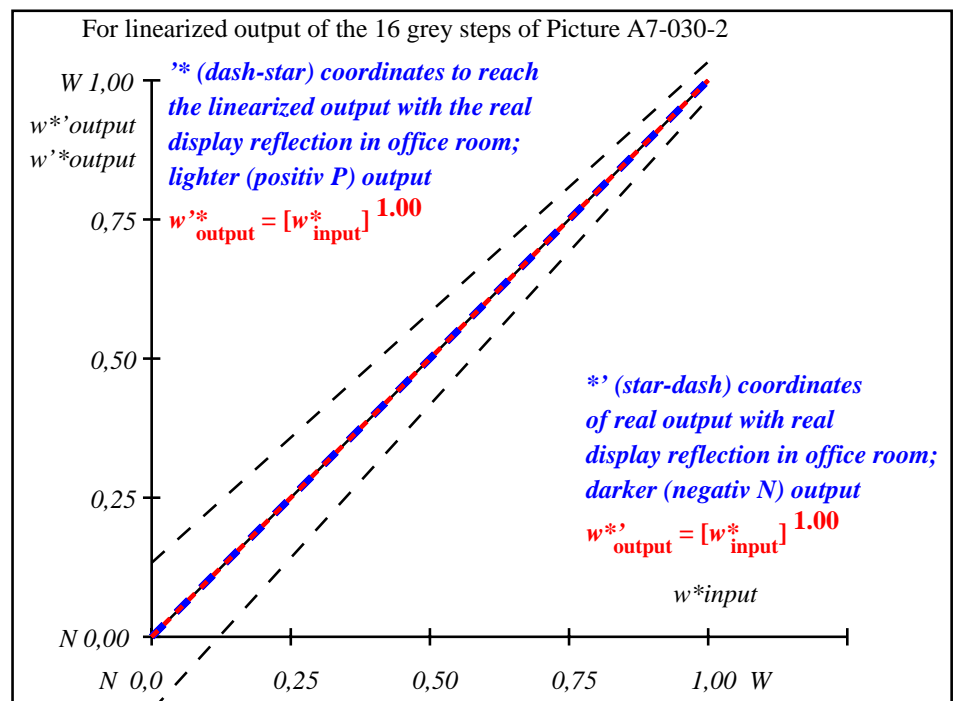

OE671-3N-030-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
$w^* w^* w^*$ setrgb gp=1.00																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*$ CIELAB, r (relative)																
$w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0

OE670-7N, Picture A7-030-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*$ setrgbcolor

OE67: In-output relation according to ISO 9241-306; DH
Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

input: $rgb (-> rgb^*_d)$ setrgbcolor
output 030-2: no change

TUB registration: 20110801-OE67/OE67L0NA.TXT / .PS
application for output of displays: monitor systems or data projector systems
TUB material: code=rh4ta