

Entrada i salida: Laser Reflective System LRS18a


Datos del dispositivo (d) o
elemental (e) color:

H^{*}_{100}
código de tono para los colores
esta página:

$H^{*}_{100} = R00Y_{100}, R25Y_{100}, ..., B75R_{100}$

ORS20a; datos adaptados CIELAB (a)

H^{*}_{100}	$L^{*}=L^{*}_{s} a^{*}_{s}$	b^{*}_{s}	$C^{*}_{s,ab,a}$	$h^{*}_{s,ab,a}$
R00Y_100_100	48.4	66.1	40.2	77.3
R25Y_100_100	56.8	48.0	50.5	69.6
R50Y_100_100	68.6	25.0	63.9	68.6
R75Y_100_100	80.6	4.8	77.2	77.3
Y00G_100_100	90.2	-9.6	88.2	88.7
Y25G_100_100	83.2	-18.4	79.9	81.9
Y50G_100_100	73.3	-31.7	62.7	70.2
Y75G_100_100	62.0	-49.7	43.2	65.8
G00B_100_100	55.8	-65.2	33.8	73.4
G25B_100_100	59.3	-50.3	-9.0	51.0
G50B_100_100	63.0	-30.5	-42.0	51.9
G75B_100_100	45.7	-5.7	-44.6	44.9
B00R_100_100	27.5	25.9	-47.3	53.9
B25R_100_100	38.3	52.6	-28.5	59.8
B50R_100_100	49.5	73.5	-9.0	74.0
B75R_100_100	48.9	69.3	12.9	70.4



%Gama

$u^{*}_{rel} = 114$



%Regularidad

$g^{*}_{H,rel} = 28$

$g^{*}_{C,rel} = 38$

LRS18a; datos adaptados CIELAB (a)

name	$L^{*}=L^{*}_{s} a^{*}_{s}$	b^{*}_{s}	$C^{*}_{s,ab,a}$	$h^{*}_{s,ab,a}$
R_18a	32.5	62.3	46.4	77.7
Y_18a	82.7	-3.1	113.9	114.0
G_18a	39.4	-61.8	45.8	76.9
C_18a	47.8	-26.8	-34.2	43.4
B_18a	10.1	55.1	-61.0	82.2
M_18a	34.5	80.6	-33.9	87.5
N_18a	6.2	0.0	0.0	0.0
W_18a	91.9	0.0	0.0	0.0
R_18c	39.9	58.7	27.9	65.0
Y_18c	81.2	-2.8	71.5	71.6
G_18c	52.2	-42.4	13.6	44.5
B_18c	30.5	1.4	-46.4	46.4

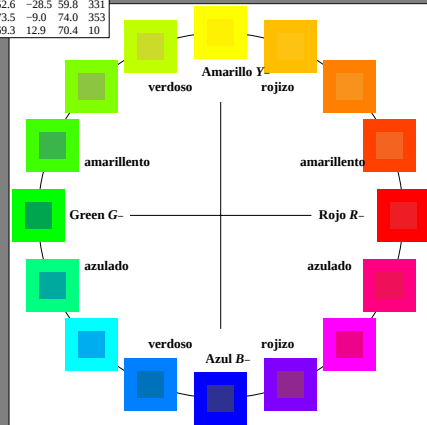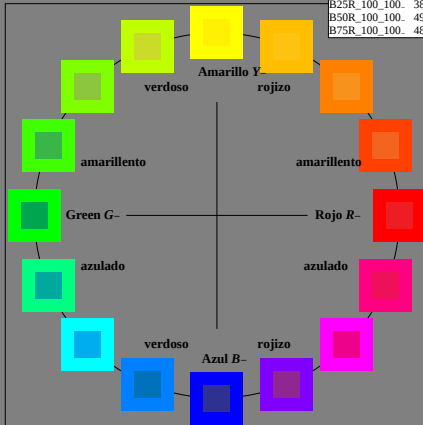

RS850-7N, RGB 2-003031-L0

gráfico TUB-RS85; círculo de tono, 16 pasos, $cf=1$
gráfico según a DIN 33872

entrada: rgb/cmyk -> rgb/cmyk
salida: ningún cambio