



See for similar files: <http://www.ps.bam.de/EE86/>
 Information and Order: <http://www.ps.bam.de>

Version 2.0, io=0,0

BAM registration: 20031201-EE86/10L/L86E03NP.PS/.PDF BAM material: code=tha4ta
 Top part of page: application for monitors (Yr=2.5) and printers

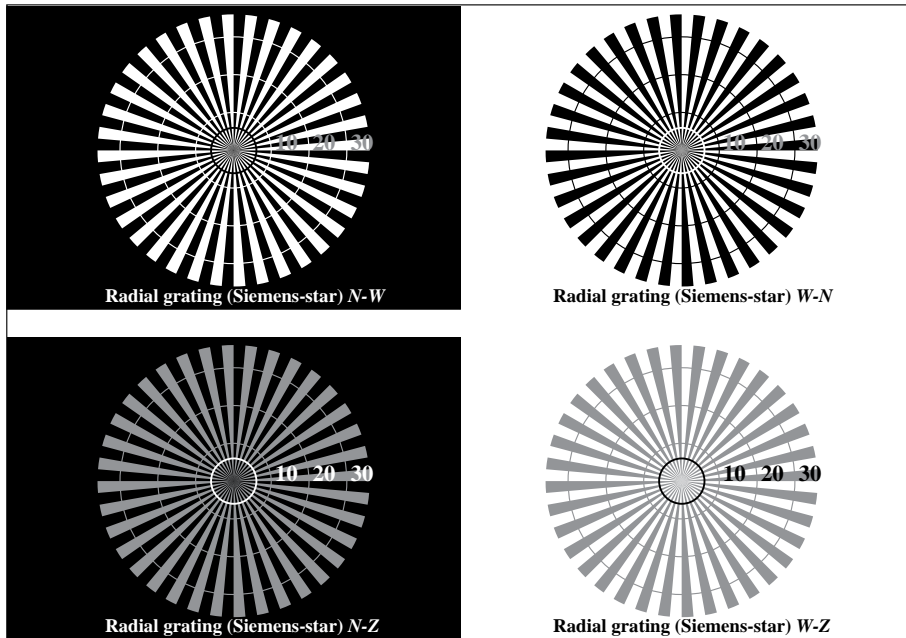

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

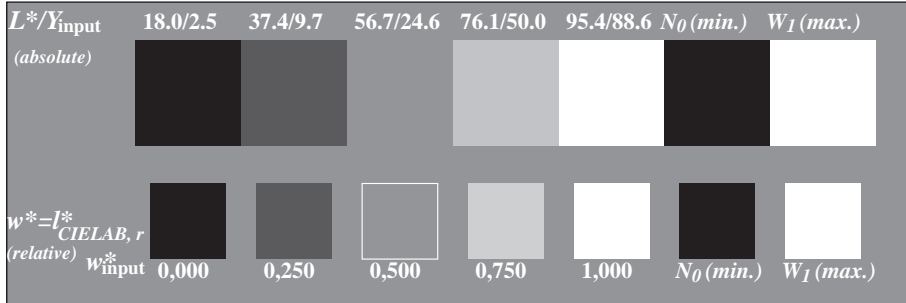


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_I ; PS operator: 000n* setcmykcolor




Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n* setcmykcolor; use file www.bam.de/FE86/10L/L86E0iNA.PS or [L86E0iNP.PS](http://www.bam.de/L86E0iNP.PS).PDF (i=0,7) for PDF systems to complete the figure


ISO/IEC-test chart no. 3 according to ISO/IEC 15775 and input: 000n*lin 1.0 exp setcmykcolor
 DIS ISO/IEC 19839-X; output: 000n*lin 1.0 exp setcmykcolor

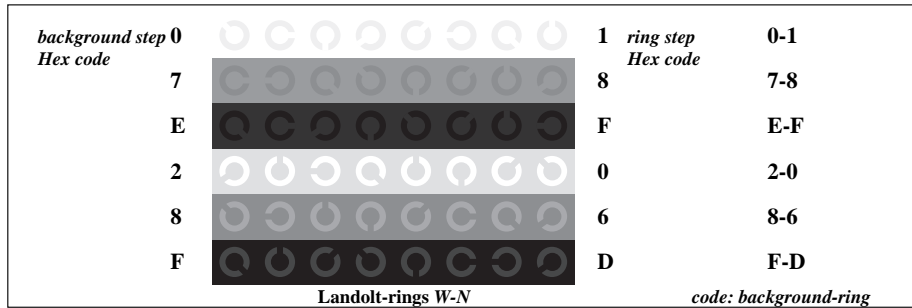

Picture C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

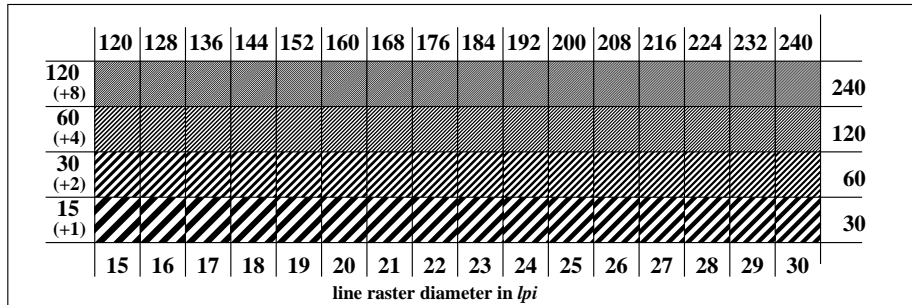

Picture C5: Line raster under 45° (or 135°); PS operator: 000n* setcmykcolor

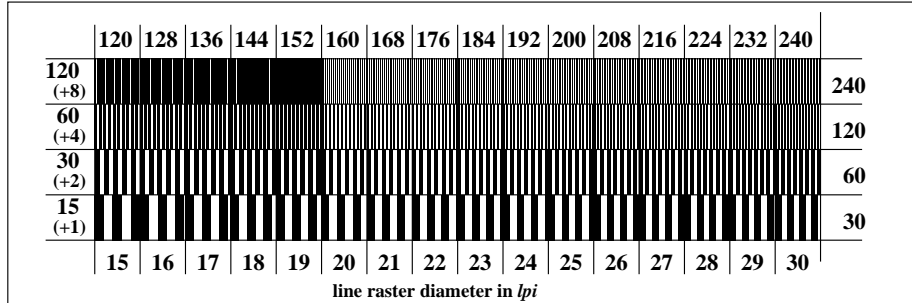

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmykcolor