

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB

TUB registration: 20110801-OE87/OE87L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=rhadata

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*
1	0.0	0.0	0.0	0.0	0.01
2	6.36	0.0	0.07	6.36	0.01
3	12.72	0.0	0.13	12.72	0.01
4	19.08	0.0	0.2	19.08	0.01
5	25.44	0.0	0.27	25.44	0.01
6	31.8	0.0	0.33	31.8	0.01
7	38.16	0.0	0.4	38.16	0.01
8	44.52	0.0	0.47	44.52	0.01
9	50.89	0.0	0.53	50.89	0.01
10	57.25	0.0	0.6	57.25	0.01
11	63.61	0.0	0.67	63.61	0.01
12	69.97	0.0	0.73	69.97	0.01
13	76.33	0.0	0.8	76.33	0.01
14	82.69	0.0	0.87	82.69	0.01
15	89.05	0.0	0.93	89.05	0.01
16	95.41	0.0	1.0	95.41	0.01
17	0.0	0.0	0.0	0.0	0.01
18	23.85	0.0	0.25	23.85	0.01
19	47.71	0.0	0.5	47.71	0.01
20	71.56	0.0	0.75	71.56	0.01
21	95.41	0.0	1.0	95.41	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIE LAB} = 0.0$

Mean lightness difference (5 steps) $\Delta L^*_{CIE LAB} = 0.0$

Mean colour reproduction index: $R^*_{ab,m} = 100$

OE870-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

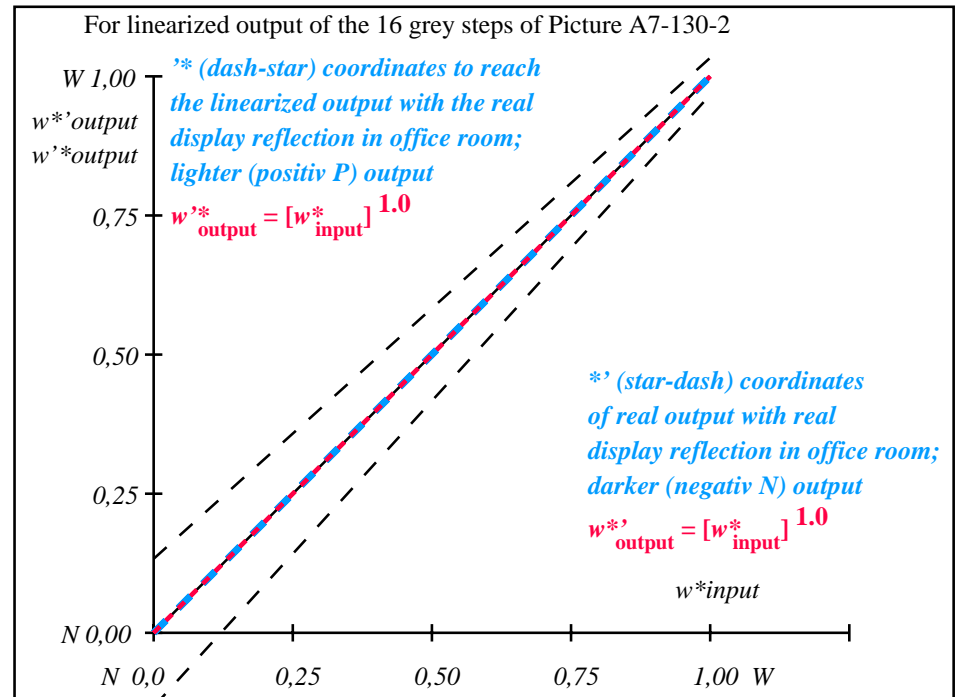

OE871-3N-130-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	0.0/0.0	6.4/0.7	12.7/1.5	19.1/2.8	25.4/4.6	31.8/7.0	38.2/10.2	44.5/14.2	50.9/19.2	57.2/25.2	63.6/32.3	70.0/40.7	76.3/50.4	82.7/61.6	89.0/74.3	95.4/88.6
$w^* w^* w^*$ setrgb gp=1.0																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*$ $w^*_{intended}$	0.000	0.067	0.133	0.200	0.267	0.333	0.400	0.467	0.533	0.600	0.667	0.733	0.800	0.867	0.933	1.000
w^*_{out}	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.467	0.533	0.6	0.667	0.733	0.8	0.867	0.933	1.0

OE870-7N, Picture A7-130-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{setrgbcolor}$

OE87: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:0,31$; Y_N range 0,0 to <0,46

input: $cmy0 (-> cmy0^*_{de})_{setcmyk}$
 output 130-2: $gp=1.0$; $g_N=1.0$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB


TUB registration: 20110801-OE87/OE87L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=rhadata

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*
1	5.69	0.0	0.0	5.69	0.0
2	11.67	0.0	0.04	9.36	0.0
3	17.65	0.0	0.09	14.01	0.0
4	23.63	0.0	0.15	19.12	0.0
5	29.62	0.0	0.21	24.55	0.0
6	35.6	0.0	0.27	30.23	0.0
7	41.58	0.0	0.34	36.12	0.0
8	47.56	0.0	0.41	42.19	0.0
9	53.54	0.0	0.48	48.42	0.0
10	59.52	0.0	0.55	54.79	0.0
11	65.5	0.0	0.62	61.29	0.0
12	71.48	0.0	0.69	67.91	0.0
13	77.47	0.0	0.77	74.64	0.0
14	83.45	0.0	0.84	81.47	0.0
15	89.43	0.0	0.92	88.4	0.0
16	95.41	0.0	1.0	95.41	0.0
17	5.69	0.0	0.0	5.69	0.0
18	28.12	0.0	0.19	23.17	0.0
19	50.55	0.0	0.44	45.29	0.0
20	72.98	0.0	0.71	69.58	0.0
21	95.41	0.0	1.0	95.41	0.0

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIE LAB} = 3.4$
 Mean lightness difference (5 steps) $\Delta L^*_{CIE LAB} = 2.7$
 Mean colour reproduction index: $R^*_{ab,m} = 85$

OE870-3N-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

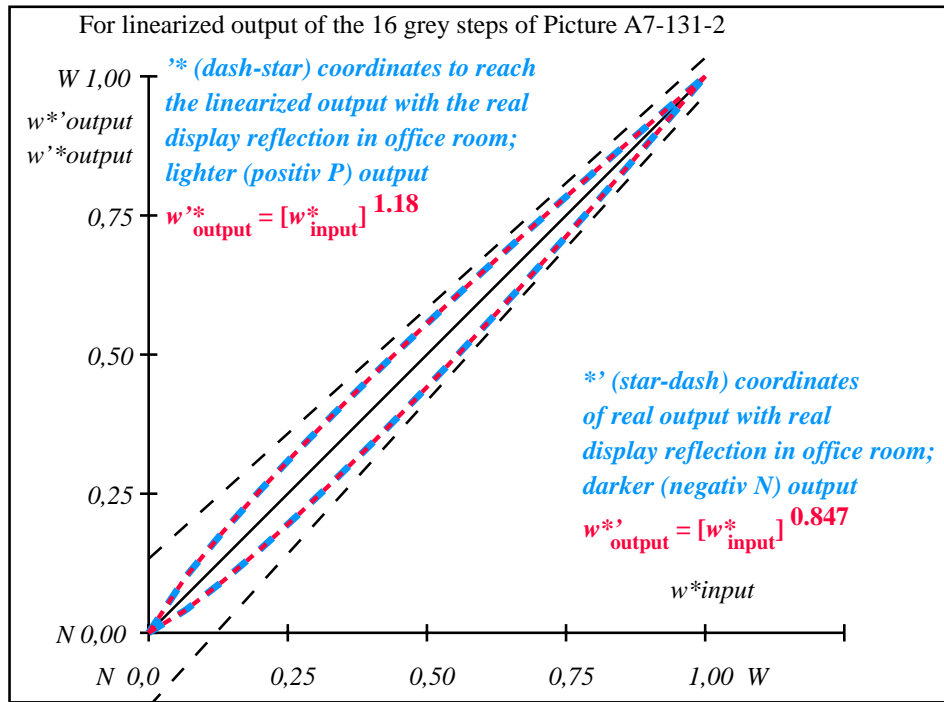

OE871-3N-131-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	5.7/0.6	11.7/1.4	17.7/2.4	23.6/4.0	29.6/6.1	35.6/8.8	41.6/12.2	47.6/16.5	53.5/21.5	59.5/27.6	65.5/34.7	71.5/42.9	77.5/52.3	83.4/63.0	89.4/75.1	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N = 1.18$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIE LAB, r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,041	0,093	0,15	0,211	0,273	0,339	0,407	0,476	0,547	0,62	0,693	0,769	0,845	0,921	1,0

OE870-7N, Picture A7-131-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{setrgbcolor}$

OE87: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:0,62$; Y_N range 0,46 to <0,93
 input: $cmy0 (-> cmy0^*_{de})_{setcmyk}$
 output 130-2: $g_P=1.0$; $g_N=1.08$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB


TUB registration: 20110801-OE87/OE87L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=rhadata

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*
1	10.99	0.0	0.0	10.99	0.0
2	16.62	0.0	0.03	13.12	0.0
3	22.25	0.0	0.06	16.44	0.0
4	27.88	0.0	0.11	20.45	0.0
5	33.5	0.0	0.17	24.98	0.0
6	39.13	0.0	0.22	29.94	0.0
7	44.76	0.0	0.29	35.27	0.0
8	50.39	0.0	0.35	40.93	0.0
9	56.02	0.0	0.43	46.9	0.0
10	61.64	0.0	0.5	53.13	0.0
11	67.27	0.0	0.58	59.63	0.0
12	72.9	0.0	0.66	66.36	0.0
13	78.53	0.0	0.74	73.31	0.0
14	84.15	0.0	0.82	80.48	0.0
15	89.78	0.0	0.91	87.85	0.0
16	95.41	0.0	1.0	95.41	0.0
17	10.99	0.0	0.0	10.99	0.0
18	32.1	0.0	0.15	23.81	0.0
19	53.2	0.0	0.39	43.88	0.0
20	74.31	0.0	0.68	68.08	0.0
21	95.41	0.0	1.0	95.41	0.0


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIELAB} = 6.0$
 Mean lightness difference (5 steps) $\Delta L^*_{CIELAB} = 4.8$
 Mean colour reproduction index: $R^*_{ab,m} = 74$

OE870-3N-132-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

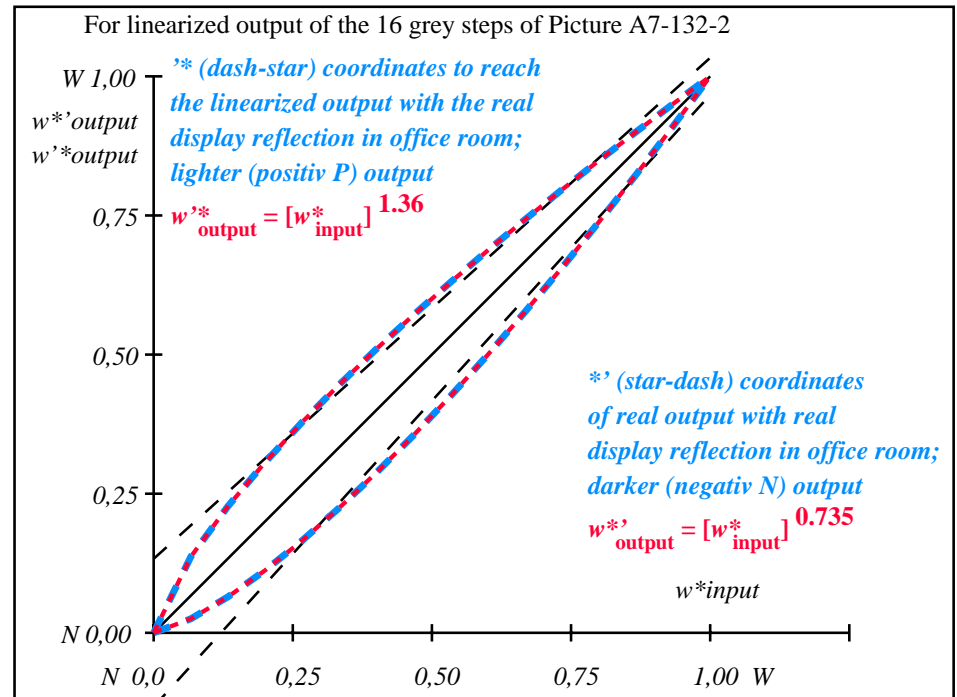

OE871-3N-132-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

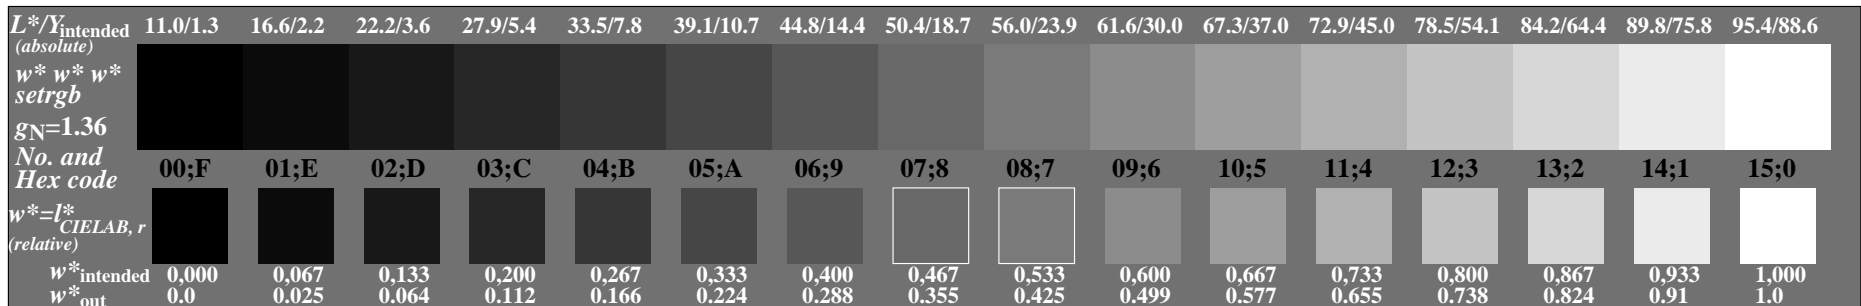

OE870-7N, Picture A7-132-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{setrgbcolor}$

OE87: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:1,25$; Y_N range 0,93 to <1,87

input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
 output 130-2: $g_P=1.0$; $g_N=1.17$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*
1	18.01 0.0 0.0	0.0 18.01 0.0	0.0 0.0 0.0	0.01	
2	23.17 0.0 0.0	0.02 19.2 0.0	0.0 -3.95 0.0	3.96	
3	28.33 0.0 0.0	0.04 21.49 0.0	0.0 -6.83 0.0	6.84	
4	33.49 0.0 0.0	0.08 24.5 0.0	0.0 -8.98 0.0	8.99	
5	38.65 0.0 0.0	0.13 28.12 0.0	0.0 -10.52 0.0	10.53	
6	43.81 0.0 0.0	0.18 32.26 0.0	0.0 -11.53 0.0	11.54	
7	48.97 0.0 0.0	0.24 36.89 0.0	0.0 -12.07 0.0	12.08	
8	54.13 0.0 0.0	0.31 41.94 0.0	0.0 -12.18 0.0	12.19	
9	59.29 0.0 0.0	0.38 47.41 0.0	0.0 -11.87 0.0	11.88	
10	64.45 0.0 0.0	0.46 53.25 0.0	0.0 -11.19 0.0	11.2	
11	69.61 0.0 0.0	0.54 59.46 0.0	0.0 -10.14 0.0	10.15	
12	74.77 0.0 0.0	0.62 66.02 0.0	0.0 -8.74 0.0	8.75	
13	79.93 0.0 0.0	0.71 72.9 0.0	0.0 -7.02 0.0	7.03	
14	85.09 0.0 0.0	0.8 80.1 0.0	0.0 -4.98 0.0	4.99	
15	90.25 0.0 0.0	0.9 87.61 0.0	0.0 -2.63 0.0	2.64	
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.01	
17	18.01 0.0 0.0	0.0 18.01 0.0	0.0 0.0 0.0	0.01	
18	37.36 0.0 0.0	0.12 27.16 0.0	0.0 -10.19 0.0	10.2	
19	56.71 0.0 0.0	0.34 44.63 0.0	0.0 -12.07 0.0	12.08	
20	76.06 0.0 0.0	0.64 67.71 0.0	0.0 -8.34 0.0	8.35	
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.01	


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIELAB} = 7.7$

Mean lightness difference (5 steps) $\Delta L^*_{CIELAB} = 6.1$

Mean colour reproduction index: $R^*_{ab,m} = 66$

OE870-3N-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

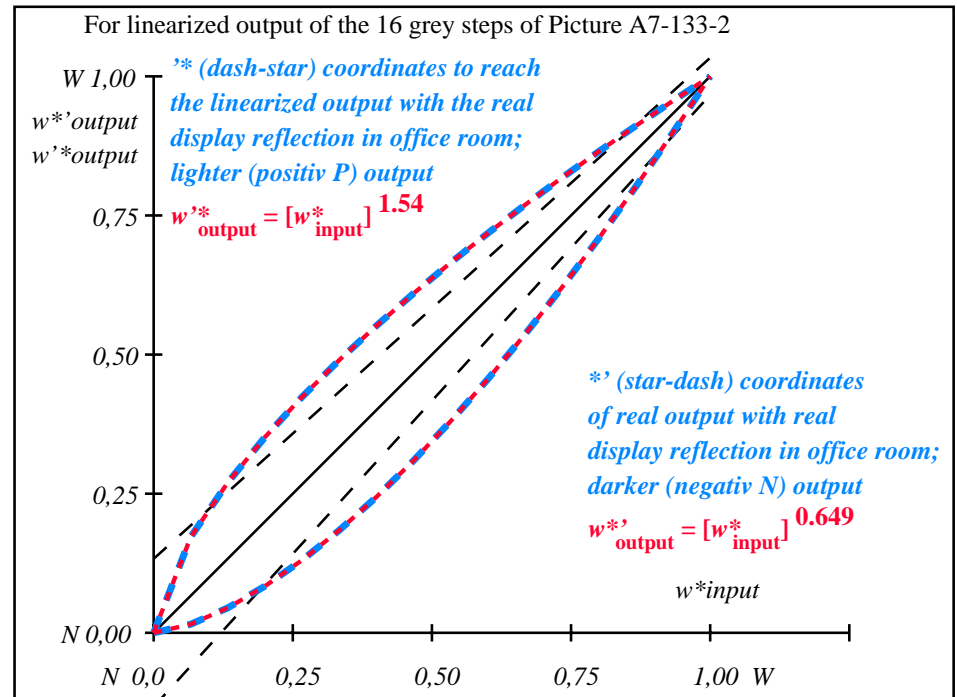

OE871-3N-133-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	18.0/2.5	23.2/3.8	28.3/5.6	33.5/7.8	38.6/10.5	43.8/13.7	49.0/17.6	54.1/22.1	59.3/27.3	64.4/33.4	69.6/40.2	74.8/47.9	79.9/56.6	85.1/66.2	90.2/76.8	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N=1.54$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,016	0,045	0,084	0,131	0,184	0,244	0,31	0,379	0,455	0,536	0,62	0,709	0,803	0,899	1,0

OE870-7N, Picture A7-133-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{setrgbcolor}$

OE87: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:2,5$; Y_N range 1,87 to <3,75

input: $cmy0 (->cmy0^*_{de})_{setcmyk}$
 output 130-2: $g_P=1.0$; $g_N=1.29$

TUB registration: 20110801-OE87/OE87L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=rhadata

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB

TUB registration: 20110801-OE87/OE87L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=rhadata

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*
1	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.01	
2	31.42 0.0 0.0	0.01 27.5 0.0	0.0 -3.91 0.0	3.92	
3	35.99 0.0 0.0	0.03 28.99 0.0	0.0 -6.99 0.0	7.0	
4	40.56 0.0 0.0	0.06 31.15 0.0	0.0 -9.4 0.0	9.41	
5	45.13 0.0 0.0	0.1 33.91 0.0	0.0 -11.21 0.0	11.22	
6	49.7 0.0 0.0	0.15 37.21 0.0	0.0 -12.48 0.0	12.49	
7	54.27 0.0 0.0	0.21 41.03 0.0	0.0 -13.24 0.0	13.25	
8	58.84 0.0 0.0	0.27 45.33 0.0	0.0 -13.5 0.0	13.51	
9	63.41 0.0 0.0	0.34 50.1 0.0	0.0 -13.3 0.0	13.31	
10	67.99 0.0 0.0	0.42 55.33 0.0	0.0 -12.65 0.0	12.66	
11	72.56 0.0 0.0	0.5 60.98 0.0	0.0 -11.56 0.0	11.57	
12	77.13 0.0 0.0	0.59 67.06 0.0	0.0 -10.05 0.0	10.06	
13	81.7 0.0 0.0	0.68 73.56 0.0	0.0 -8.13 0.0	8.14	
14	86.27 0.0 0.0	0.78 80.45 0.0	0.0 -5.81 0.0	5.82	
15	90.84 0.0 0.0	0.89 87.74 0.0	0.0 -3.09 0.0	3.1	
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.01	
17	26.85 0.0 0.0	0.0 26.85 0.0	0.0 0.0 0.0	0.01	
18	43.99 0.0 0.0	0.09 33.17 0.0	0.0 -10.81 0.0	10.82	
19	61.13 0.0 0.0	0.3 47.66 0.0	0.0 -13.46 0.0	13.47	
20	78.27 0.0 0.0	0.61 68.65 0.0	0.0 -9.61 0.0	9.62	
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.01	


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIELAB} = 8.5$

Mean lightness difference (5 steps) $\Delta L^*_{CIELAB} = 6.8$

Mean colour reproduction index: $R^*_{ab,m} = 63$

OE870-3N-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

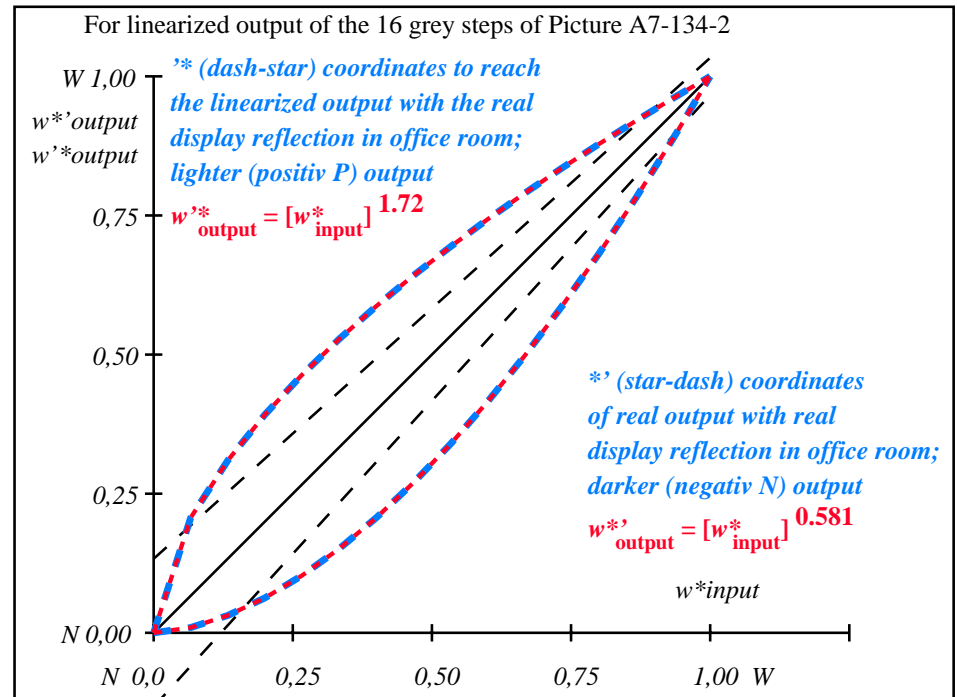

OE871-3N-134-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	26.8/5.0	31.4/6.8	36.0/9.0	40.6/11.6	45.1/14.6	49.7/18.2	54.3/22.2	58.8/26.9	63.4/32.1	68.0/38.0	72.6/44.5	77.1/51.7	81.7/59.7	86.3/68.5	90.8/78.1	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N=1.72$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,01	0,031	0,063	0,103	0,151	0,207	0,27	0,339	0,415	0,498	0,586	0,681	0,782	0,888	1,0

OE870-7N, Picture A7-134-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{setrgbcolor}$

OE87: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:5$; Y_N range 3,75 to <7,5

input: $cmy0 (-> cmy0^*_{de}) setcmyk$
 output 130-2: $g_P=1.0$; $g_N=1.42$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*					
1	37.99	0.0	0.0	37.99	0.0	0.0	0.0	0.0	0.01	
2	41.81	0.0	0.0	0.01	38.32	0.0	0.0	-3.48	0.0	3.49
3	45.64	0.0	0.0	0.02	39.23	0.0	0.0	-6.4	0.0	6.41
4	49.47	0.0	0.0	0.05	40.68	0.0	0.0	-8.78	0.0	8.79
5	53.3	0.0	0.0	0.08	42.65	0.0	0.0	-10.64	0.0	10.65
6	57.13	0.0	0.0	0.12	45.11	0.0	0.0	-12.01	0.0	12.02
7	60.96	0.0	0.0	0.18	48.06	0.0	0.0	-12.89	0.0	12.9
8	64.78	0.0	0.0	0.24	51.48	0.0	0.0	-13.29	0.0	13.3
9	68.61	0.0	0.0	0.3	55.38	0.0	0.0	-13.22	0.0	13.23
10	72.44	0.0	0.0	0.38	59.74	0.0	0.0	-12.69	0.0	12.7
11	76.27	0.0	0.0	0.46	64.56	0.0	0.0	-11.69	0.0	11.7
12	80.1	0.0	0.0	0.55	69.84	0.0	0.0	-10.25	0.0	10.26
13	83.93	0.0	0.0	0.65	75.57	0.0	0.0	-8.35	0.0	8.36
14	87.75	0.0	0.0	0.76	81.74	0.0	0.0	-6.0	0.0	6.01
15	91.58	0.0	0.0	0.88	88.35	0.0	0.0	-3.22	0.0	3.23
16	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.01
17	37.99	0.0	0.0	37.99	0.0	0.0	0.0	0.0	0.0	0.01
18	52.34	0.0	0.0	0.07	42.11	0.0	0.0	-10.22	0.0	10.23
19	66.7	0.0	0.0	0.27	53.37	0.0	0.0	-13.32	0.0	13.33
20	81.05	0.0	0.0	0.58	71.23	0.0	0.0	-9.81	0.0	9.82
21	95.41	0.0	0.0	1.0	95.41	0.0	0.0	0.0	0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIE\text{LAB}} = 8.3$

Mean lightness difference (5 steps) $\Delta L^*_{CIE\text{LAB}} = 6.7$

Mean colour reproduction index: $R^*_{ab,m} = 64$

OE870-3N-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

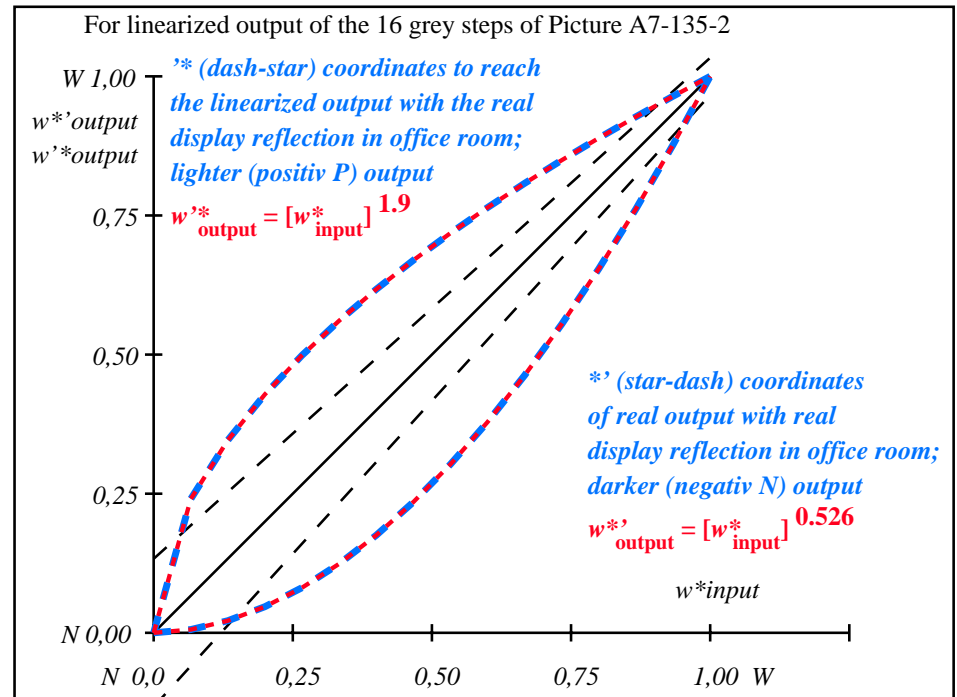

OE871-3N-135-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

L^*/Y_{intended} (absolute)	38.0/10.1	41.8/12.4	45.6/15.0	49.5/18.0	53.3/21.3	57.1/25.1	61.0/29.2	64.8/33.8	68.6/38.8	72.4/44.3	76.3/50.3	80.1/56.9	83.9/63.9	87.8/71.6	91.6/79.8	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N=1.9$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIE\text{LAB}, r}$ (relative)																
w^*_{intended}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,006	0,022	0,047	0,081	0,124	0,175	0,235	0,303	0,379	0,463	0,554	0,654	0,762	0,877	1,0

OE870-7N, Picture A7-135-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{\text{setrgbcolor}}$

OE87: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:10$; Y_N range 7,5 to <15

input: $cmy0 (-> cmy0^*_{\text{de}})_{\text{setcmyk}}$
 output 130-2: $g_P=1.0$; $g_N=1.6$

TUB registration: 20110801-OE87/OE87L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=rhadata

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIE LAB


TUB registration: 20110801-OE87/OE87L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=rhadata

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*
1	52.02 0.0 0.0	0.0 52.02 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
2	54.91 0.0 0.0	0.0 52.17 0.0	0.0 -2.73 0.0	0.0 0.0 0.0	2.74
3	57.8 0.0 0.0	0.02 52.67 0.0	0.0 -5.12 0.0	0.0 0.0 0.0	5.13
4	60.7 0.0 0.0	0.04 53.54 0.0	0.0 -7.14 0.0	0.0 0.0 0.0	7.15
5	63.59 0.0 0.0	0.06 54.79 0.0	0.0 -8.79 0.0	0.0 0.0 0.0	8.8
6	66.48 0.0 0.0	0.1 56.43 0.0	0.0 -10.04 0.0	0.0 0.0 0.0	10.05
7	69.37 0.0 0.0	0.15 58.47 0.0	0.0 -10.89 0.0	0.0 0.0 0.0	10.9
8	72.27 0.0 0.0	0.2 60.91 0.0	0.0 -11.35 0.0	0.0 0.0 0.0	11.36
9	75.16 0.0 0.0	0.27 63.75 0.0	0.0 -11.4 0.0	0.0 0.0 0.0	11.41
10	78.05 0.0 0.0	0.35 67.01 0.0	0.0 -11.03 0.0	0.0 0.0 0.0	11.04
11	80.95 0.0 0.0	0.43 70.69 0.0	0.0 -10.25 0.0	0.0 0.0 0.0	10.26
12	83.84 0.0 0.0	0.52 74.78 0.0	0.0 -9.05 0.0	0.0 0.0 0.0	9.06
13	86.73 0.0 0.0	0.63 79.3 0.0	0.0 -7.42 0.0	0.0 0.0 0.0	7.43
14	89.62 0.0 0.0	0.74 84.24 0.0	0.0 -5.38 0.0	0.0 0.0 0.0	5.39
15	92.52 0.0 0.0	0.87 89.61 0.0	0.0 -2.9 0.0	0.0 0.0 0.0	2.91
16	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
17	52.02 0.0 0.0	0.0 52.02 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01
18	62.87 0.0 0.0	0.06 54.44 0.0	0.0 -8.41 0.0	0.0 0.0 0.0	8.42
19	73.71 0.0 0.0	0.24 62.28 0.0	0.0 -11.42 0.0	0.0 0.0 0.0	11.43
20	84.56 0.0 0.0	0.55 75.87 0.0	0.0 -8.68 0.0	0.0 0.0 0.0	8.69
21	95.41 0.0 0.0	1.0 95.41 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.01

Mean lightness difference (16 steps) $\Delta E^*_{CIE LAB} = 7.1$
 Mean lightness difference (5 steps) $\Delta L^*_{CIE LAB} = 5.7$
 Mean colour reproduction index: $R^*_{ab,m} = 69$

OE870-3N-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

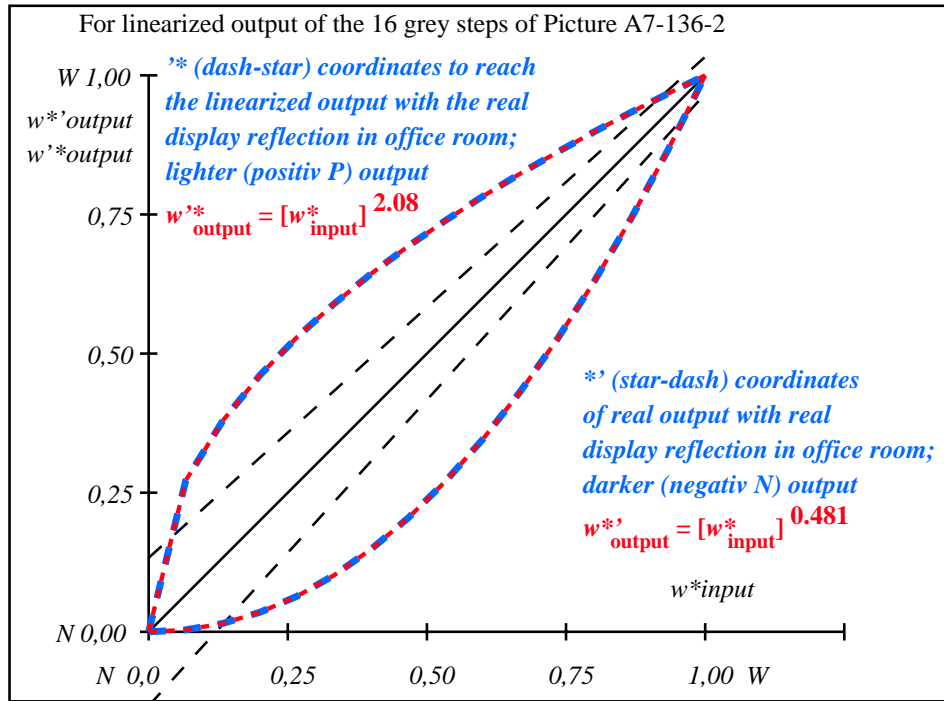

OE871-3N-136-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	52.0/20.2	54.9/22.8	57.8/25.8	60.7/28.9	63.6/32.3	66.5/36.0	69.4/39.9	72.3/44.1	75.2/48.5	78.1/53.3	80.9/58.4	83.8/63.8	86.7/69.5	89.6/75.5	92.5/81.9	95.4/88.6
$w^* w^* w^*$ setrgb	[Color bars]															
$g_N=2.08$	[Color bars]															
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIE LAB, r}$ (relative)	[Color bars]															
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,004	0,015	0,035	0,064	0,102	0,149	0,205	0,27	0,346	0,431	0,524	0,629	0,743	0,866	1,0

OE870-7N, Picture A7-136-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{setrgbcolor}$

OE87: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:20$; Y_N range 15 to <30
 input: $cmy0 (-> cmy0^*_{de}) setcmyk$
 output 130-2: $g_P=1.0$; $g_N=1.81$

See similar ISO test charts: <http://www.ps.bam.de/24705TE>, <http://www.ps.bam.de/9241E>
 Technical information: <http://www.ps.bam.de/33872E> Version 2.1, io=1,1, CIELAB

TUB registration: 20110801-OE87/OE87L0NA.TXT /.PS
 application for output of displays: monitor systems or data projector systems
 TUB material: code=rhadata

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE^*				
1	69.7	0.0	0.0	69.7	0.0	0.0	0.0	0.0	0.01
2	71.41	0.0	0.0	69.75	0.0	0.0	-1.65	0.0	1.66
3	73.13	0.0	0.0	69.97	0.0	0.0	-3.15	0.0	3.16
4	74.84	0.0	0.0	70.37	0.0	0.0	-4.46	0.0	4.47
5	76.55	0.0	0.0	70.99	0.0	0.0	-5.55	0.0	5.56
6	78.27	0.0	0.0	71.84	0.0	0.0	-6.41	0.0	6.42
7	79.98	0.0	0.0	72.94	0.0	0.0	-7.03	0.0	7.04
8	81.7	0.0	0.0	74.29	0.0	0.0	-7.4	0.0	7.41
9	83.41	0.0	0.0	75.91	0.0	0.0	-7.49	0.0	7.5
10	85.12	0.0	0.0	77.8	0.0	0.0	-7.31	0.0	7.32
11	86.84	0.0	0.0	79.98	0.0	0.0	-6.85	0.0	6.86
12	88.55	0.0	0.0	82.45	0.0	0.0	-6.09	0.0	6.1
13	90.27	0.0	0.0	85.23	0.0	0.0	-5.03	0.0	5.04
14	91.98	0.0	0.0	88.3	0.0	0.0	-3.67	0.0	3.68
15	93.7	0.0	0.0	91.7	0.0	0.0	-1.99	0.0	2.0
16	95.41	0.0	0.0	95.41	0.0	0.0	0.0	0.0	0.01
17	69.7	0.0	0.0	69.7	0.0	0.0	0.0	0.0	0.01
18	76.13	0.0	0.0	70.82	0.0	0.0	-5.3	0.0	5.31
19	82.55	0.0	0.0	75.07	0.0	0.0	-7.48	0.0	7.49
20	88.98	0.0	0.0	83.12	0.0	0.0	-5.85	0.0	5.86
21	95.41	0.0	0.0	95.41	0.0	0.0	0.0	0.0	0.01


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Mean lightness difference (16 steps) $\Delta E^*_{CIELAB} = 4.6$

Mean lightness difference (5 steps) $\Delta L^*_{CIELAB} = 3.7$

Mean colour reproduction index: $R^*_{ab,m} = 80$

OE870-3N-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

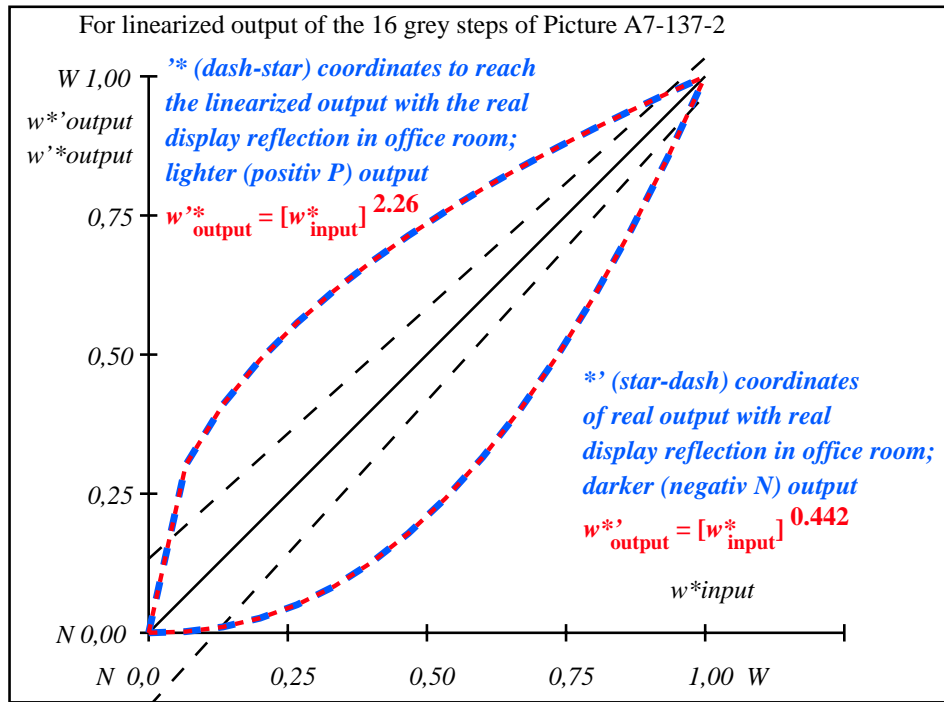

OE871-3N-137-2: File: Measure unknown; Device: Device unknown; Date: Date unknown

$L^*/Y_{intended}$ (absolute)	69.7/40.3	71.4/42.8	73.1/45.4	74.8/48.0	76.6/50.8	78.3/53.7	80.0/56.6	81.7/59.7	83.4/62.9	85.1/66.3	86.8/69.7	88.6/73.2	90.3/76.9	92.0/80.7	93.7/84.6	95.4/88.6
$w^* w^* w^*$ setrgb																
$g_N=2.26$																
No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{CIELAB, r}$ (relative)																
$w^*_{intended}$	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{out}	0,0	0,002	0,01	0,026	0,051	0,083	0,126	0,179	0,241	0,315	0,4	0,496	0,604	0,724	0,855	1,0

OE870-7N, Picture A7-137-2: 16 visual equidistant L^* -grey steps; PS operator: $w^* w^* w^*_{setrgbcolor}$

OE87: In-output relation according to ISO 9241-306; 1MR, DEH
 Viewing Y contrast $Y_W:Y_N=88,9:40$; Y_N range 30 to <60
 input: $cmy0$ ($\rightarrow cmy0^*_{de}$) $setcmyk$
 output 130-2: $g_P=1.0$; $g_N=2.1$